600/7-80-072

United States
Environmental Protection
Agency

Industrial Environmental Research
Laboratory
Cincinnati OH 45268

EPA-600/7-80-072
April 1980

Research and Development

EPA

# Development of Methods to Improve Performance of Surface Mine Sediment Basins

## Phase I

NEWARK PUBLIC LIBRARY

JUL 23 1980

U. S. GOVT. PUBS.
DEPOSITORY 375

## Interagency Energy/Environment R&D Program Report

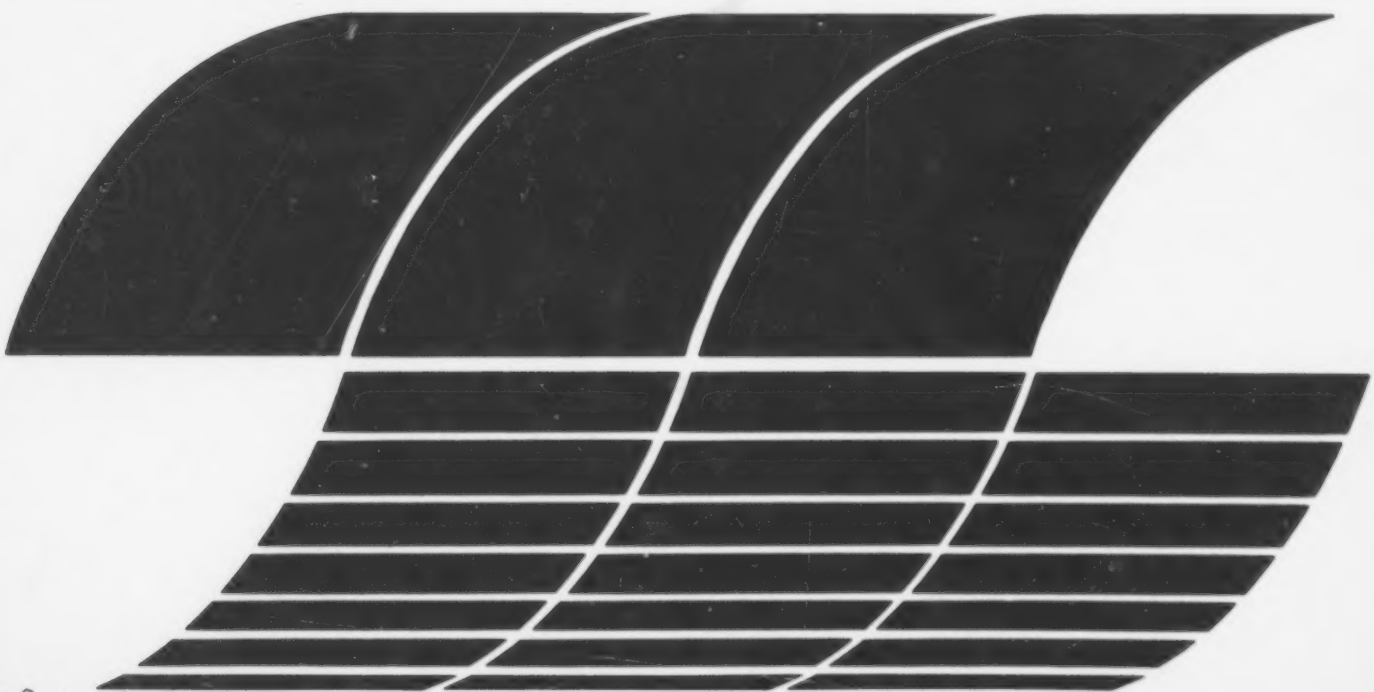

EP 1.23/8:

## RESEARCH REPORTING SERIES

Research reports of the Office of Research and Development, U.S. Environmental Protection Agency, have been grouped into nine series. These nine broad categories were established to facilitate further development and application of environmental technology. Elimination of traditional grouping was consciously planned to foster technology transfer and a maximum interface in related fields. The nine series are:

1. Environmental Health Effects Research
2. Environmental Protection Technology
3. Ecological Research
4. Environmental Monitoring
5. Socioeconomic Environmental Studies
6. Scientific and Technical Assessment Reports (STAR)
7. Interagency Energy-Environment Research and Development
8. "Special" Reports
9. Miscellaneous Reports

This report has been assigned to the INTERAGENCY ENERGY-ENVIRONMENT RESEARCH AND DEVELOPMENT series. Reports in this series result from the effort funded under the 17-agency Federal Energy/Environment Research and Development Program. These studies relate to EPA's mission to protect the public health and welfare from adverse effects of pollutants associated with energy systems. The goal of the Program is to assure the rapid development of domestic energy supplies in an environmentally-compatible manner by providing the necessary environmental data and control technology. Investigations include analyses of the transport of energy-related pollutants and their health and ecological effects; assessments of, and development of, control technologies for energy systems; and integrated assessments of a wide range of energy-related environmental issues.

This document is available to the public through the National Technical Information Service, Springfield, Virginia 22161.

EPA-600/7-80-072
April 1980

# DEVELOPMENT OF METHODS TO IMPROVE PERFORMANCE OF SURFACE MINE SEDIMENT BASINS

Phase I

by

Charles E. Ettinger
Skelly and Loy
Harrisburg, Pennsylvania 17110

Contract No. 68-03-2677

Project Officer

Roger C. Wilmoth
Resource Extraction and Handling Division
Industrial Environmental Research Laboratory
Cincinnati, Ohio 45268

INDUSTRIAL ENVIRONMENTAL RESEARCH LABORATORY
OFFICE OF RESEARCH AND DEVELOPMENT
U.S. ENVIRONMENTAL PROTECTION AGENCY
CINCINNATI, OHIO 45268

## DISCLAIMER

This report has been reviewed by the Industrial Environmental Research Laboratory, U.S. Environmental Protection Agency, and approved for publication. Approval does not signify that the contents necessarily reflect the views and policies of the U.S. Environmental Protection Agency, nor does mention of trade names of commercial products constitute endorsement or recommendation for use.

## FOREWORD

When energy and material resources are extracted, processed, converted, and used, the related pollutional impacts on our environment and even on our health often require that new and increasingly more efficient pollution control methods be used. The Industrial Environmental Research Laboratory - Cincinnati (IERL-Ci) assists in developing and demonstrating new and improved methodologies that will meet these needs both efficiently and economically.

This study outlines methods to improve the performance of surface mine sedimentation basins in order to meet the current effluent limitations for suspended solids. This subject has been under study by the Resource Extraction and Handling Division of the Industrial Environmental Research Laboratory which may be contacted for further information.

David G. Stephan
Director
Industrial Environmental Research Laboratory
Cincinnati

## ABSTRACT

This document presents findings of a study to determine methods to improve the performance of surface mine sediment basins. During the course of this study, two methods were investigated: physical and chemical. Physical additions to sediment basins were investigated in an attempt to approach optimum removal potential. Various modifications have been delineated including inlet and outlet redesign along with additions to the body of the pond. It is obvious that even under ideal conditions very small particles will not be removed by conventional sediment basins. It is because of this fact that the use of coagulants has also been studied for small particle removal.

This report was submitted in partial fulfillment of Contract No. 68-03-2677 by Skelly and Loy under the sponsorship of the U.S. Environmental Protection Agency. This report covers the period June 1978 to February 1979, and work was completed as of October 19, 1979.

# CONTENTS


| | Page |
|---|---|
| Foreword | iii |
| Abstract | iv |
| Figures | vi |
| Tables | viii |
| Appendix Tables | ix |
| Acknowledgment | x |
| 1. Introduction | 1 |
| 2. Conclusions | 2 |
| 3. Recommendations | 5 |
| 4. Theory of Suspended Solids Removal | 6 |
| Sedimentation | 6 |
| Coagulation | 13 |
| 5. Discussion of Study Findings | 17 |
| Selection and Evaluation of Model Sediment Ponds | 17 |
| Physical Characteristics of Model Ponds | 21 |
| Evaluation of Model Pond Efficiency | 39 |
| Review of Physical Modification Alternatives | 49 |
| Inlet Modifications | 51 |
| Pond Modifications | 60 |
| Outlet Modifications | 66 |
| Summary | 75 |
| Evaluation of Coagulant Usage | 79 |
| Coagulant Testing Program | 79 |
| The Application of Coagulant Usage in Suspended Solids Removal | 102 |
| References | 107 |
| Bibliography | 109 |
| Appendix | 112 |

## FIGURES


| No. | | Page |
|---|---|---|
| 1 | Discrete Particle Settling | 9 |
| 2 | Determination of Trap Efficiency | 12 |
| 3 | Classification and Size Range of Particles Found in Water | 13 |
| 4 | Concept of Zeta Potential Derived from the Diffuse Double Layer Theory | 15 |
| 5 | Colloidal Suspension Destabilization with High Molecular Weight Organic Polymers | 16 |
| 6 | Excavated Sediment Pond | 18 |
| 7 | Excavated Sediment Dam | 19 |
| 8 | Embankment Sediment Pond | 20 |
| 9 | Location of Model Sediment Ponds | 22 |
| | Sediment Pond: | |
| 10 | PA-1 | 25 |
| 11 | WV-1 | 27 |
| 12 | WV-2A | 30 |
| 13 | WV-2B | 33 |
| 14 | WV-3 | 36 |
| 15 | WV-4 | 38 |
| 16 | KY-1 | 41 |
| | Particle Size Distribution: | |
| 17 | PA-1 | 44 |
| 18 | WV-1 | 45 |
| 19 | WV-2A | 46 |
| 20 | WV-2B | 46 |
| 21 | WV-3 | 47 |
| 22 | WV-4 | 47 |
| 23 | KY-1 | 48 |
| 24 | Influent Energy Dissipation by Dumped Rock | 52 |
| 25 | Log and Pole Silt Structure | 53 |
| 26 | Log Check Dam | 55 |
| 27 | Stone Check Dam | 56 |
| 28 | Flared Apron Entrance Channel | 57 |
| 29 | Sediment Pond Inlet Baffles | 58 |

## FIGURES (continued)


| No. | | Page |
|---|---|---|
| 30 | Baffle Detail | 59 |
| 31 | Multiple Inlets by Inlet Channel Branching | 60 |
| 32 | Straw Bale Barrier | 61 |
| 33 | Silt Fence | 62 |
| 34 | Sediment Pond Baffle Placement to Increase L:W Ratio | 67 |
| 35 | Subsurface Drain | 69 |
| 36 | Single Perforation of Riser Barrier | 70 |
| 37 | Siphon Dewatering Methods | 71 |
| 38 | Riser and Trough Plan and Elevation | 73 |
| 39 | Riser and Trough Details | 74 |
| 40 | Exit Baffle | 75 |
| 41 | Suspended Solids Removal by Anionic Coagulants | 82 |
| 42 | Suspended Solids Removal by Cationic Coagulants | 83 |
| 43 | Suspended Solids and Turbidity Removal by Lime and Alum | 86 |
| 44 | Turbidity Removal by Anionic Coagulants | 87 |
| 45 | Turbidity Removal by Cationic Coagulants | 88 |
| 46 | Flocculation by Baffle Placement | 106 |

# TABLES


| No. | | Page |
|---|---|---|
| 1 | Effect of Water Temperature on Settling Velocity | 7 |
| 2 | Settling Velocities of Sediment in Water | 8 |
| 3 | Minimum Sediment Pond Area Requirements to Settle Particles of Selected Sizes | 10 |
| 4 | Short-Circuiting Factors for Settling Tanks | 11 |
| | Physical Characteristics: | |
| 5 | Sediment Pond PA-1 | 24 |
| 6 | Sediment Pond WV-1 | 26 |
| 7 | Sediment Pond WV-2A | 29 |
| 8 | Sediment Pond WV-2B | 32 |
| 9 | Sediment Pond WV-3 | 35 |
| 10 | Sediment Pond WV-4 | 37 |
| 11 | Sediment Pond KY-1 | 40 |
| 12 | Model Sediment Pond Efficiency | 42 |
| 13 | Water Quality of Model Sediment Ponds | 43 |
| 14 | Sediment Pond Storage Capacity | 49 |
| 15 | Summary of Simulated Sediment Pond Performance | 50 |
| 16 | Scour Velocity vs. Particle Size | 52 |
| 17 | Summary of Sediment Pond Physical Modifications | 76 |
| 18 | Extended Settling Time Results | 92 |
| 19 | Anionic & Cationic Coagulant Removal Summary | 93 |
| 20 | Turbidity and Suspended Solids Removal Alum and Lime | 93 |
| 21 | Selected Coagulants for Bench Scale Testing | 93 |
| 22 | Coagulant Efficiency | 94 |
| 23 | Average Optimum Dosage | 94 |
| 24 | Effluent Suspended Solids at Controlled Temperatures | 96 |
| 25 | Cost of Coagulant Usage | 104 |

## APPENDIX TABLES


| No. | | Page |
|---|---|---|
| A-1 | Coagulant Manufacturer Survey ..... | 112 |
| A-2 | Coagulant/Flocculant Data Form ..... | 124 |
| A-3 | Preliminary Laboratory Test Results ..... | 135 |
| A-4 | Bench-Scale Treatability Study Results ..... | 158 |
| A-5 | Summary of Bench Scale Treatability Study ..... | 172 |

## ACKNOWLEDGMENT

The data presented within this report would not have been possible without the unprecedented cooperation provided by the personnel at the study mine sites. Because these companies prefer to remain anonymous, individuals or company affiliation will not be identified; we would, however, like those involved in this study to know that without their complete cooperation and assistance this study would not have been possible.

Project officers for the U.S. Environmental Protection Agency during the past year were Ronald D. Hill and Roger C. Wilmoth. A special thanks to James Kennedy and the staff of the Crown Environmental Research Laboratory of the U.S. Environmental Protection Agency for their assistance throughout the project.

# SECTION 1

# INTRODUCTION

The control of erosion and sedimentation from disturbed lands is a subject of increasing interest, particularly in the area of surface mining. Given the hydrologic conditions and the steep sloped terrain of the Appalachian coal region, it is understandable that erosion is a severe problem for surface coal mine operators. Current sediment control technology in this industry is primarily in the use of sedimentation ponds.

A study of the regulatory design criteria has shown that coal surface mine sedimentation ponds are generally designed based on two parameters: 1) provide a specific required storage capacity depending upon the amount of disturbed area in the contributing watershed; and 2) provide a required storage capacity to retain the runoff from a particular storm event for a specified period of time. Where influent suspended solid loads are extremely high, a sedimentation pond could meet the design standards, yet the effluent may not be of acceptable quality. Since many states and the Federal government are currently adopting water quality criteria which include the regulation of suspended solids concentration in the effluent, it would appear that the design of sedimentation basins should consider the pond's ability to achieve a specific effluent quality.

A serious problem relating to the achievement of a specific effluent quality, namely suspended solids limitations, relates to the amount of small particulate matter present in the influent to the basin. Disturbance of this material during active mining operations leads to erosion and introduction of an approximately colloidal size suspended solids fraction in the pond influent. Conventional settling procedures will not permit these particles to settle out of suspension; therefore, new procedures must be employed to remove this colloidal fraction. Two methods of achieving this goal have been investigated during this study; physical modifications to existing sediment pond configurations, and the use of chemical coagulants to cause the colloidal particles to agglomerate and settle in a mass. During the course of this study, six representative sediment ponds throughout the Appalachian coal fields have been observed to determine possible improvements to their design in conjunction with laboratory testing of a wet-weather sediment-laden influent sample from each pond. This wet-weather water sample was collected during a moderate rainfall event and was later subjected to a series of bench scale treatability tests to determine the applicability of a group of selected chemical coagulants. Through separate sections of the subsequent text, the results of these studies are discussed.

# SECTION 2

# CONCLUSIONS

Current design criteria for sedimentation basins are based upon the amount of disturbed area in the drainage area of the pond and/or the retention of runoff from a particular storm event for a specified period of time.

According to the theory of sedimentation, several interrelated factors have a substantial effect on the performance of a settling basin:

- Water temperature;
- Characteristics of the particle to be removed;

    Specific gravity
    Size
    Shape
    Aggregation

- Flow rate of drainage into and through the pond;
- Depth;
- Surface area of the pond; and
- Non-ideal conditions in pond;

    Short circuiting
    Turbulence
    Scouring.

- Colloidal-size particles will not settle from solution within normal detention times.

- Colloids remain in solution and resist the forces of gravity because of their extremely small size, chemical combination with water, or surface electrical charge.

- Three general types of sediment ponds are used in Appalachia:

    - Excavated sediment ponds;
    - Excavated sediment dams; and
    - Embankment sediment ponds.

- The laboratory tests indicated the presence of settleable solids in the effluent of each sediment pond studied.

- All model sediment ponds, except KY-1, complied with the effluent limitations for suspended solids during the sampling period. All ponds, except KY-1, exhibited greater than 90% removal during the sampling period.

- According to theoretical analysis, none of the model sediment ponds would meet effluent limitations for suspended solids during the passage of a 10-year 24-hour storm.

- Physical modifications to a sediment pond may be made in three areas:

  - Inlet;
  - Pond Body; and
  - Outlet.

- Inlet modifications are undertaken with three objects in mind:

  - Dissipation of energy of influent;
  - Distribution of influent over the entire width of the pond to maximize use of the cross-sectional area; and
  - Filtration of the influent.

- Pond configuration modifications are limited to two basic concepts;

  - Compartmentalization of the basin to induce staged settling; and
  - Size, shape, and depth modifications.

- Outlet Modifications include:

  - Changes to standard riser barrels;
  - Flared exit channels;
  - Baffle outlets; and
  - Vegetative filters.

- During the laboratory testing phase of this study, cationic coagulants were generally more effective in the removal of suspended solids than anionic coagulants.

- Optimum coagulant dosage varies with characteristics of the subject water but will generally increase with the colloidal suspended solids concentration.

- The suspended solids removal at 4 C was generally less efficient than that at 21 C.

- The environmental impact of coagulant usage for suspended solids removal would be minimal.

- Based upon a flow rate of 0.0283 m /sec (1 cfs), the daily cost (chemical purchase only) for the seven best coagulants tested would range from $6.42 - $40.68.

# SECTION 3

# RECOMMENDATIONS

- Phase II and Phase III of the study should be undertaken to demonstrate the effect of physical modification alternatives on sedimentation basin performance and the technical and economic feasibility of the usage of coagulants for suspended solids removal.

- The coagulants to be used in Phase III demonstration will be one of the two best performing coagulants in the bench-scale treatability tests:

  - American Cyanamid - Magnifloc 587C
  - Calgon Corporation - M-502

- Phase III demonstration should take place in at least two diverse geographic areas. One area to represent the steep topography of the Appalachian region and one to represent the rolling topography of the midwest/western region.

- Surface mine sedimentation basin design criteria should consider the following:

  - A sedimentation volume to settle particles of a specified size depending upon the influent particle size distribution
  - Sludge storage capacity
  - Detention storage capacity for the runoff from a specified storm event

- Whenever possible, sediment control methods should be used as close to the point of sediment origin as is feasible.

- To compensate for non-ideality of sediment basins, physical modifications to the basin should be utilized as detailed in the section of this study which discusses physical modification alternatives.

- When the influent particle size distribution contains high percentages in the silt-clay range, chemical coagulants should be used to achieve sufficient suspended solids removal in order to comply with the effluent limitations.

# SECTION 4

# THEORY OF SUSPENDED SOLIDS REMOVAL

The removal of suspended solids from a liquid medium has been a subject of study for engineers during the past two hundred years. Generally speaking, there are two basic methods of suspended solids removal- physical straining processes and gravity separation. Physical straining is the removal of suspended solids by mechanical filtration while gravity separation refers to suspended solids removal by taking advantage of gravitational forces on the particles. The processes of physical straining are not discussed here because of the inapplicability of this technique to surface mine drainage. The principles of gravity separation are discussed in two subsequent sections, Sedimentation and Coagulation. A discussion of the theory of sedimentation and coagulation is necessary to lay the groundwork for an understanding of the practical aspects of sediment pond design. Without a basic comprehension of the principles of sedimentation, one will not be able to offer criticism of existing sediment pond construction techniques nor develop methods to improve their performance.

## SEDIMENTATION

Sedimentation is a natural sequence of events involving erosion, entrainment, transportation, deposition and compaction of particulate matter in water. Deposition or settling is concieved as a gravitational process. On the basis of concentration and particle interaction, four general classifications of settling have been determined:

1) Free Settling;
2) Flocculant Settling;
3) Zone Settling; and
4) Compression Settling.

Of primary interest to this discussion is free settling, which is described mathematically under ideal conditions by Stoke's Law and is the basis for suspended solids removal by gravitational settling. It has been shown that when a particle is present in a liquid, the particle will move in a verticle direction due to gravity forces, accelerating until a constant velocity is attained. This constant velocity is known as the settling velocity of the particle and is dependent upon the density, size

and shape of the particle and the viscosity of the fluid, which is strongly temperature dependent.

$V_s = g/18\mu \ (P_p - P_w) \ D^2$

$V_s$ = Terminal Settling Velocity, cm/sec
$g$ = Acceleration due to gravity, 981 cm/sec$^2$
$\mu$ = Water viscosity, poise (temperature dependent)
$P_w$ = Water density, g/cm$^3$
$P_p$ = Particle density, g/cm$^3$
$D$ = Particle diameter, cm

As can be seen from the variables in the above formula, the settling velocity of a particle is dependent upon the temperature of the water it is carried in, the specific gravity of the particle itself, and the shape of the particle (spherical, flat, or rod-shaped). Table 1 shows the effect of water temperature on settling velocity using room temperature (20° C) as a standard. The changes in settling velocity were computed by Stoke's Law, varying the viscosity of water at different temperatures and holding all other variables constant.

**TABLE 1. EFFECT OF WATER TEMPERATURE ON SETTLING VELOCITY[1]**

| Temperature °C | Change in settling velocity (percent) |
|---|---|
| 0° | -44 |
| 10° | -23 |
| 20° | 0 |
| 30° | +26 |

Specific gravity is also a factor which may vary widely. For example, the specific gravity for most soil particles is assumed to be 2.65; however, the specific gravity of coal particles will range from 1.29-1.32. Finally, the shape of the particle will affect the settling velocity. Experimental data on the settling velocity of nonspherical particles indicates that a rod-shaped particle will have a settling velocity that is 73- 78% of a spherical particle. The range of settling velocities, for particle sizes according to gradation of sand, silt and clay size spheres in water at various temperatures, is shown in Table 2.

Sedimentation basin design is based upon the theory that all particles having a settling velocity greater than or equal to the design settling velocity will be removed prior to exiting the basin. Figure 1 indicates this settling velocity relation. The settling velocity of a particle that would be just removed ($V_y = V_s$) can be related to the depth of the tank and the retention time as follows:

## TABLE 2. SETTLING VELOCITIES OF SEDIMENT IN WATER[2]

| Diameter of particle | | | Classification | Terminal settling velocity | | |
|---|---|---|---|---|---|---|
| Micron | cm | mm | | @ 0°C | @ 10°C | @20°C |
| 10,000 | 1 | 10 | Gravel | 5027 cm/sec (165) ft/sec | 6874 (225) | 8975 (294) |
| 1000 | 0.1 | 1 | Coarse sand | 50. (1.65) | 68.7 (2.25) | 89.8 (2.94) |
| 1000 | 0.01 | 0.1 | Fine sand | 0.50 (0.017) | 0.69 (0.023) | 0.90 (0.029) |
| 10 | 0.001 | 0.01 | Silt | 0.005 ($1.6\times10^{-4}$) | 0.0069 ($2.3\times10^{-4}$) | 0.009 ($2.9\times10^{-4}$) |
| 1 | 0.0001 | 0.001 | Clay | $5.03\times10^{-5}$ ($1.6\times10^{-6}$) | $6.87\times10^{-5}$ ($2.3\times10^{-6}$) | $8.98\times10^{-5}$ ($2.9\times10^{-6}$) |
| 0.45 | 0.000045 | 0.00045 | Clay | $1.02\times10^{-5}$ ($3.34\times10^{-7}$) | $1.39\times10^{-5}$ ($4.57\times10^{-7}$) | $1.82\times10^{-5}$ ($5.9\times10^{-7}$) |
| 0.10 | 0.00001 | 0.0001 | Colloid | $5.03\times10^{-7}$ ($1.6\times10^{-8}$) | $6.87\times10^{-7}$ ($2.3\times10^{-8}$) | $8.98\times10^{-7}$ ($2.9\times10^{-8}$) |

| *Conditions: | Temperature, °C | 0° | 10° | 20° |
|---|---|---|---|---|
| $\mu$ = | Water viscosity, poise | 0.01787 | 0.01307 | 0.01002 |
| Pw = | Water density, $g/cm^3$ | 0.99987 | 0.99973 | 0.99823 |
| Pp = | Particle density, $g/cm^3$ | 2.65 | 2.65 | 2.65 |
| g = | Gravitational constant, $cm/sec^2$ | 981 | 981 | 981 |
| D = | Particle Diameter, cm | variable | variable | variable |

$$V_s = \frac{h}{t} \quad \frac{\text{Depth of pond at outlet zone}}{\text{Time the particle is in the pond (detention time)}}$$

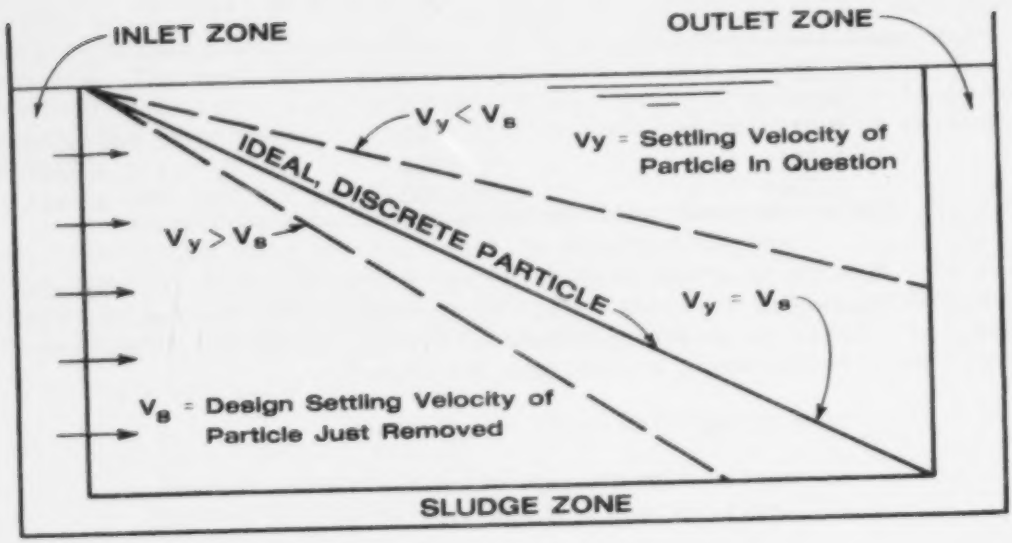


**Figure 1. Discrete particle settling.**[3]

Under constant flow - ideal conditions, the time that the particle is in the pond may be calculated as follows:

$$\text{Time} = \frac{\text{Volume of pond}}{\text{Flow rate of drainage}} = \frac{hA}{Q}$$

A = Surface area of pond
Q = Inflow to pond

By combining the two previous equations, it can now be seen that the settling velocity of a particle just removed, in a particular ideal sedimentation basin, is related to the inflow rate and basin size as follows:

$$V_s = \frac{Q}{A} = \frac{\text{Flow rate of drainage into the pond}}{\text{Surface area of pond}} = \frac{m^3/sec}{m^2} = m/sec$$

The above relationship indicates that surface area of a sediment pond ideally has a substantial effect on the removal efficiency. This effect is illustrated by the data in the following table, which shows the minimum surface area required to settle particles of selected size for a $0.0283 m^3/$ sec (1 cfs) outflow.

## TABLE 3. MINIMUM SEDIMENT POND AREA REQUIREMENTS TO SETTLE PARTICLES OF SELECTED SIZES[4]

| Particle diameter (millimeters) | Minimum area required $m^2$ | $ft^2$ |
|---|---|---|
| 0.06 | 7.43 | 80 |
| 0.04 | 13.5 | 145 |
| 0.01 | 189 | 2030 (0.046 acres) |
| 0.001 | 18,900 | 203,000 (4.6 acres) |
| 0.0001 | 1,890,000 | 20,300,000 (466 acres) |

This value of settling velocity is also known as the surface hydraulic loading or overflow rate. Hazen showed that the removal efficiency of a basin is solely dependent on hydraulic loading (ideal settling) when the following assumptions are true:[5]

1. Flow through the basin is quiescent.
2. Horizontal flow-through velocity is distributed uniformly through a cross-section of the basin.
3. Suspended particles are discrete and non-interacting.
4. Once the particles settle out, they do not become resuspended.

If the preceding conditions hold true, theoretically 100% of the particles having a settling velocity greater than or equal to the design settling velocity will be removed; however, as is the case more often than not, conditions in actual sedimentation ponds do not follow theory. Among the changes from theory occurring in many actual ponds are:

1. Short-circuiting due to currents within the pond.
2. Turbulence, due to flow-through velocity, retards settling.
3. Sludge may be scoured and resuspended at high flow-through velocities.

Short-circuiting, the flow of water directly through a pond from inlet to outlet in straight-line fashion, may have a great effect on the removal efficiency of a sedimentation basin. The short-circuiting can be caused by high inlet velocities, high outlet flow rates, location of inlets and outlets in close proximity to one another, exposure of surface area to strong winds, uneven heating of basin by sunlight, and density

differences between influent solids concentration and basin solids concentration. Inlet and outlet conditions and basin geometry are factors which cause steady short-circuiting while the other causes are intermittent. Using salt tracer studies on four types of settling tanks, short-circuiting was minimized in narrow, rectangular, horizontal-flow tanks when short-circuiting was due primarily to inlet and outlet conditions and tank geometry. The most important considerations in the attempt to minimize short-circuiting are dissipation of inlet velocity, location of inlet and outlet structures relative to one another, and the reduction of outflow velocity.

Research by Camp conducted on settling tanks of various shapes and sizes has led to a short-circuiting compensation factor ($F_{sc}$) for basin geometry that diverges from the ideal as shown in Table 4. To compensate for the non-ideality of a settling basin, the design surface area for an actual pond should be increased as follows:

$$A = \left(F_{sc} \times \frac{Q}{V_s}\right)$$

$Q$ = Flow, $m^3$ /sec
$V$ = Design Settling Velocity (m/sec)
$F_{sc}$ = Short-circuiting factor

**TABLE 4. SHORT-CIRCUITING FACTORS FOR SETTLING TANKS[6]**

| Type of tank | Short-circuiting factor (Fsc) |
|---|---|
| Radial-flow circular | 1.2 |
| Wide rectangular (length = 2.4 x width) | 1.18 |
| Narrow rectangular (length = 17 x width) | 1.11 |
| Baffled mixing chamber (length = 528 x width) | 1.01 |
| Ideal basin | 1.0 |

Turbulence in a settling basin can be minimized by designing the basin to lessen the causes of turbulence, such as inlet, outlet, wind, and density currents. The horizontal flow-through velocity of a pond causes turbulence which will affect any particles which have a settling velocity approximately equal to the overflow velocity. Figure 2 depicts the trap efficiency of a reservoir vs the ratio of settling velocity to overflow velocity for turbulent conditions.

Scouring of settled sludge material refers to the resuspension of sediment previously settled from solution by a high horizontal current velocity in the pond. Scour velocity is described as that velocity of

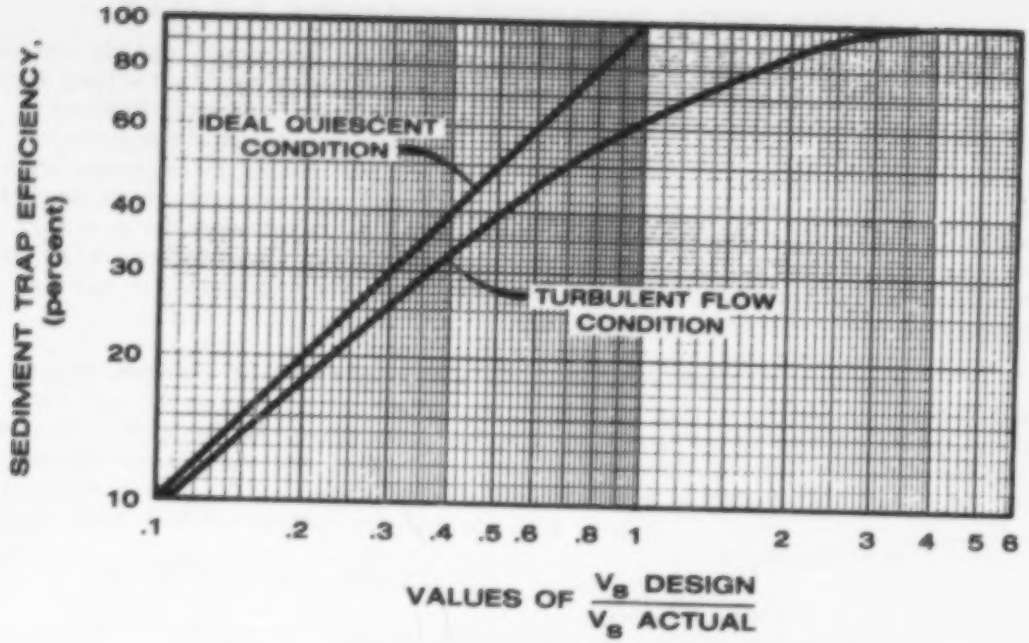


**Figure 2. Determination of trap efficiency.**[7]

flow required to start in motion a free unattached particle of a specific size. The formula to compute scour velocity is as follows:

$V_c = \sqrt{\frac{8B}{F} g(S-1)D}$;

$V_c$ = Scour velocity in cm/sec;
B = Shield's Critical Shear Stress Parameter, .04 for uniform sand, .06 for cohesive material;
g = Acceleration due to gravity, 981 cm/sec$^2$;
S = Specific gravity of particle;
D = Diameter of spherical particle (cm); and
F = Darcy-Weisbach friction factor, usually .02-.03.

In order to retain the settled particles within the basin, the horizontal velocity should be maintained at less than the scour velocity.

As detailed by the previous discussion on the theory of sedimentation, several interrelated factors have a substantial effect on the performance of a settling basin:

- Water temperature;
- Characteristics of the particle to be removed:
  - Specific gravity;
  - Diameter (size);
  - Shape;
  - Aggregation;

- Variation in flow rate of drainage into and through the pond;
- Surface area of the pond;
- Depth; and
- Non-ideal conditions in pond
  - . Short-circuiting
  - . Turbulence
  - . Scouring.

In the process of designing a settling basin, one must take care to consider all the variables having an effect on sedimentation.

## COAGULATION

When suspended particles in water approach a very small size, less than .001 mm, they are non-settleable and are described as colloidal dispersions. Colloidal dispersions consist of discrete particles that remain in suspension because of their extremely small size, chemical combination with water, or surface electrical charge. The size of the particle is an important factor in keeping the colloid in suspension because larger particles have a lower surface area to mass ratio and consequently are more affected by gravity forces causing sedimentation. With colloids, the surface area to mass ratio is high and surface forces such as electrostatic repulsion and chemical combination with water predominate over the forces of gravity. Figure 3 displays the classification of particles by size.

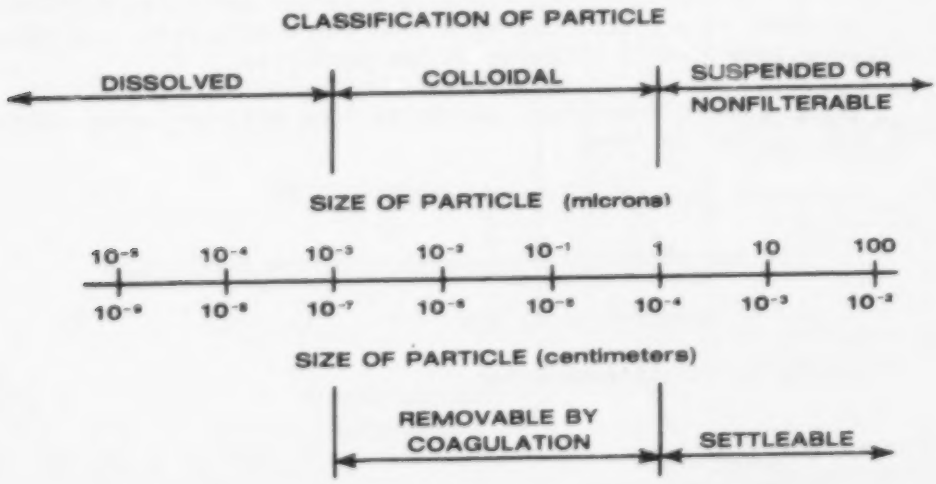


**Figure 3. Classification and size range of particles found in water.**[8]

Colloidal dispersions can be subdivided into two types, hydrophilic and hydrophobic. Hydrophilic colloids are stable in suspension due to their affinity for water, while hydrophobic colloids have no affinity for water and are stable because of their electric charge. The hydrophobic colloid becomes charged by adsorbing positive ions from the water solution. The layer of positive relatively non-exchangeable ions known as the Stern layer is attracted to the negatively charged particle. The Stern layer is then surrounded by a moveable, diffuse layer of counter ions. The concentration of positive ions in this diffuse layer decreases as the distance from the central particle increases. Figure 4 depicts the electric potential of the diffuse layer of counter ions and the Stern layer. The electric potential increases from zero at the outer edge of the counter ion layer to its maximum at the surface of the particle. The Zeta potential of the particle is the magnitude of this charge at the surface of shear between the Stern layer and the diffuse layer of counter ions and can be estimated from electrophoretic measurement of particle mobility in an electric field.

When a high zeta potential exists, a stable colloidal dispersion exists, i.e., the individual particles do not tend to aggregate because of the repulsive forces of the double layer of ions surrounding each particle. Removal of colloids from solution or destabilization of the colloidal dispersion can be accomplished by the addition of electrolytes. The electrolytes which are most effective in destabilization are multi-valent ions with an opposite charge to the colloidal particles. Oppositely charged counter ions of the electrolyte decrease the double layer colloidal charge to a point where particle contact is made and Van der Waal's forces of attraction cause the particles to aggregate. Another method of destabilization is the bridging of particles with long chain organic polyelectrolytes. The polyelectrolyte attaches to surfaces of colloidal particles causing a bridging effect, forming a larger particle. A third destabilizing agent is a hydrolyzed metal ion which acts both in compression of the double layer and in bridging of the particles.

The removal of colloidal particles from solution using coagulants depends upon several factors:

- nature and concentration of colloid;
- type and dosage of coagulant;
- use of coagulant aid; and
- characteristics of water
  - pH
  - temperature
  - ionic character.

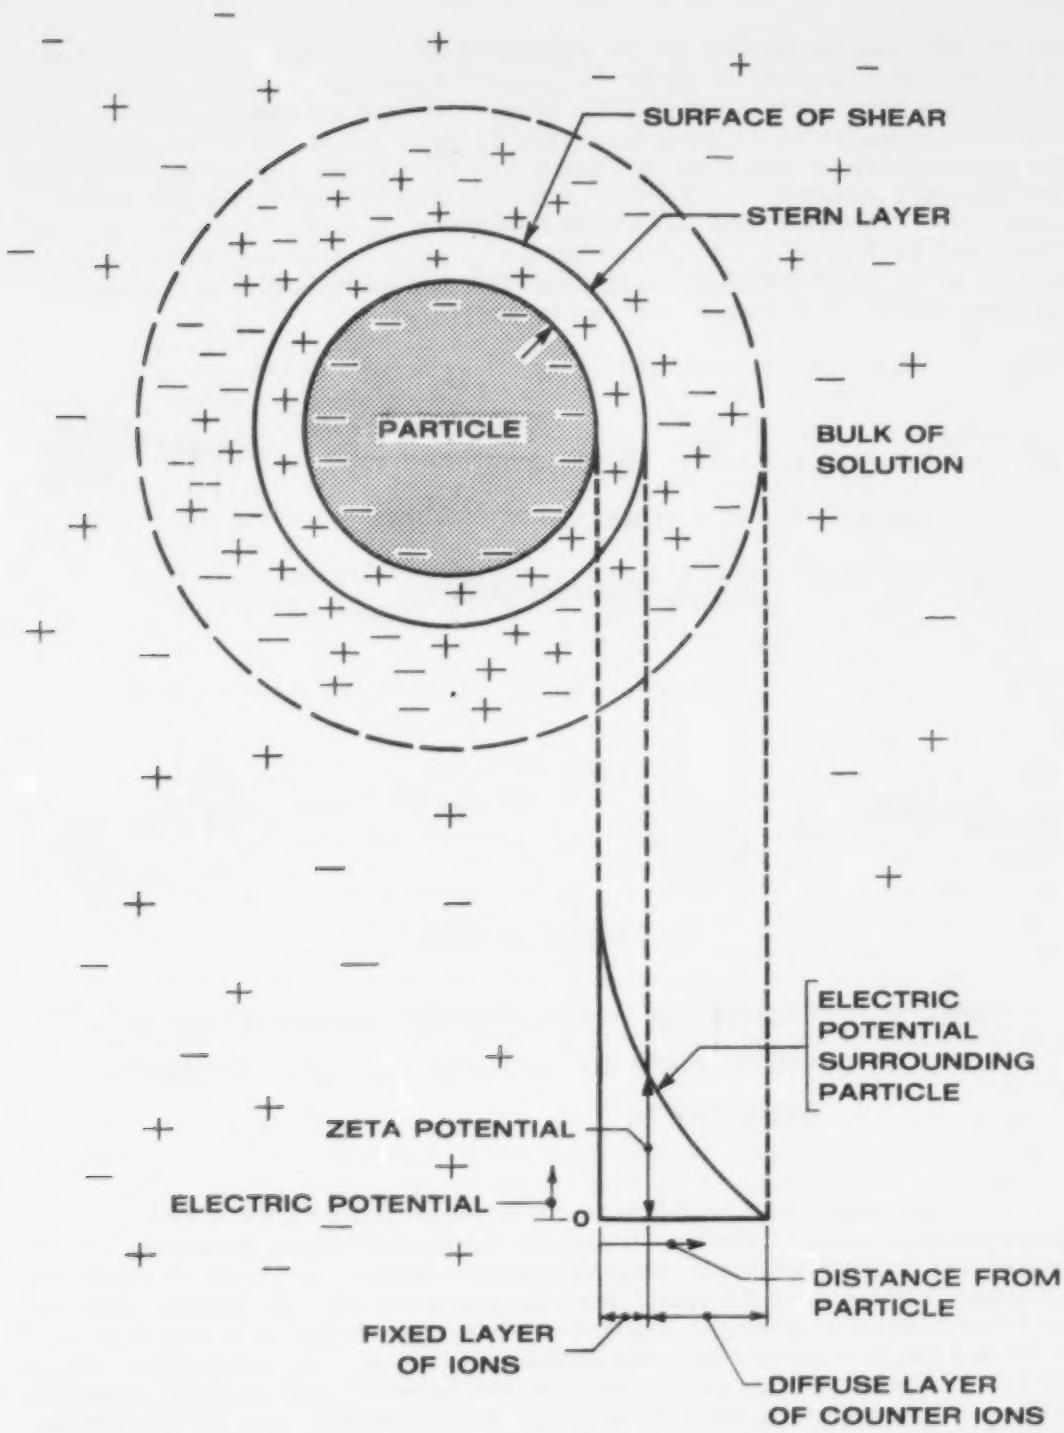


**Figure 4. Concept of zeta potential derived from the diffuse double layer theory.**[9]

Due to the complex nature of the chemistry of colloidal destabilization, the chemical treatment of water is usually based upon empirical data derived from laboratory treatability tests. In the treatment of colloids, the term coagulation is generally used to describe the complete process of colloid removal as depicted in Figure 5. This process generally includes two separate phases: 1) chemical addition and mixing during which the coagulant is added to the water and dispersed, usually by violent agitation, and 2) flocculation, occurring for a much longer period of time, during which the water is slowly mixed and the particles are allowed to agglomerate to form larger settleable particles.

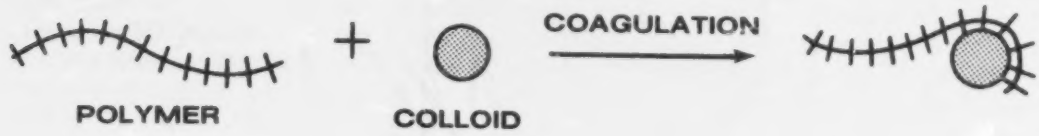


A. Destabilization

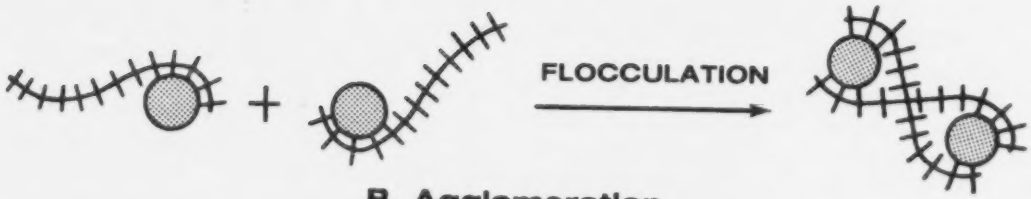


B. Agglomeration

**Figure 5. Colloidal suspension destabilization with high molecular weight organic polymers.**[10]

The removal of suspended solids by coagulation is a point of great interest due to the requirements of the 1977 Clean Water Act specifying a limit of total suspended solids permitted in the effluent of a surface mine sediment basin. Many existing basins will not be able to meet the specified effluent limitations because of the particle size distribution of the influent suspended solids. If the total amount of particles contains high percentages in the non-settleable range, then the process of coagulation must be used for their removal in order to comply with existing regulations.

# SECTION 5

# DISCUSSION OF STUDY FINDINGS

During the course of this study, the project was essentially divided into three separate phases:

- Selection and evaluation of model sediment ponds;
- Evaluation of physical modification alternatives; and
- Evaluation of the use and applicability of coagulants to improve sedimentation pond performance.

## SELECTION AND EVALUATION OF MODEL SEDIMENT PONDS

In the construction of sediment ponds, the surface mine operator has the option to choose among three basic variations of design. The first and most basic of the three is the excavated sediment pond or "dug-out" as depicted in Figure 6. An excavated sediment pond is essentially a hole in the ground which acts as a sump. The water flows into the excavated pond at one end and overflows the downstream end with no construction of detailed inlet and outlet devices. The excavated pond is easily constructed by backhoe or dozer. As is evident by the limited use of this technique, it is only applicable in certain specific situations such as the treatment of runoff from a small area or from an area with relatively flat terrain.

The second type of sediment pond is known in West Virginia as the sediment dam, excavated type. With this type of pond, an embankment is constructed in association with the excavation for additional storage capacity. The principal and emergency spillway are combined as an exit channel through the embankment as shown in Figure 7. The one specific requirement is that the minimum outflow elevation through this spillway be less than three feet above natural ground, in which case no more than three feet of water will be impounded without discharge through the outlet. This method is used widely throughout West Virginia because of it's ease of construction and limited cost.

The third method of construction also uses an embankment, but makes use of a pipe and riser barrel for a principal spillway, with an excavated emergency spillway in natural ground as seen in Figure 8. By the

**Figure 6. Excavated sediment pond.**

**Figure 7. Excavated sediment dam.**

**Figure 8. Embankment sediment pond.**

use of this method in conjunction with excavation, a much larger storage capacity can be attained. Because of the required size of many sedimentation ponds, a large number of surface mine operators use this method.

Six "model" sediment ponds were chosen as the basis of this study to represent the methods currently used for sediment removal in the Appalachian coal fields. These six ponds served as the sources of sediment-laden influent upon which bench-scale coagulant testing was performed, as will be discussed in depth later, and as examples of the various physical design characteristics used in the study area. The geographic locations of the sediment ponds are as follows: southwestern Pennsylvania, PA-1; northeastern West Virginia, WV-3; central West Virginia, WV-4; two ponds located in southwestern West Virginia, WV-1 and WV-2; and one located in southeastern Kentucky, KY-1 (see Figure 9).

## Physical Characteristics of Model Ponds

A field visit to each model sediment pond was arranged to gather data on the physical characteristics and to obtain an influent and effluent water sample during wet-weather flow conditions. The method of physical data gathering was of a reconnaissance nature and as such was rather general in scope. The physical measurements and observations made at each location were as follows:

- general description and location;
- description and measurement of inlet area;
- measurement of pond size;
- shape of pond;
- description and measurement of outlet area; and
- general condition of the pond.

Additional data was gathered from the design plans for each pond concerning items such as drainage area, disturbed area contributing to the pond, and general design computations. Throughout the next section, physical characteristics of each model pond are listed and discussed.

### Southwestern Pennsylvania PA-1--

Sediment pond PA-1 is typical of the technique used to control sediment from surface mines in Pennsylvania. In that state, most of the runoff from the affected area of a mine is directed into the pit. From the pit, it is pumped, along with active mine drainage generated within the pit, to a series of treatment ponds for neutralization and settling. Through the use of storage and preliminary settling in the pit, the operator minimizes the sediment pond storage requirements. Finally, if it is

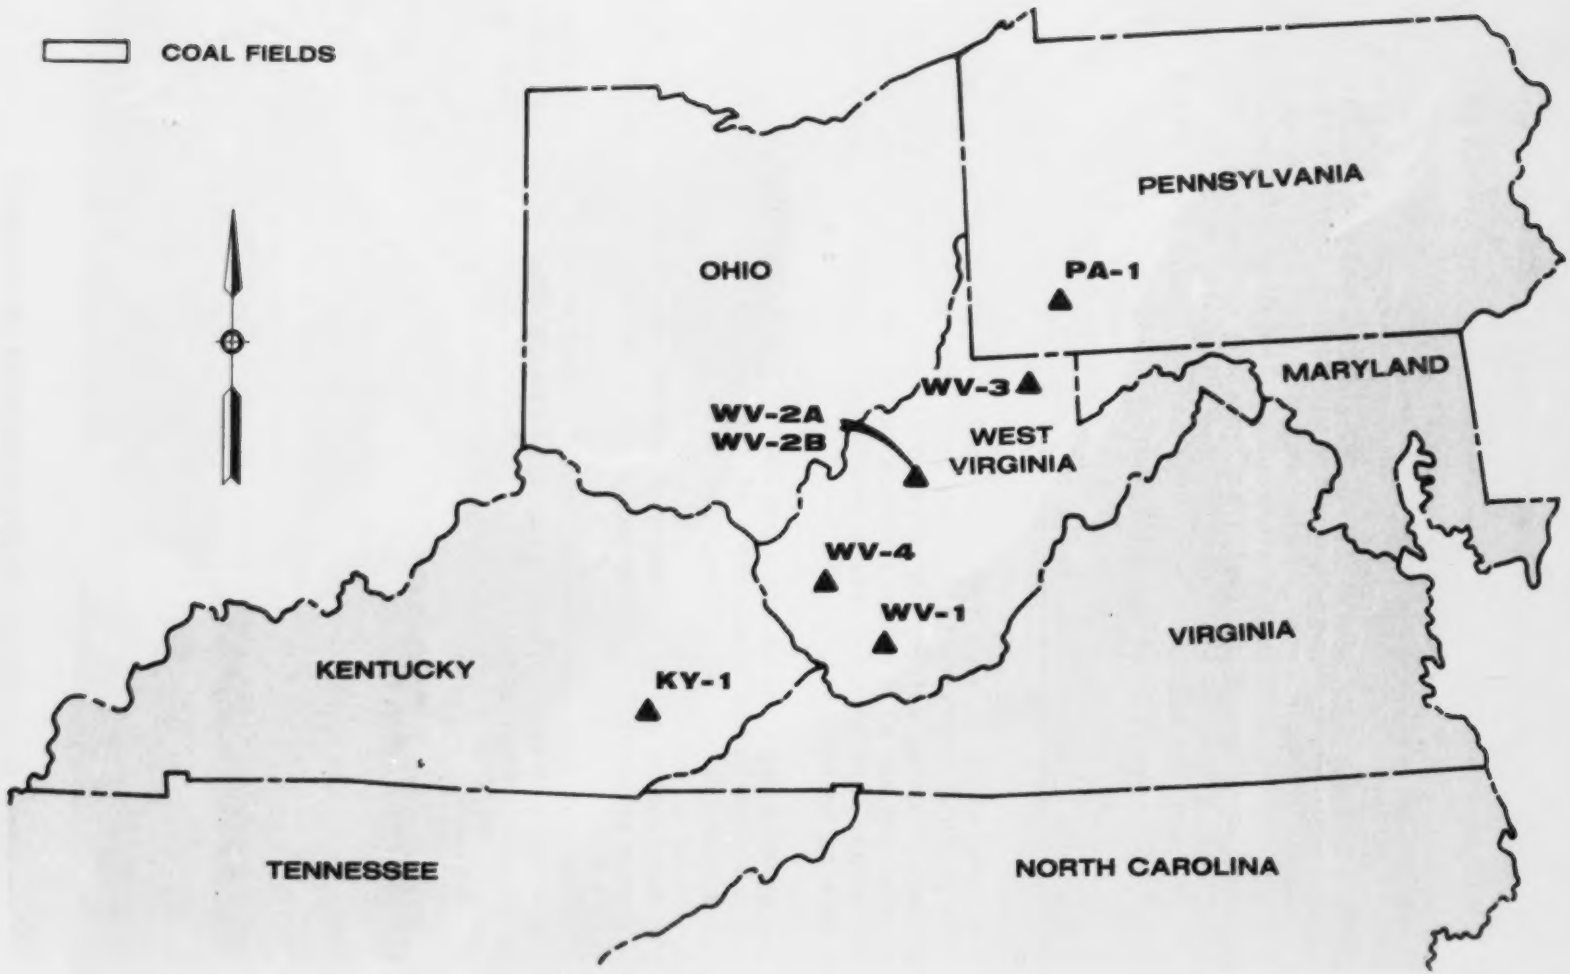


**Figure 9. Location of model sediment ponds.**

difficult to direct runoff from part of a disturbed area, such as a haul road, to the pit, a sediment pond will be constructed to treat the runoff from that small affected area. The pond is located out of a natural drainway to avoid collecting runoff from undisturbed areas, thereby lowering detention times by minimizing influent volume.

Sediment pond PA-1 is an excellent example of this type of pond. It is used to treat the runoff from a section of haul road directly above the pond. The pond is an excavated type (dugout) with a "flat lip" discharge which consists of a depressed area at one end of the pond. The pond's physical characteristics are detailed in Table 5.

Figure 10A is a photograph of sediment pond PA-1 showing the inlet area of the pond in the foreground and the body of the pond and the discharge in the background. Figure 10B is also a photograph of pond PA-1 with the inlet area in the foreground and the "flat-lip" discharge in the right background.

Southwestern West Virginia WV-1--

Sediment pond WV-1 is located in the southwestern section of West Virginia and is typical of the type of pond used in steep-sloped mining areas. These ponds are located directly in the major drainage system downstream of the mine site. The pond is constructed through a combination of excavation and embankment techniques. Use of this combination construction technique increases the storage capacity of the excavated pond. The additional storage is limited by West Virginia regulations to three feet above the original ground surface unless a principal pipe spillway and emergency spillway is included in the design. The spillway is generally a trapezoidal channel in the embankment with an invert elevation of three feet above the natural ground.

The volume of the West Virginia sediment pond is based upon the requirement of a 0.125 acre-foot per acre of disturbed area above the pond. This disturbed area in most cases consists of the face area of a valley fill since on-bench sediment control and valley fill construction techniques are practiced to limit the amount of sediment reaching the pond. Sediment pond WV-1's specific physical characteristics are listed in Table 6.

Figures 11A through 11C are photographs of the pond taken during the sampling period. Figure 11A is a photograph of the body of the pond taken from the embankment - note the swamp-like vegetation at the crest of the embankment. Figure 11B shows the entrance to the exit channel with vegetation growing in the body of the pond, and Figure 11C is a photograph of the concrete-lined exit channel.

## TABLE 5. PHYSICAL CHARACTERISTICS-SEDIMENT POND PA-1

| Physical characteristics | Description |
|---|---|
| Type | - Excavated Pond (dugout) |
| Location | - Off Main Drainage |
| Drainage Area | - Less than 12.1 hectares (30 acres) |
| Disturbed Area | - Less than 12.1 hectares (30 acres) |
| Inlet Configuration | - Random Inlet<br>- No Defined Channel<br>- No Erosion Control |
| Body of Pond | - Rectangular 35m x 23.6m (90 ft x 60 ft)<br>- Depth 1.5m (5 ft)<br>Verticle Side Slopes |
| Storage Volume | - 764.6$m^3$ (27,000 $ft^3$)<br>(0.62 Acre-Ft) |
| Length : Width | - 1.5:1 |
| Outlet Configuration | - "Flat-Lip" Discharge<br>Depressed Swale at End of Pond<br>Width = 5.2m (17 ft)<br>Heavily Grassed, Clay, Swampy Material |
| General Condition of Pond | - No erosion control on inlet<br>No erosion control on outlet<br>Good general condition<br>Appeared to be recently constructed |

A. Main body of pond.

B. View of inlet area.

**Figure 10. Sediment pond PA-1.**

## TABLE 6. PHYSICAL CHARACTERISTICS-SEDIMENT POND WV-1

| Physical characteristics | Description |
|---|---|
| Type | - Excavated Sediment Dam |
| Location | - On Main Drainage System |
| Drainage Area (Stream Watershed) | - 137.6 ha (340 Acres) |
| Disturbed Area | - 15.9 ha (64 Acres) |
| Inlet Configuration | - Trapezoid<br>Concrete Lined<br>4.6m (15 ft) Bottom Width<br>6.7m (22 ft) Top Width<br>20% Slope |
| Body of Pond | - Pear Shaped<br>82.3m (270 ft) Long By<br>53.3m (175 ft) Wide at Embankment<br>Approx. 1.5m (5 ft) Deep |
| Storage Volume | - 3330.8$m^3$ (2.7 AF) |
| Length : Width | - 1.5:1 |
| Outlet Configuration | - Trapezoid<br>Concrete Lined<br>4.6m (15 ft) Bottom Width<br>8.2m (27 ft) Top Width<br>20% Slope |
| General Condition of Pond | - At time of sampling, pond was choked with sediment. Vegetation had grown throughout 25% of the surface area. |

A. View from embankment.

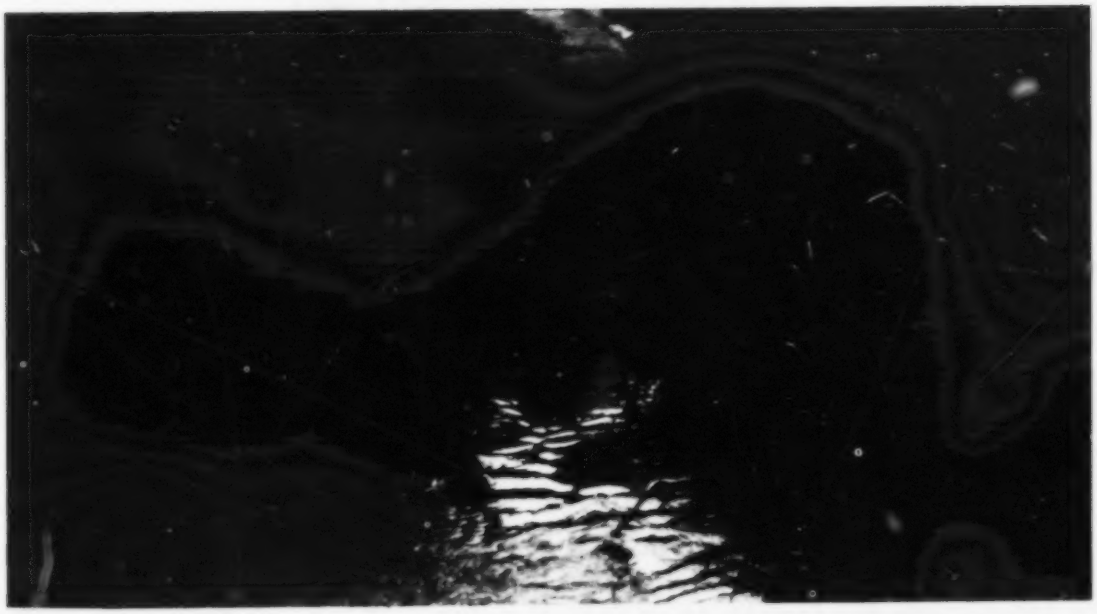

B. Top of exit channel.

**Figure 11. Sediment pond WV-1.**

C. Exit channel.

**Figure 11. (continued)**

Central West Virginia WV-2--

Sediment pond WV-2 is a combination of two ponds in a series, WV-2A and WV-2B. The first pond in the series is an excavated pond with an embankment similar to sediment pond WV-1. It is located in the natural stream channel and all drainage from the upstream area passes through the pond. Data on the pond's physical characteristics are listed in Table 7.

Figures 12A through 12C are photographs of pond WV-2A taken during a field visit to the mine site. The first figure indicates the inlet area to the pond where a delta of sediment has formed because of low influent velocity. Figure 12B shows the body of the pond and Figure 12C indicates the embankment with rock lined exit channel.

The second pond in this series is an excavated one approximately one kilometer downsteam from the first pond. It is located in an unusual position at the confluence of the original stream through the mine site and another drainage area. The pond is approximately rectangular in shape, 115.8m (380 ft) long by 45.7m (150 ft) wide. It has two rock lined trapezoidal entrance channels and a rock lined trapezoidal exit channel. Physical data for the pond are detailed in Table 8.

## TABLE 7. PHYSICAL CHARACTERISTICS- SEDIMENT POND WV-2A

| Physical characteristics | Description |
|---|---|
| Type | - Excavated Sediment Dam |
| Location | - On Main Drainage System |
| Drainage Area | - 174.4 ha (431 Acres) |
| Disturbed Area | - 18.6 ha (46 Acres) |
| Inlet Configuration | - Culvert Under Haul Road |
| Body of Pond | - Trapezoidal 109.7m (360 ft) Long<br>48.8m (160 ft) Wide at Dam<br>18.2m (60 ft) Wide at Upstream End |
| Storage Volume | - 5550 $m^3$ (4.5 AF) |
| Length : Width | - 3.3:1 |
| Outlet Configuration | - Dumped Rock in Original Channel |
| General Condition of Pond | - Good<br>Sediment accumulation at inlet |

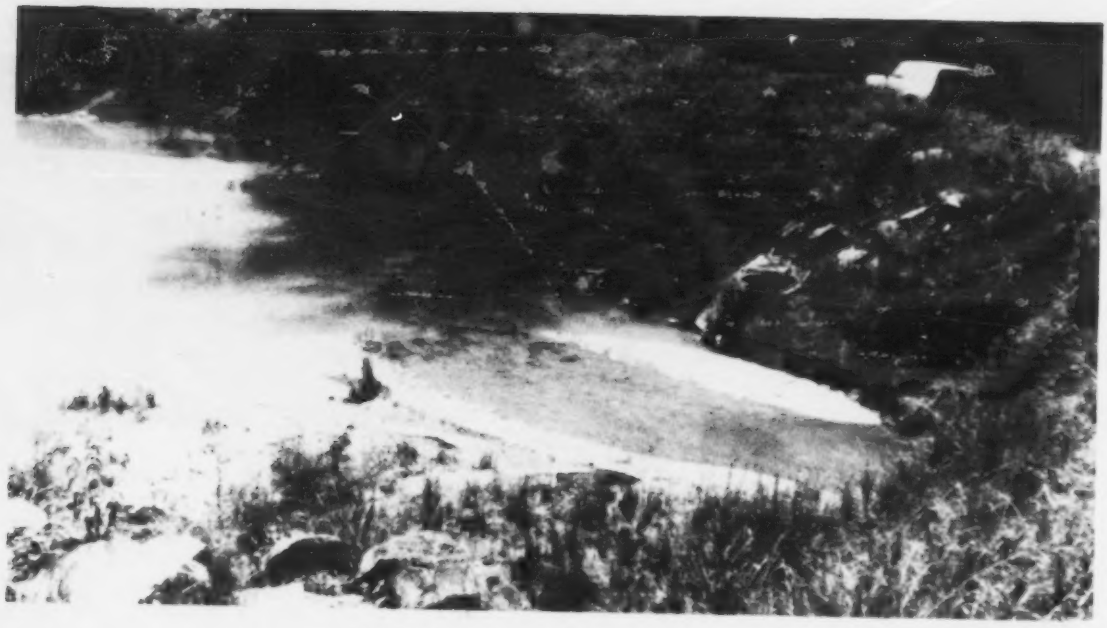

A. View of inlet area.

B. View of body of the pond.

**Figure 12. Sediment pond WV-2A**

**C. View of outlet.**

**Figure 12. (continued)**

The photographs shown in Figures 13A through 13D were taken at sediment pond WV-2B. Figure 13A was taken at the inlet end and shows the use of multiple rock lined entrance channels for erosion preotection and velocity reduction. Figure 13B is a view of the body of the pond looking from the inlet area, Figure 13C is a view looking from the outlet, and Figure 13D is a photograph of the rock lined effluent channel. Having no embankment, and being totally excavated, sediment pond WV-2B is an unusual pond for Appalachian terrain. The material excavated during pond construction was used to reclaim a low lying area adjacent to the pond for farming purposes.

Northeastern West Virginia WV-3--

Sediment pond WV-3 is an experimental pond designed, constructed, and operated by the Environmental Protection Agency near Morgantown, West Virginia. It is an embankment pond with a pipe principal spillway and emergency spillway. Two modifications have been made to the pond in an attempt to improve its removal efficiency. A weir trough has been added to the riser barrel to decrease the effluent velocity, limit short circuiting, and decrease weir loading. A baffle has been added near the pond entrance to decrease influent velocity, aid in settling, and decrease short circuiting. Specific pond physical data are listed in Table 9.

## TABLE 8. PHYSICAL CHARACTERISTICS- SEDIMENT POND WV-2B

| Physical characteristics | Description |
|---|---|
| Type | - Excavated Sediment Pond |
| Location | - On Main Drainage System |
| Drainage Area | - 562.9 ha (1391 Acres) |
| Disturbed Area | - 43.7 ha (108 Acres) |
| Inlet Configuration | - Two Rock Lined Inlet Channels |
| Body of Pond | - Rectangular 115.8m x 42.7m (380 ft x 140 ft) |
| Storage Volume | - 7524 $m^3$ (6.1 Acre-Ft) |
| Length : Width | - 2.7:1 |
| Outlet Configuration | - Trapezoidal<br>Rock Lined<br>11.9m (39 ft) Wide at Top<br>1.5m (5 ft) Deep |
| General Condition of Pond | - Very Good<br>Erosion control on inlet and outlet<br>Large surface area |

Figure 14A and 14B are photographs of sediment pond WV-3. Figure 14A is a view toward the inlet from the embankment and shows the weir trough and riser barrel discharge device. Figure 14B is a closeup of the weir trough and riser barrel.

Central West Virginia WV-4--

Sediment pond WV-4 is a prime example of a pond designed solely to provide a specific amount of sediment volume without regard to detention time. WV-4 is located downstream from most of this site's mining activity and is designed to provide sediment control for a portion of the mine haul

A. View of multiple inlets.

B. View from inlet.

**Figure 13. Sediment pond WV-2B.**

C. View from effluent channel.

D. Effluent channel.

**Figure 13. (continued)**

## TABLE 9. PHYSICAL CHARACTERISTICS-SEDIMENT POND WV-3

| Physical characteristics | Description |
|---|---|
| Type | - Embankment Sediment Pond |
| Location | - On Main Drainage System |
| Drainage Area | - 55.1 ha (136 Acres) |
| Disturbed Area | - 25.9 ha (64 Acres) |
| Inlet Configuration | - Natural Meandering Stream Channel |
| Body of Pond | - Rectangular 111.2m x 39.6m (365 ft x 130 ft) Baffle Located 8.5m (28 ft) from Entrance |
| Storage Volume | - 5674 $m^3$ (4.6 AF) |
| Length : Width | - 2.8:1 |
| Outlet Configuration | - Riser 91.4 m (36 in) Smooth Steel Pipe, No Perforations |
| | - 0.3m x 0.3m (1 ft x 1 ft) Wooden Broad Crested Weir Trough 30.5m (100 ft) Long Leading to Riser Barrel |
| | - Principal Spillway - 61.0 cm (24 in) Smooth Steel Pipe @ 0.66% Slope |
| | - 10.2 cm (4 in) Smooth Steel Drainpipe |
| | - Trapezoidal Emergency Spillway 20.7m (68 ft) Bottom Width 0.9m (3 ft) Deep |
| General Condition of Pond | - Pond area between entrance and baffle has accumulated sediment to top of baffle. |

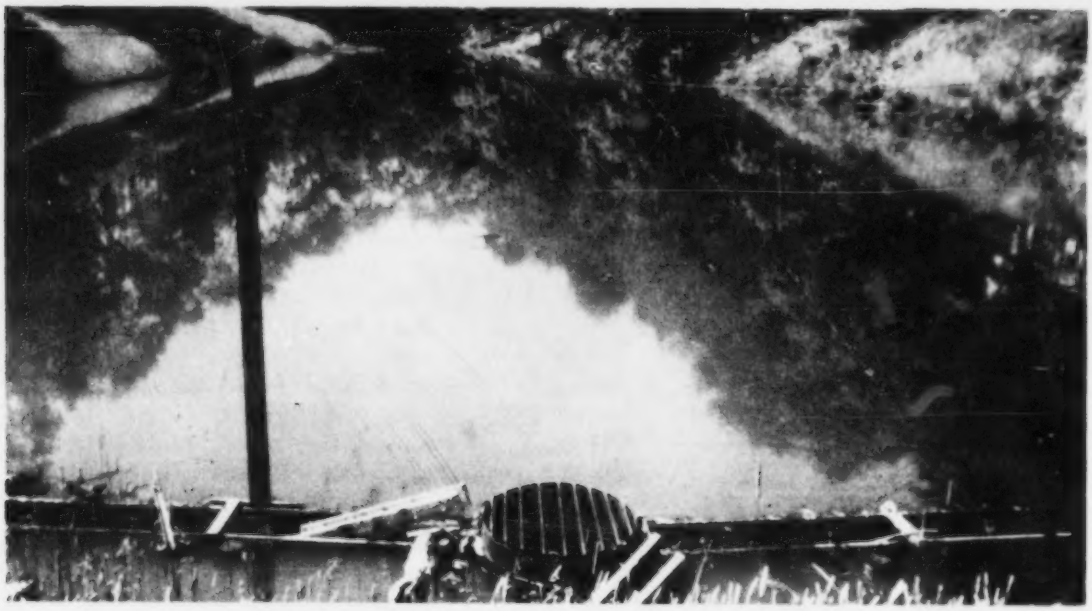

A. View from embankment.

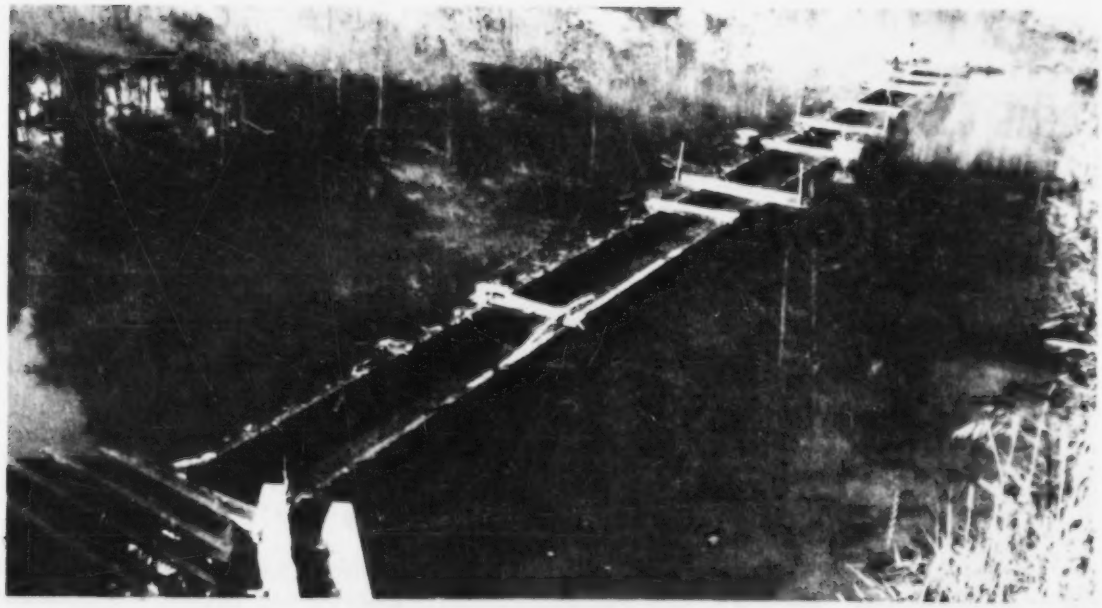

B. Effluent weir trough.

**Figure 14. Sediment pond WV-3.**

## TABLE 10. PHYSICAL CHARACTERISTICS-SEDIMENT POND WV-4

| Physical characteristics | Description |
|---|---|
| Type | - Excavated Sediment Dam |
| Location | - On Main Drainage System |
| Drainage Area | - 151 ha (375 Acres) |
| Disturbed Area | - 5.3 ha (13.2 Acres) |
| Inlet Configuration | - Natural Stream Channel 1.2m (4 ft) - 3.1m (10 ft) Wide |
| Body of Pond | - Rectangular 64.0m x 14.6m (210 ft x 48 ft) |
| Storage Volume | - 2400$m^3$ (1.9 Ac-ft) |
| Length : Width | - 4.4:1 |
| Outlet Configuration | - Concrete Spillway 2.4m (8 ft) - 3.6m (12 ft) Wide |
| General Condition of Pond | - Accumulated sediment should be removed<br>Poor erosion control at inlet |

road. It receives drainage, however, from the total area above the pond, thereby severely limiting detention time. The pond is an excavated embankment type rectangular in shape. Specific physical details are listed in Table 10.

Figures 15A and 15B are photographs of sediment pond WV-4. Figure 15A is a photograph of the body of the pond with the embankment and spillway in the upper right background. Figure 15B is also a photograph of the body of the pond but showing the inlet area in the left foreground.

Southeastern Kentucky KY-1--

Sediment pond KY-1 is located in the southeastern section of Kentucky and is an example of a pond design based upon the requirements of the Office of Surface Mining of the U.S. Department of the Interior in effect at the time of design. The pond has a sediment storage volume equivalent to 0.2 acre-feet per acre of disturbed area and runoff storage equivalent

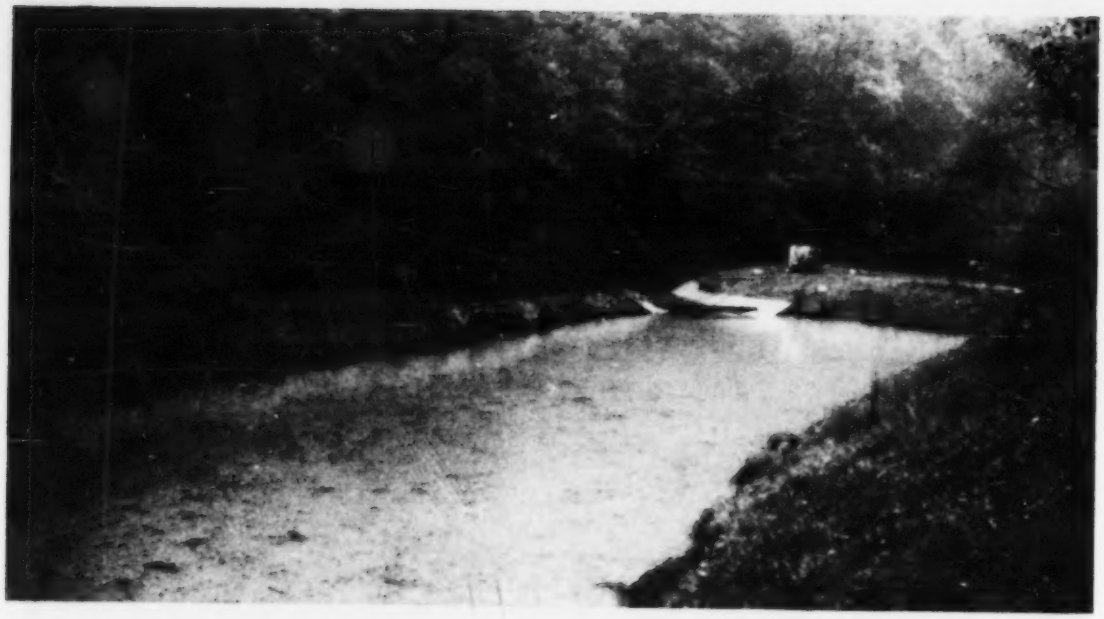

A. View of embankment and spillway.

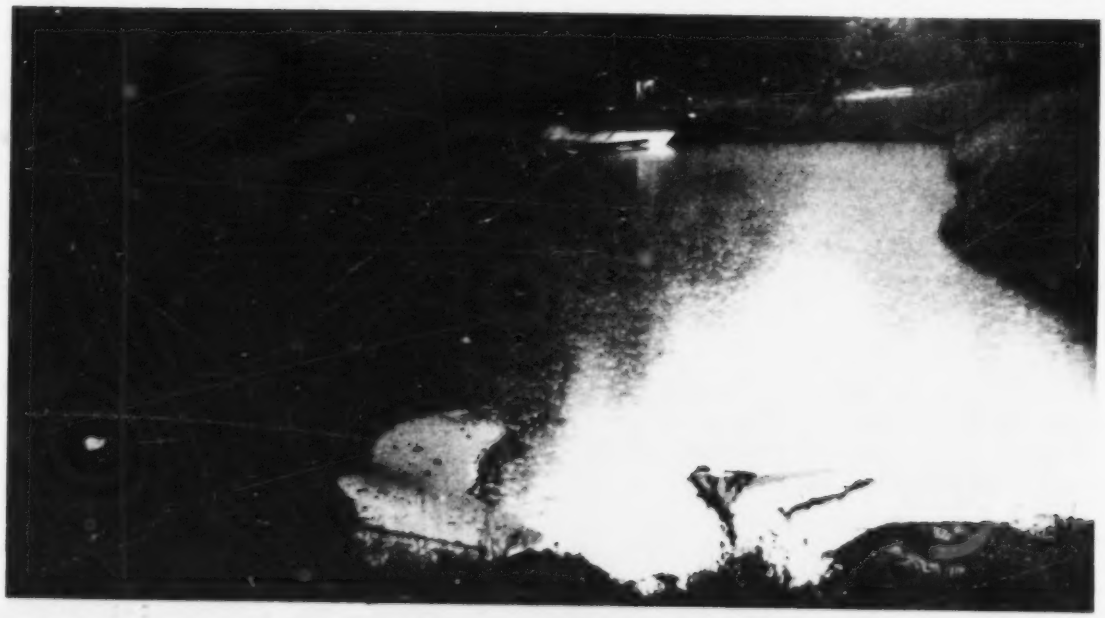

B. Inlet area of pond.

**Figure 15. Sediment pond WV-4.**

to the runoff from a 10-year 24-hour storm. It is an excavated pond with an embankment, having a principal spillway of a pipe with riser barrel in association with an excavated emergency spillway. The pond is situated directly downstream from the tow of a valley fill and treats the runoff from the fill and the mine bench above it. The physical details of the pond are listed in Table 11.

Two photographs of sediment pond KY-1 are displayed in Figures 16A and 16B. Figure 16A is a view of the pond body taken from the embankment showing the inlet area in the background and the riser barrel with anti-vortex device in the foreground. Figure 16B is a view taken from the inlet area showing the embankment, riser barrel, and emergency spillway in the background.

## Evaluation of Model Pond Efficiency

The second phase in the evaluation of the model ponds was the determination of their performance under the conditions observed during the sampling period and their theoretical performance during three rare storm events. The theoretical performance criteria was chosen because of the current regulations regarding the effluent limitations from surface mine sedimentation ponds. The effluent limitations are applicable for sediment ponds during storm events up to and including the 10-year, 24-hour storm.

In order to determine sediment pond performance, certain laboratory tests must be performed on the influent and effluent water samples:

1. General chemical parameters
2. Total suspended solids
3. Particle size distribution

With the data from these tests and the physical characteristics of each pond, the efficiency of each model pond was determined.

### Laboratory Testing Results--

During the period August - November 1978, grab water samples were obtained from the influent and effluent of the six model sediment ponds and were analyzed for the following chemical parameters:

- pH
- Total alkalinity (mg/l as Ca $CO_3$)
- Hot acidity (mg/l as Ca $CO_3$)
- Turbidity (JTU)
- $SO_4$ (mg/l)
- Ca (mg/l)

## TABLE 11. PHYSICAL CHARACTERISTICS-SEDIMENT POND KY-1

| Physical characteristics | Description |
|---|---|
| Type | - Excavated Embankment Sediment pond |
| Location | - On Main Drainage System |
| Drainage Area | - 18.2 ha (45 Acres) |
| Disturbed Area | - 4.6 ha (15 Acres) |
| Inlet Configuration | - Natural Stream Channel |
| Body of Pond | - Pear Shaped<br>21.3m (70 ft) at Dam x<br>24.4m (80 ft) Long |
| Design Storage Volume | - 7067 $m^3$(5.73 Ac-ft) |
| Sediment Storage | - 3823 $m^3$(3.1 Ac-ft) |
| Runoff Storage | - 1233 $m^3$(2.63 Ac-ft) |
| Length : Width | - 2.1:1 |
| Outlet Configuration | - Principal Spillway<br>38.1 cm (15 in) Corrugated Metal Pipe with<br>53.3 cm (21 in) Corrugated Metal Pipe Riser<br>- Trapezoidal Emergency Spillway<br>6.1 m (20 ft) Bottom Width<br>0.76 m (2.5 ft) Depth |
| General Condition of Pond | - Recently Constructed<br>No energy dissipation on inlet<br>No erosion protection on emergency spillway |

A. View of body of the pond.

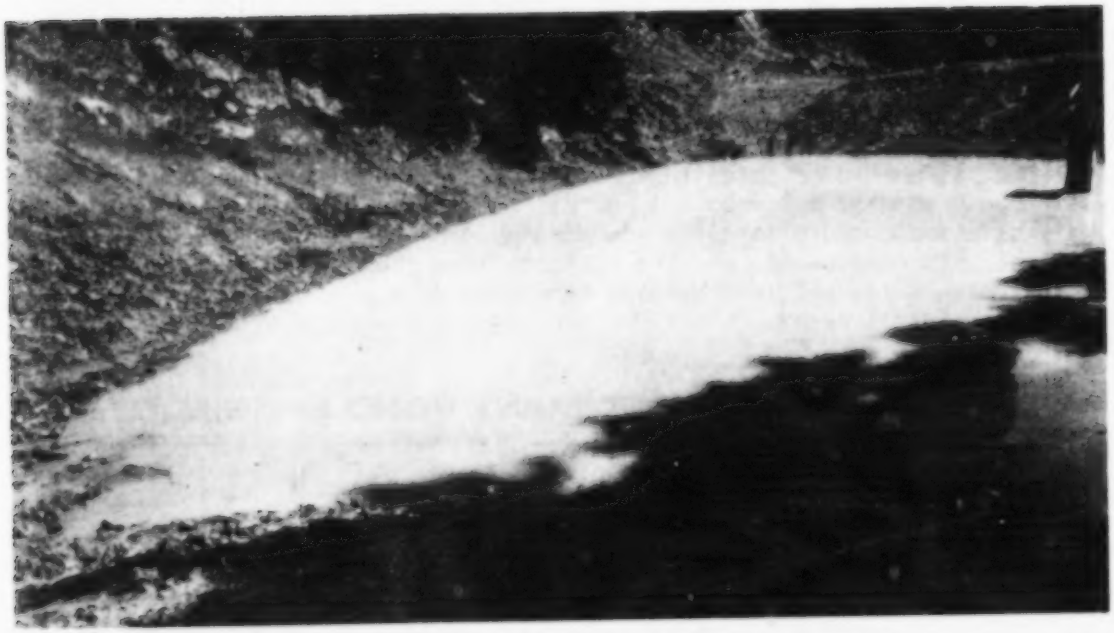

B. View of embankment, riser barrel and emergency spillway.

**Figure 16. Sediment pond KY-1.**

- Mg (mg/1)
- Total solids (mg/1)
- Total suspended solids (mg/1)
- Settleable solids (mg/1)
- Total Fe (mg/1)
- Mn (mg/1)

The results of the chemical analyses are shown in Table 13.

Additional testing performed on the water samples included a particle size distribution analysis on the influent which are depicted in Figures 17 thru 23. The particle size distribution analysis was performed by first filtering the sample through a 45 micron filter to remove the larger particles. After filtering, the filtrate was processed with a Coulter Counter to measure the specific particle sizes.

Efficiency of Removal During Sampling Period--

As previously mentioned, the water samples were taken during or directly after storm events in the drainage area of each pond. Table 12 shows the amount of rainfall associated with the precipitation events occurring or preceding the sample period, the influent and effluent suspended solids, and the percent removal of suspended solids by each sediment pond.

One must be cautioned when trying to draw conclusions from the percent removals of the pond tabulated below. Due to the nature of the sampling programs, grab samples vs continuous monitoring, a definite percent removal cannot be determined with confidence; rather, only a preliminary indication of removal efficiency can be obtained from this data.

It should be noted that rainfall data was derived, not from on-site measurements, but from the nearest meteorological station. Thus rainfall data shown could be quite inaccurate, depending on local weather conditions, storm movement, and the distance from the measuring point to the actual mine site, and is presented here only as a general indication of the type of rainfall event.

## TABLE 12. MODEL SEDIMENT POND EFFICIENCY

| Pond | Date | Rainfall (cm) | Rainfall (in) | Suspended Solids (mg/l) Influent | Suspended Solids (mg/l) Effluent | Removal % |
|---|---|---|---|---|---|---|
| PA-1 | 8/29/78 | 3.25 | 1.28 | 437 | 22 | 95 |
| WV-1 | 8/15/78 | 0.43 | 0.17 | 2300 | 21 | 99 |
| WV-2A | 10/13/78 | 1.27 | 0.5 | 148 | 6 | 96 |
| WV-2B | 10/13/78 | 1.27 | 0.5 | 8,(31) | 47 | -- |
| WV-3 | 11/27/78 | 1.17 | 0.44 | 4510 | 45 | 99 |
| WV-4 | 10/26/78 | 2.41 | 0.95 | 2454 | 39 | 98 |
| KY-1 | 11/16/78 | 1.65 | 0.65 | 606 | 183 | 70 |

## TABLE 13. WATER QUALITY OF MODEL SEDIMENT PONDS

| | Model sediment ponds | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | PA-1 (Inf) | PA-1 (Eff) | WV-1 (Inf) | WV-1 (Eff) | WV-2A (Inf) | WV-2A (Eff) | WV-2BL (Inf) | WV-2BR (Inf) | WV-2B (Eff) | WV-3 (Inf) | WV-3 (Eff) | WV-4 (Inf) | WV-4 (Eff) | KY-1 (Inf) | KY-1 (Eff) |
| pH | 5.8 | 5.2 | 8.1 | 8.3 | 5.6 | 6.1 | 6.0 | 6.3 | 5.7 | 7.4 | 7.5 | 6.4 | 6.7 | 7.0 | 7.0 |
| Total alkalinity (mg/l as $CaCO_3$) | 18 | 14 | 176 | 178 | 14 | 20 | 16 | 124 | 10 | 138 | 152 | 36 | 30 | 82 | 52 |
| Hot acidity (mg/l as $CaCO_3$) | +12 | +4 | -168 | -158 | -4 | -10 | -6 | -130 | -2 | -116 | -136 | +30 | -12 | -58 | -32 |
| Turbidity (JTU) | 880 | 34 | 440 | 22 | 64 | 4.9 | 12 | 26 | 20 | 200 | 42 | 440 | 38 | 680 | 92 |
| $SO_4$ (mg/l) | 215 | 195 | 290 | 260 | 39 | 41 | 27 | 39 | 7.8 | 180 | 150 | 110 | 77 | 79 | 72 |
| Ca (mg/l) | 45 | 47 | 93.2 | 90.3 | 11.4 | 17.5 | 9.7 | 10.8 | 3.5 | 90 | 71 | 27 | 27 | 35 | 25 |
| Mg (mg/l) | 26 | 19.4 | 58 | 57 | 6.3 | 5.5 | 4.7 | 5.4 | 1.6 | 31.6 | 23.7 | 18.0 | 16.5 | 21.7 | 15.2 |
| Total solids (mg/l) | 1,413 | 433 | 3,447 | 817 | 253 | 106 | 93 | 128 | 108 | 4,975 | 423 | 3,089 | 380 | 996 | 376 |
| Total suspended solids (mg/l) | 437 | 22 | 2,306 | 21 | 148 | 6 | 8 | 31 | 47 | 4,510 | 45 | 2,454 | 39 | 606 | 183 |
| Settleable solids (ml/l) | 5.0 | 0.1 | 24 | 0.3 | 2.5 | 2.1 | 0.1 | 0.3 | 0.8 | 40 | <0.1 | 8.0 | 0.2 | 3.5 | 0.2 |
| Total Fe (mg/l) | 8.5 | 0.17 | 15.6 | 0.26 | 5.00 | 0.45 | 1.70 | 1.76 | 1.13 | 34.3 | 0.46 | 13.5 | 0.69 | 4.04 | 1.39 |
| Mn (mg/l) | 2.10 | 3.3 | 0.97 | 0.18 | 0.56 | 0.26 | 0.33 | 0.21 | 0.11 | 2.25 | 0.53 | 4.2 | 2.9 | 2.49 | 0.31 |

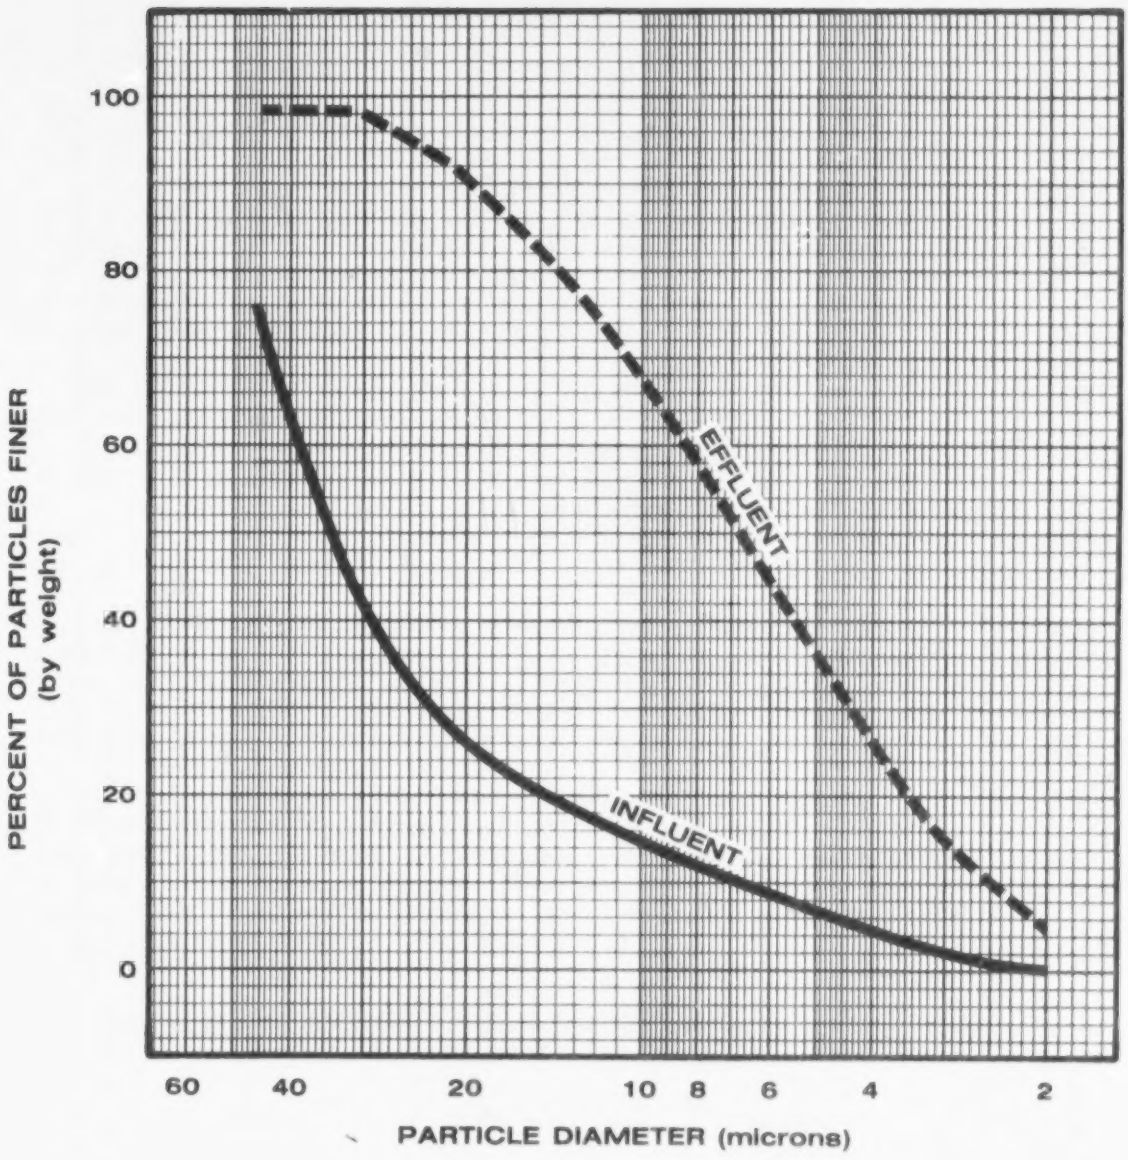


**Figure 17. Particle size distribution PA-1.**

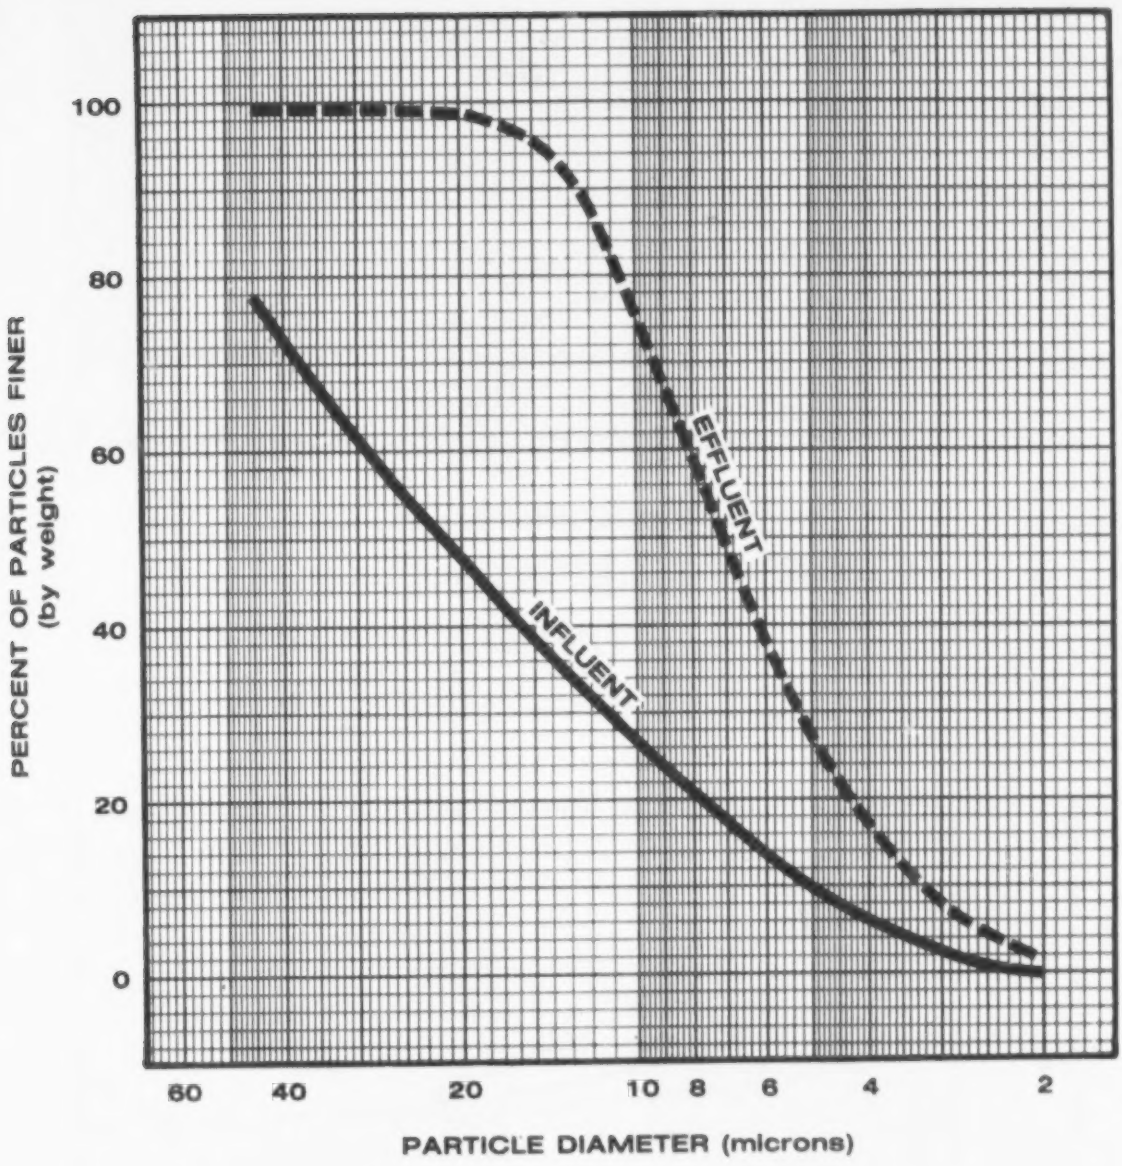


**Figure 18. Particle size distribution WV-1.**

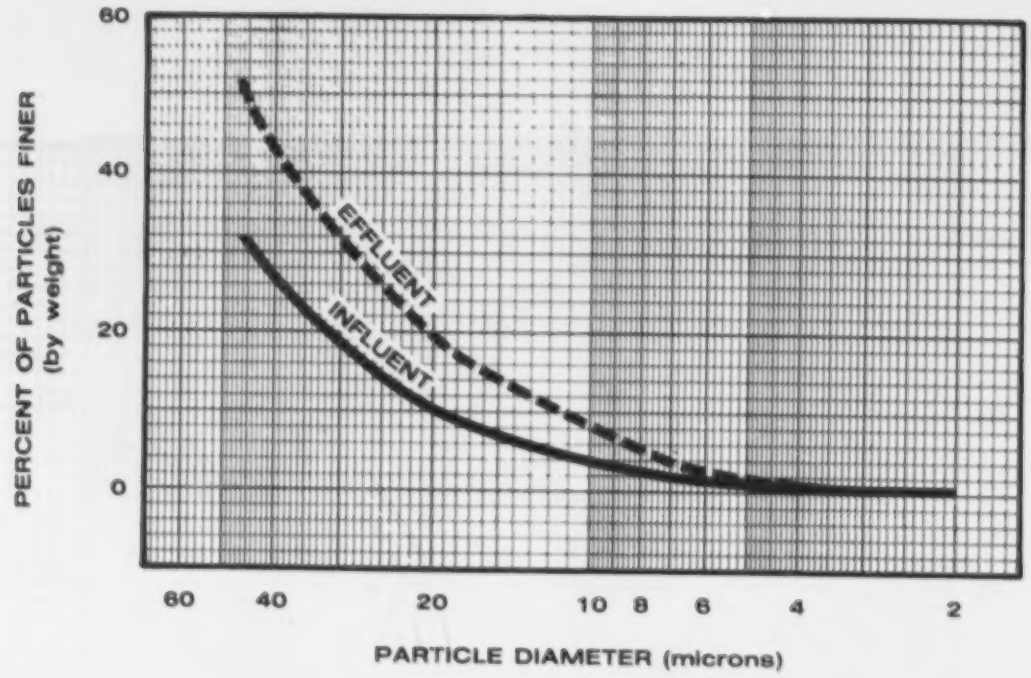


Figure 19. Particle size distribution WV-2A.

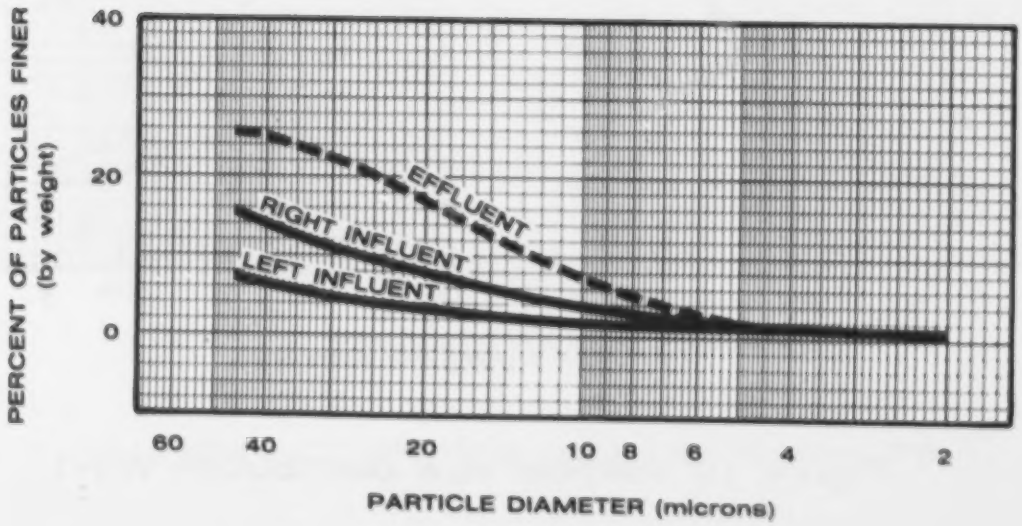


Figure 20. Particle size distribution WV-2B.

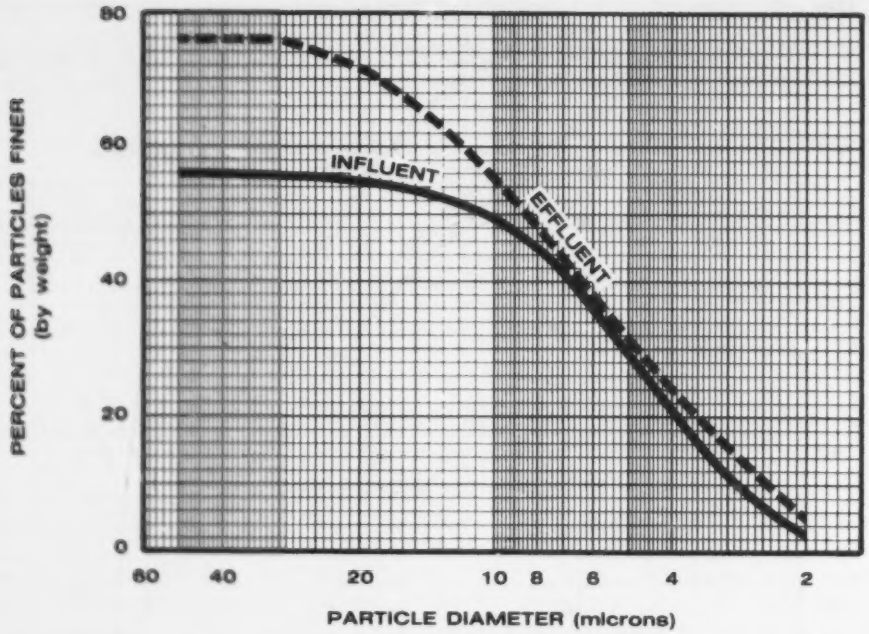


Figure 21. Particle size distribution WV-3.

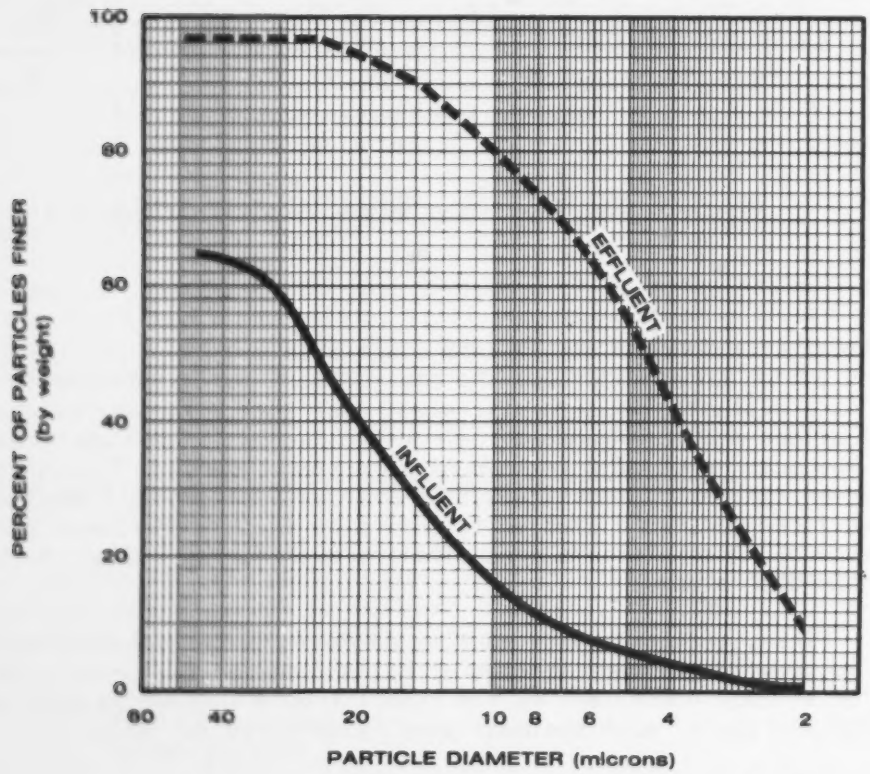


Figure 22. Particle size distribution WV-4.

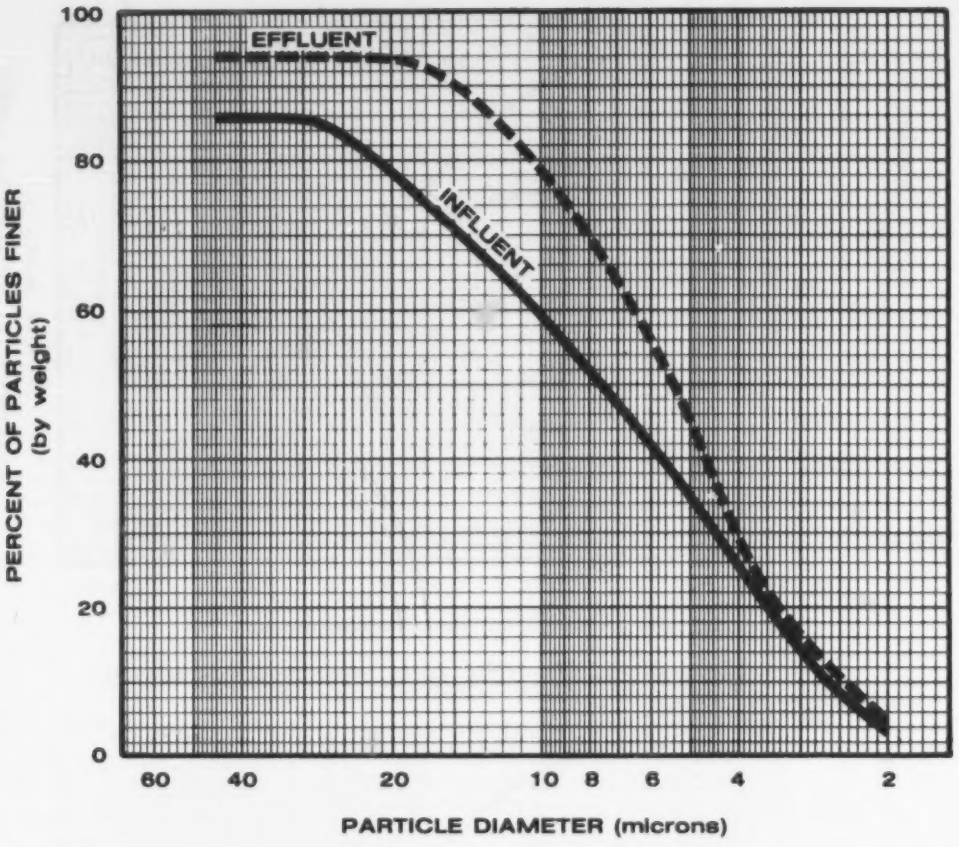


**Figure 23. Particle size distribution KY-1.**

Theoretical Efficiency During a Rare Storm Event--

During a recent study, the six sediment ponds referred to in this report were evaluated to determine size requirements to meet current OSM specifications and to determine their effectiveness in sediment removal during the occurrence of a variety of rare storm events. Through the use of computer simulation techniques, the six sediment ponds, redesigned to OSM specifications, were studied to determine their performance during the experience of three discrete precipitation events, the 2-year, 5-year, and 10-year 24-hour storms.

First, sediment ponds meeting current OSM requirements were designed to provide sediment storage of 0.1 AF/acre of disturbed area and a detention storage equivalent to the runoff from a 10-year 24-hour storm. The total storage of each sediment pond is detailed in Table 14.

## TABLE 14. SEDIMENT POND STORAGE CAPACITY

| | Current storage volume | | OSM design volume | | Increase in size |
|---|---|---|---|---|---|
| | ($m^3$) | (AF) | ($m^3$) | (AF) | % |
| PA-1 | 764 | 0.62 | 10,120 | 8.2 | 1220 |
| WV-1 | 3330 | 2.7 | 34,500 | 28.0 | 937 |
| WV-2A | 5550 | 4.5 | 35,200 | 28.5 | 533 |
| WV-3 | 5674 | 4.6 | 23,900 | 19.4 | 322 |
| WV-4 | 2400 | 1.9 | 24,700 | 20.0 | 952 |
| KY-1 | 7067 | 5.7 | 6,400 | 5.2 | -8.8 |

In order to evaluate the performance of these sediment ponds, a three-step approach was employed. First, the gross erosion in tons from the watershed tributary to the ponds was computed for the 2-year, 5-year, and 10-year 24-hour storm events. Second, the inflow hydrograph for each sediment pond was computed for the three storm events. Finally, the performance of each sediment pond was evaluated using a computer program developed by the University of Kentucky Department of Agricultural Engineering. The results of this computer evaluation are detailed in Table 15. The results of the 2-year precipitation event are not included in this summary because the computer model simulated 100% trap efficiency for the total runoff. Because the computer model simulates flow through the basin as plug flow, the model assumes that the runoff from the 2-year storm event displaces the permanent pool of "clear" water. In an actual field situation, the pre-storm contents of the permanent pool which will be discharged prior to storm discharge will contain an unknown amount of colloidal material contributing to suspended solids in the effluent. Review of the data presented in Table shows that none of the enlarged basins met the suspended solids effluent limitations for the 5- and 10-year storms. For example, sediment pond PA-1, increased in size by 1220%, still produced a peak effluent concentration thirty-three times larger than the maximum allowable. It is obvious that the existing sediment ponds would perform poorly during a rare storm event.

### REVIEW OF PHYSICAL MODIFICATION ALTERNATIVES

During the course of Phase I of this study, it has become apparent that physical modification to sediment ponds may be made in any one of the three distinct parts of the pond:

1. Inlet portion
2. Body of the pond
3. Outlet portion

## TABLE 15. SUMMARY OF SIMULATED SEDIMENT POND PERFORMANCE[11]

| Pond | Precipitation event frequency 24 hr. duration | Detention time (hours) | Suspended solids (mg/l) peak inf. | peak eff. | Basin trap efficiency (%) |
|---|---|---|---|---|---|
| PA-1 | 5-year | 20.8 | 52,300 | 1730 | 99.0 |
| | 10-year | 25.0 | 54,300 | 2310 | 97.5 |
| WV-1 | 5-year | 25.7 | 21,000 | 1240 | 95.9 |
| | 10-year | 26.1 | 22,630 | 1280 | 94.3 |
| WV-2A | 5-year | 13.9 | 5,700 | 430 | 94.0 |
| | 10-year | 24.7 | 6,180 | 460 | 93.8 |
| WV-3 | 5-year | 26.3 | 41,300 | 1590 | 98.0 |
| | 10-year | 26.3 | 41,300 | 2300 | 95.8 |
| WV-4 | 5-year | 15.4 | 15,100 | 1240 | 93.5 |
| | 10-year | 25.7 | 17,100 | 1340 | 94.4 |
| KY-1 | 5-year | 16.3 | 10,700 | 590 | 95.8 |
| | 10-year | 26.2 | 10,400 | 646 | 94.9 |

The purpose of modifying the sediment pond's physical characteristics in these three areas is twofold; an attempt to simulate as close as possible the characteristics of an optimum theoretical sedimentation pond in the real world and an attempt to lessen the loading of sediment entering the basin. Simulation of near optimum performance can be accomplished by the reduction of short circuiting by use of a flared modified inlet, by a large surface area in the body of the pond or by the use of multiple outlets. Reduction of sediment loading to the pond may be accomplished by erosion control measures such as silt fences or log and pole structures. No matter what modification is proposed, one of two themes will be present; simulation of optimum conditions or reduction of sediment loading.

## Inlet Modifications

Modifications to the inlet of a sedimentation pond can be designed with any or all of three primary options in mind: 1) dissipation of energy in the influent to the basin, 2) distribution of the influent over the width of the pond; and 3) filtration of the influent.

### Energy Dissipaters--

An energy dissipation device decreases the inlet water velocity, thereby causing a fraction of the incoming suspended solids to settle out immediately. A partial list of energy dissipation devices will include dumped rock at the pond inlet, log or pole structures, and stone check dams.

The simplest energy dissipater consists of dumped rock placed at the end of the inlet channel as it enters the body of the pond. This technique effectively reduces the water velocity at the inlet causing some sediment to settle out and a delta of sediment is created beyond the dissipater as shown in Figure 24. Table 16 indicates the maximum size particle which will be scoured from the bottom at the velocities shown. Reference 13 has a useful section on design of outlet protection using riprap which would also be applicable here and should be consulted when using a riprap energy dissipater.

Another technique which provides a combination of energy dissipation and staged settling is a log or pole structure. This structure is a barrier constructed of logs or poles cut during clearing of the area. The logs and poles are placed across a natural or constructed drainway in an upright position as shown in Figure 25. The purpose of this structure is to retard stream flow and catch the larger particles of sediment. One

problem encountered with the use of these structures is the removal of the trapped sediment. Care must be taken that another structure is in place downstream in order to trap sediment released during the removal of the upstream structure.

**Figure 24. Influent energy dissipation by dumped rock.**

## TABLE 16. SCOUR VELOCITY VS PARTICLE SIZE

SPECIFIC GRAVITY = 2.65
B = .04
F = .02

| Velocity (cm/sec) | Particle size (millimeters) |
|---|---|
| 15.24 | 0.009 |
| 30.48 | 0.036 |
| 45.72 | 0.080 |
| 60.96 | 0.143 |
| 91.44 | 0.323 |
| 121.92 | 0.574 |

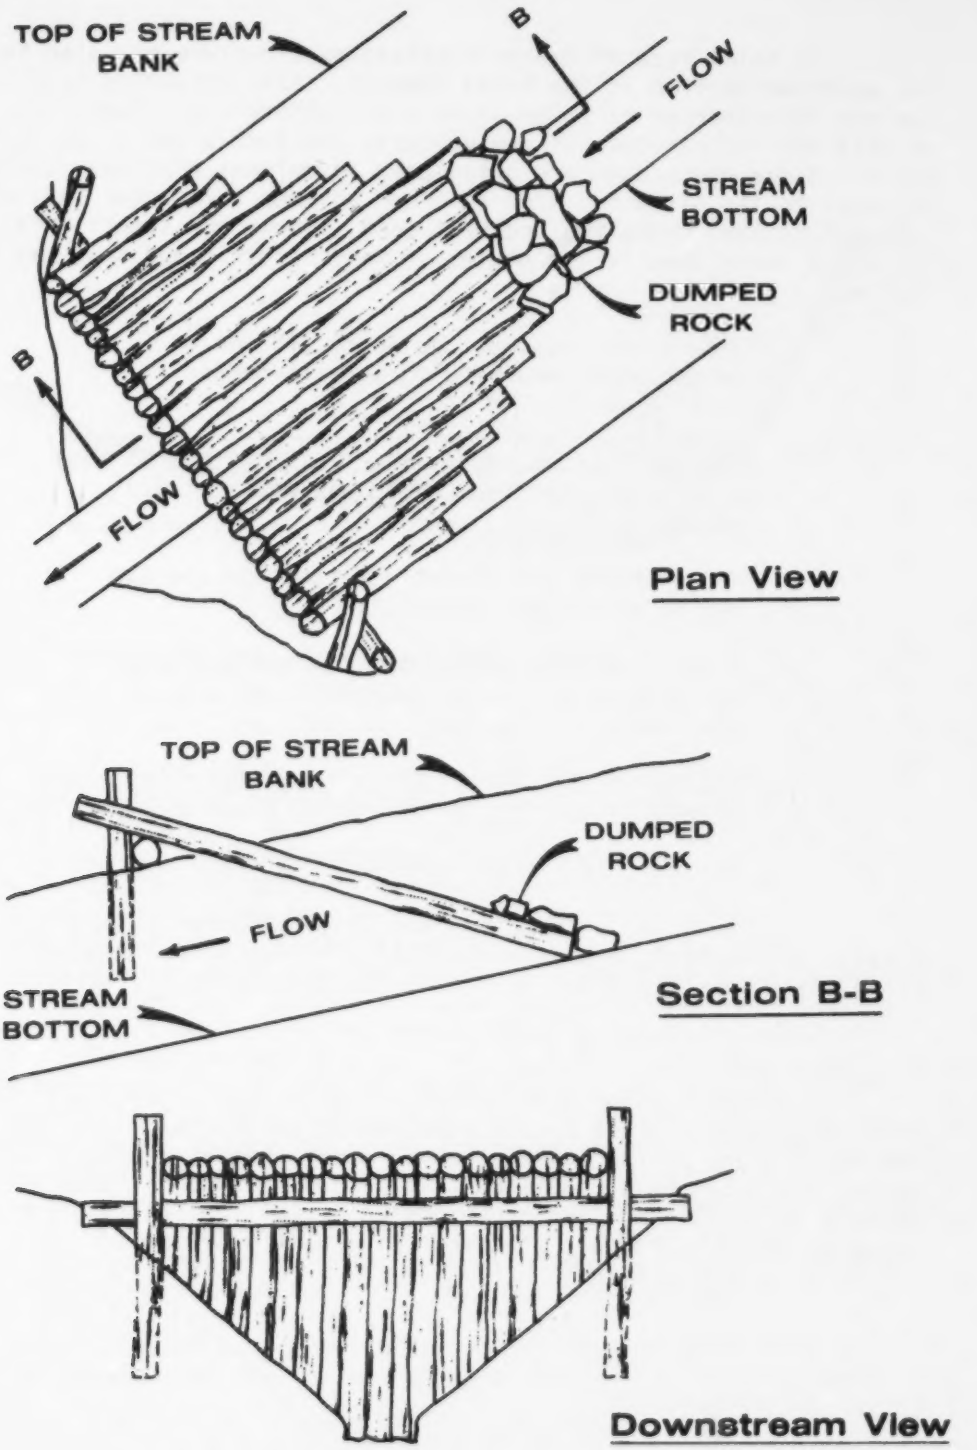


**Figure 25. Log and pole silt structure.** [12]

A third type of energy dissipation structure may also be used on the upstream section of the inlet channel. This structure is a stone check dam and is a barrier of large stone built across a drainway. The purpose of this dam is to reduce stream velocity and form a small sediment catch basin. Stone check dams are often used in natural drainways directly adjacent to the disturbed area in order to trap the larger sediment particles before they reach the sediment pond. There are specific requirements for stone check dams in the states of West Virginia and Kentucky as follows:

1. 25% of the rock must be 46 cm (18 in) or larger with remaining to be well-graded to fill voids.

2. The dam must be keyed into the sides and bottom of channel a minimum depth and width of 0.91 meters (3 ft)

3. The upstream and downstream slope of the dam may be no steeper than 3:1.

4. A weir must be constructed the average width of the channel with a minimum depth of one foot at the center of the dam.

5. Maximum height permitted is four feet from original channel at centerline of dam to crest of weir.

6. Minimum top width of the weir is five feet.[13]

In Kentucky, a check dam may be constructed of logs six inches or greater in diameter, placed horizontally in the stream channel. Log and stone check dams are shown in Figures 26 and 27 respectively.

Flow Distribution--

A second major means of modification again deals with inlet structures and involves use of some method to discharge the influent over the total width of the sediment pond rather than at a single influent point. This can be accomplished with three techniques, used either separately or in tandem. The three possible modifications include the use of an apron inlet, strategic placement of a baffle at the inlet, or multiple rather than single inlets.

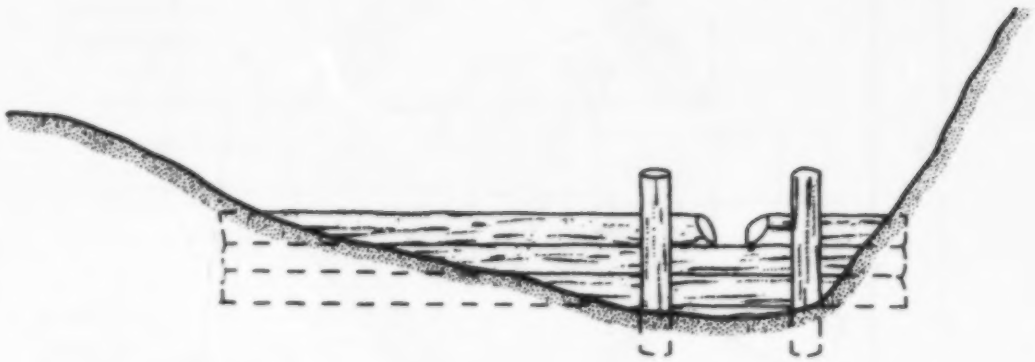

**Figure 26. Log check dam.**[14]

First, an apron can be built, as shown in Figure 28, at the end of the inlet channel, where it enters the pond, to distribute the flow evenly over the width of the pond. By doing this, short-circuiting through the pond can be lessened. A second method of flow distribution involves use of a baffle within the body of the pond located approximately one-third the distance from the inlet to the outlet to allow for velocity reduction. The baffle, if constructed along the entire width of the pond as shown in Figure 29A, should be an overflow type baffle. In addition to distributing the flow over the total width of the pond, an inlet overflow baffle gives the added benefit of staged settling, since influent velocity reduction occurs rapidly causing the heavier particles to settle out almost immediately. Several types of inlet "directional" baffles, which do not extend the complete width of the pond, may also be used to direct the inflow to the sides of the pond. Figure 29B shows the location and direction of flow; with the inlet directional baffle mounted perpendicular to the influent flow direction, and Figure 29C shows the inlet directional baffle mounted at a 45° angle to the perpendicular of the flow direction. A typical baffle constructed of exterior grade plywood is shown in Figure 30 and may be used as an overflow baffle or as a directional baffle.

Another influent modification for achieving increased influent flow distribution would be the use of multiple inlets. If the sediment

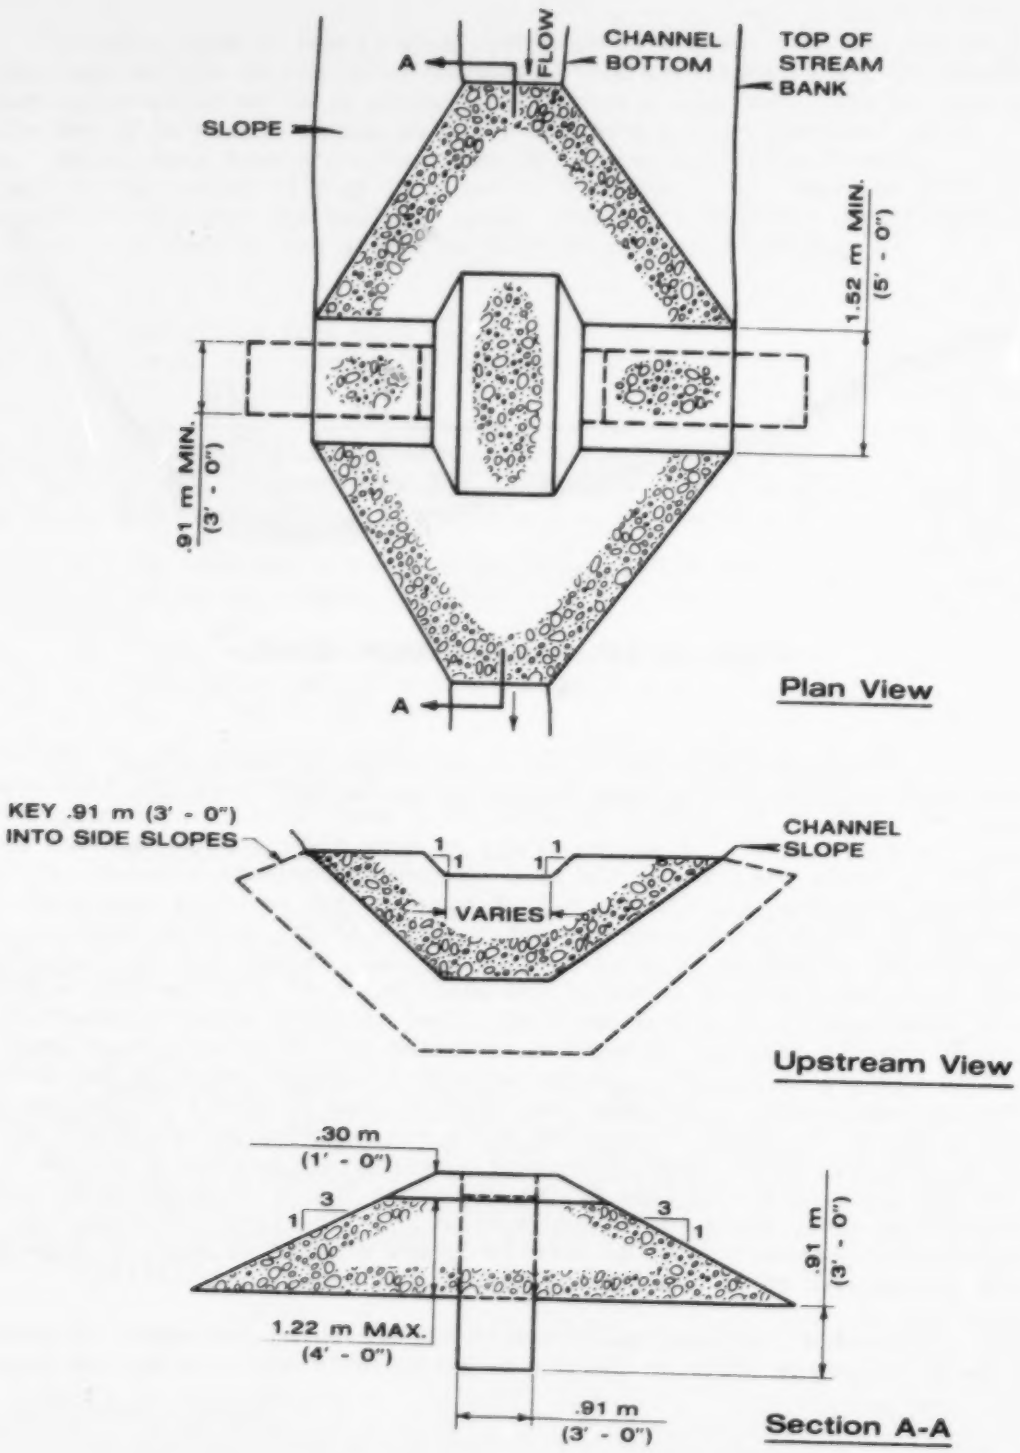


**Figure 27. Stone check dam.**[15]

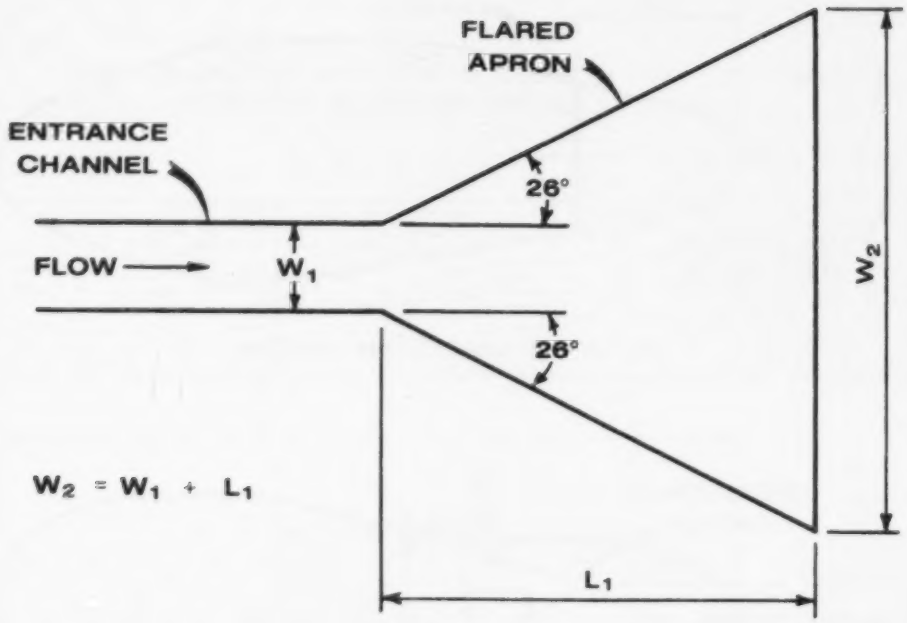


**Figure 28. Flared apron entrance channel.**[16]

pond to be constructed is of the type located off the main or natural drainage system (away from the stream channel), then multiple inlet flow distribution would be rather simple to add to the design. Construction of multiple inlets in a relatively flat area would not be difficult because there would be no limitations of excavation capability due to topographic constraints. For example, rather than introducing the flow to a rectangular pond at a single point, a branching of the influent channel is possible. If branching is used, care must be taken to provide adequate channel erosion control in order to direct the flow where desired. Figure 31 indicates the branching of flow into a rectangular basin. In this example, two primary branches are shown which will handle normal flow to the basin. The control channel is indicated as secondary and will be used only during high flow conditions. An inlet control device, such as a V - notch weir should be used on the secondary channel to prevent a straight through flow during low flow or a by-passing of the primary branches.

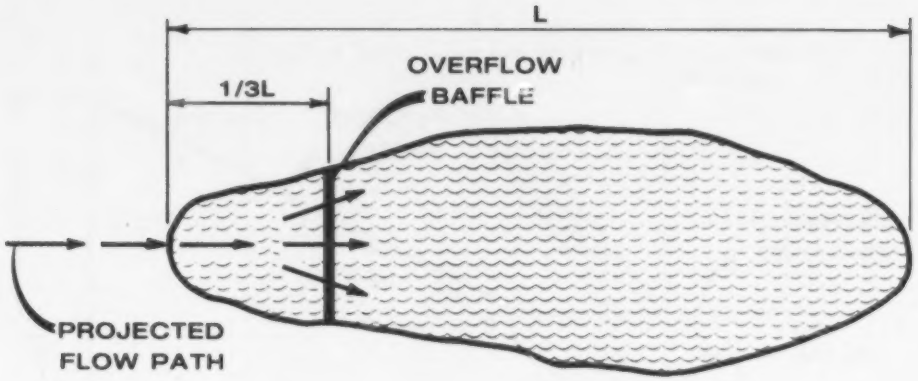


A. Inlet overflow baffle.

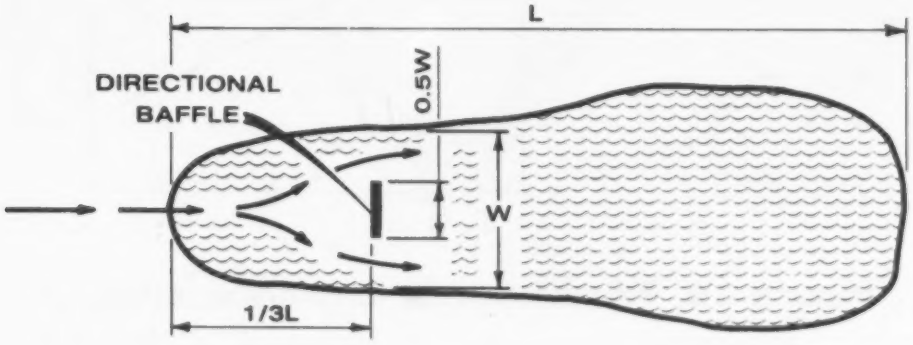


B. Inlet directional baffle.
(perpendicular)

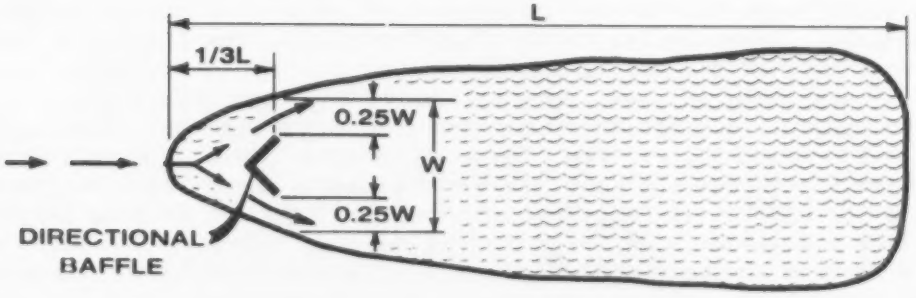


C. Inlet directional baffle.
(45° angle)

**Figure 29. Sediment pond inlet baffles.**

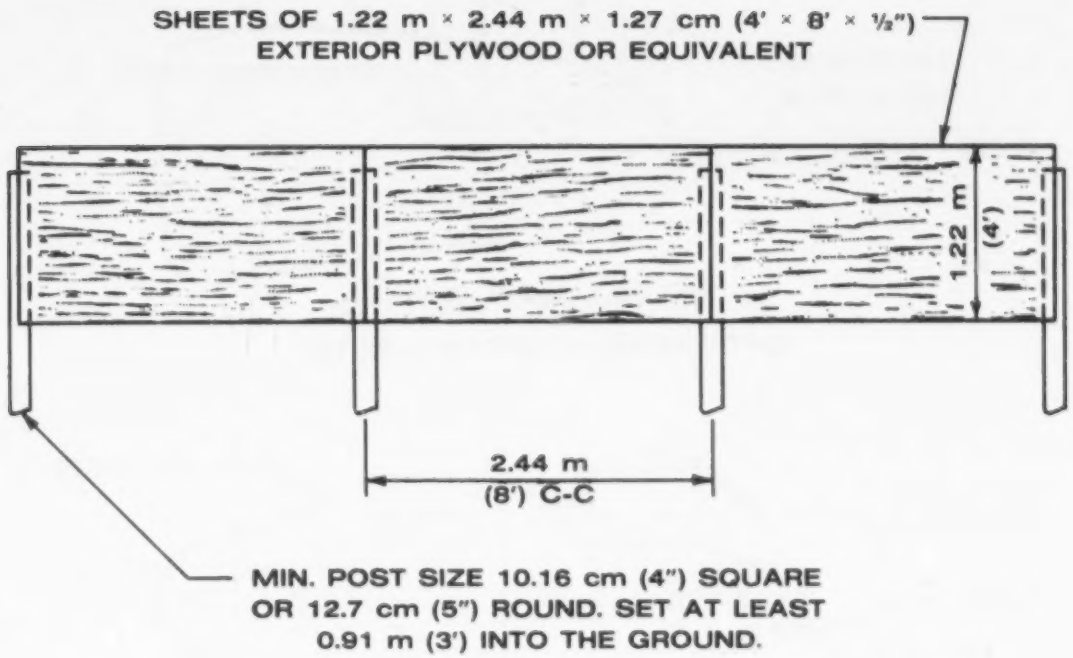
SHEETS OF 1.22 m × 2.44 m × 1.27 cm (4' × 8' × ½")
EXTERIOR PLYWOOD OR EQUIVALENT
1.22 m
(4')
2.44 m
(8') C-C
MIN. POST SIZE 10.16 cm (4") SQUARE
OR 12.7 cm (5") ROUND. SET AT LEAST
0.91 m (3') INTO THE GROUND.

**Figure 30. Baffle detail.**[17]

Filtration of Influent--

A final modification to the inlet area of a pond introduces the filtration of the influent through a silt fence or straw bale barrier prior to entering the pond. The applicability of this technique is limited to very small drainage areas (.20 ha or less) leading into a sediment pond located off the main drainage system. Figure 32 shows a detail of the placement of a straw bale barrier and Figure 33 depicts the placement of a silt fence both of which should be located on the immediate perimeter of the disturbed area.

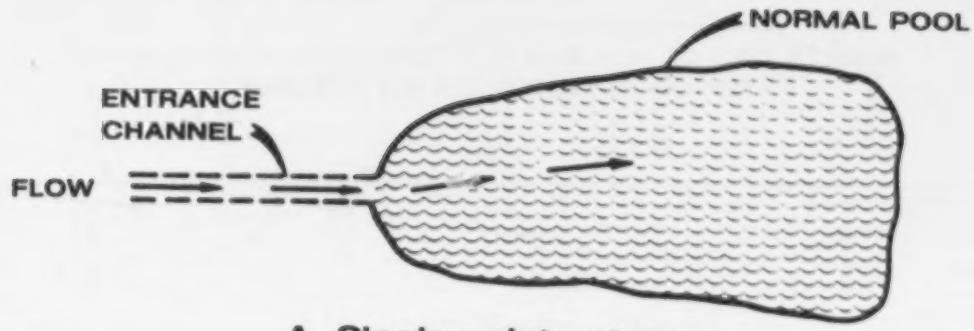


A. Single point entrance
(promotes short circulting)

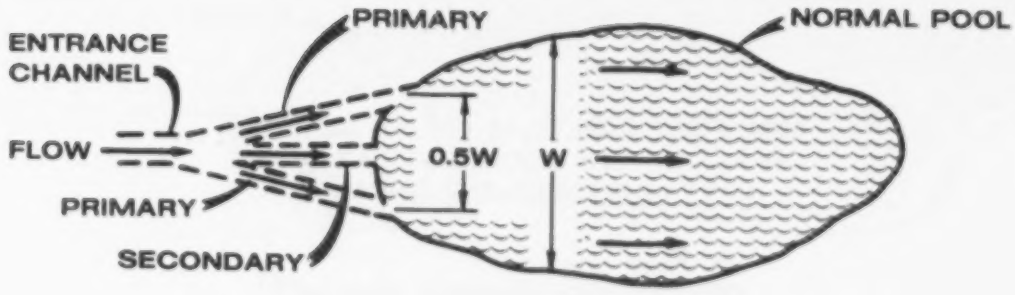


B. Multiple entrance

**Figure 31. Multiple inlets by inlet channel branching.**

Pond Modifications

Physical modifications applicable to the main body of a sediment pond are limited to two basic concepts:

1. Compartmentalization of the basin to induce staged settling

2. Size and shape modifications

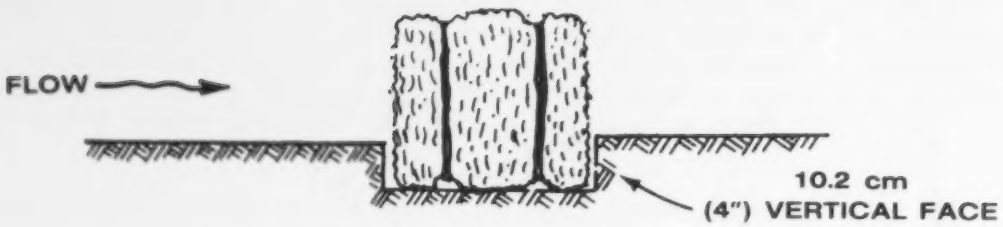


Embedding Detail

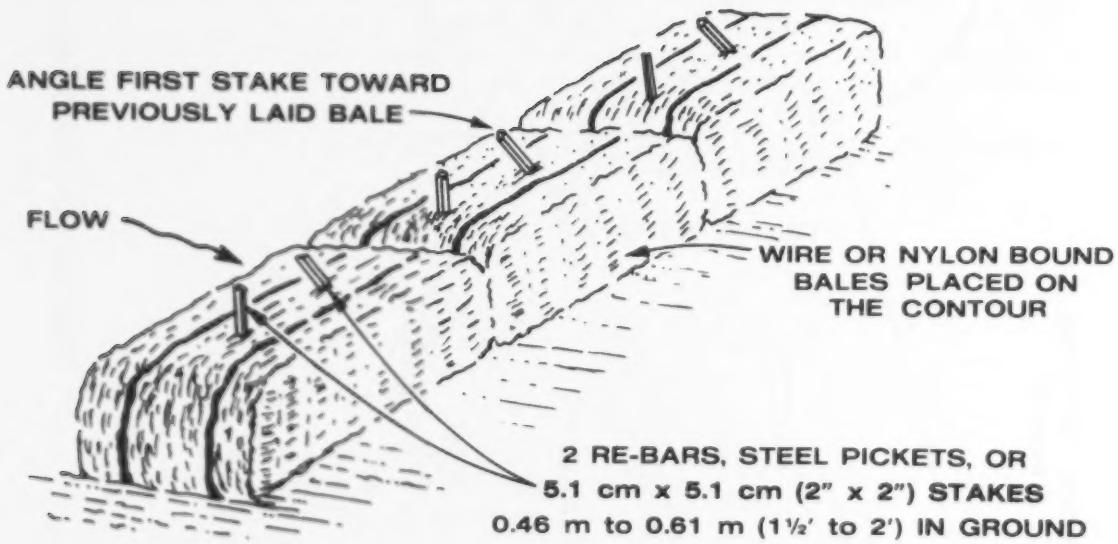
ANGLE FIRST STAKE TOWARD
PREVIOUSLY LAID BALE
FLOW
WIRE OR NYLON BOUND
BALES PLACED ON
THE CONTOUR
2 RE-BARS, STEEL PICKETS, OR
5.1 cm x 5.1 cm (2" x 2") STAKES
0.46 m to 0.61 m (1½' to 2') IN GROUND

Anchoring Detail

**Figure 32. Straw bale barrier.**[18]

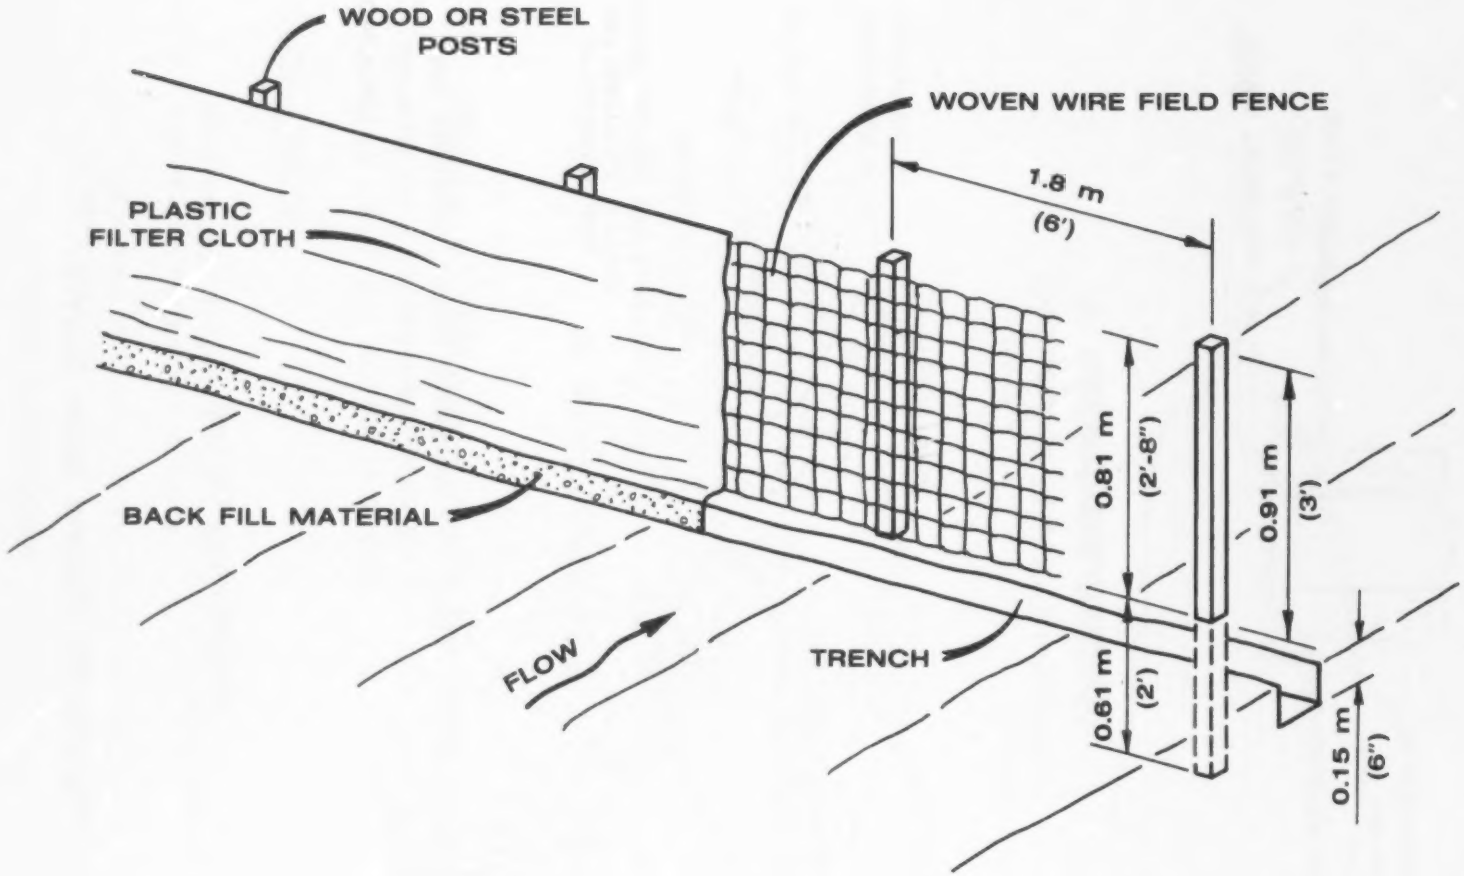


**Figure 33. Silt fence.**[19]

As stated previously, the purpose of pond modifications is to simulate ideal conditions or compensate for non-ideality. Compartmentalization compensates for non-ideality by reducing turbulence and decreasing short-circuiting, and size and shape modifications attempt to simulate ideal conditions by directing the influent through a larger percentage of the entire volume for settling, thus also reducing short-circuiting.

Compartmentalization of the Basin to Induce Staged Settling--

Compartmentalization of the body of the pond refers to either the use of separate and distinct sediment ponds in a series or the division of a single pond through the use of baffle walls. The benefit of the use of this concept is that a staged settling of suspended solids will occur. The solids having a higher settling velocity (heavier particles) will settle in the first pond or settling area with the final pond or area acting as a polishing unit to remove the remaining finer grained sediment. By taking advantage of this technique, the majority of sludge removal and disposal will take place during maintenance of the first sediment pond, or pond segment, while maintenance performed on the final pond will be minimized. As stated above, compartmentalization of a single pond can be accomplished through the use of a baffle wall constructed of wood or other suitable material placed at a position, approximately one-third of the total length of the pond from the inlet, so that a larger more quiescent compartment is formed as a final section for fine-grained sediment removal.

When designing series settling ponds, the following factors must be considered:

1. Required total sediment storage for all ponds may be considered additive;

2. Inlet and outlet structures must be sized independently and must consider the total drainage area of each pond, including the outflow from previous ponds;

3. Required detention time for each pond must be considered in light of the hydrograph modification of upstream ponds.

Size and Shape Modifications--

The use of size and shape modifications to the body of sediment ponds refers in part to the consideration of surface area in sizing of ponds, the use of a length: width ratio criteria to determine pond shape, and alteration of depth of a pond.

In the design of sedimentation basins, many methods are available ranging from rather simple analyses to complex methods using computer modelling. Generally speaking, all methods require the input of several pieces of basic information including:

1. Determination of sediment storage volume;

2. Determination of detention volume and pond peak outflow; and

3. Determination of trap efficiency.

Determination of Sediment Storage Volume--

Current requirements of the Office of Surface Mining (OSM) specify a sediment storage volume equivalent to 0.1 acre-feet of storage for every acre of disturbed area in the watershed. If so desired, the operator may compute the volume of sediment which would be expected to be deposited in the basin. A method to compute sediment yield from a watershed is the modified universal soil loss equation (MUSLE) as developed by Williams. This equation determines the gross erosion in tons from the watershed delivered to the sediment pond.

Determination of Detention Volume--

OSM currently requires a detention volume for sediment ponds which will retain the runoff from a 10-year 24-hour precipitation event for a period of 24 hours. This detention time may be lowered to 10 hours if the operator can prove to the regulatory authority that the current effluent limitations for suspended solids can be met. The detention time may be lowered to less than 10 hours if chemical treatment is used.

After the desired detention time has been selected, the computation of required basin size is begun. To determine basin volume, an inflow hydrograph of the design storm must be computed. Several methods of hydrograph computation are available, all of which are discussed in detail in available references. After determination of the inflow hydrograph, the next step in design involves the sizing of the basin and discharge device to provide the required detention time. The gross volume of the basin may be estimated by determining the total amount of runoff from the design storm event. Ward et al, describe a simple procedure to determine the required storage for various detention times plus the peak outflow which will provide that detention time.[20] After estimation of the required storage volume and selection of an appropriate outlet device to provide the desired peak outflow rate, a reservoir routing computation should be

performed to determine the outflow hydrograph. The actual detention time of the basin may then be determined by finding the time difference between the centroids of the inflow and outflow hydrographs.

Determination of Trap Efficiency--

In order to design a sediment pond for a specific trap efficiency, a design storm must be specified, the particle size distribution of the incoming sediment must be known as well as the incoming sediment load. Methods to determine trap efficiency also vary between rather simple analyses to the more complex methods, using computer simulation of basin performance. Chen describes three methods of trap efficiency computation: Brune's method; Churchill's method, and Camp's method. Camp's method is probably most familiar to design engineers and describes the relation between the settling velocity of particles being removed and the surface loading or overflow velocity of the basin. By dividing the outflow rate by the surface area of the pond ($Q_o/A$), the settling velocity of particles completely removed may be computed. After computing the settling velocity of the removed particles, the trap efficiency of the reservoir may be determined from the influent particle size distribution. Among the more complex methods of trap efficiency determination are those requiring computer simulation. The University of Kentucky Department of Agricultural Engineering has done extensive work in this area and has developed a computer modelling technique for sediment pond performance entitled the "DEPOSITS" model.[21] The DEPOSITS model can be used to compute the effluent sedimentgraph which will specify the concentration of suspended solids in the effluent at various times during the passage of the design event.

After determination of the sediment pond dimensions, the shape of the pond can now be determined. Modifications to the shape of a pond are done in the attempt to simulate optimum conditions. A quantitative measurement of shape is the length:width ratio of the pond surface area. A length to width ratio of 5:1 for the surface area of a sediment pond has been recommended to reduce the possibility of short-circuiting.[22] Should the terrain of the area preclude the construction of a standard rectangular pond, the 5:1 length to width ratio may be attained through the use of baffles placed in the pond. In computation of the length to width ratio of an abnormally shaped pond, the effective width ($W_e$) is first computed as follows:

$$W_e = \frac{A}{L}$$

A = surface area of pond

L = linear distance from point of inflow to point of outflow

Subsequently the length to width ratio may be computed as

$$L:W = \frac{L}{W}$$

If the L:W ratio is less than 5:1, then it is advised that baffles be placed for increased length of flow path. Figure 34 shows three cases where a strategically placed baffle will increase the length of flow path. In all cases of pond shape, the effective length to width ratio may be computed and used to quantify the pond's attempt to simulate ideal conditions.

An additional modification to the body of a pond concerns the profile of the depth from inlet to outlet. In previous discussion, it has been indicated that the majority of settling occurs in the first one-third of the basin. To account for this phenomenon by minimizing sludge removal requirements in this area, a sloping pond bottom is recommended, with the greater depth being at the inlet. Several advantages of this modification are obvious. The velocity of the influent will be reduced as it enters this deep area, with a greater sludge storage capacity, the frequency of sludge removal is decreased, and a shallow effluent area will allow smaller size particles to settle out. When designing a pond to include the staggered depth modification, one must also consider its affect on pond outlet structures and dewatering devices.

## Outlet Modifications

Outlets for sediment pond currently in use include:

1. A pipe with riser barrel as used in sediment ponds WV-3 and KY-1.

2. An exit channel excavated in the embankment as in sediment ponds WV-1, WV-2, and WV-4.

3. A "flat lip" discharge as used in sediment pond PA-1.

A point outlet for a sediment pond is objectionable because of the tendency to cause short-circuiting and excessive turbulence at the point of discharge. The options to avoid single point discharges and associated short-circuiting include modification of the standard riser barrel, flared exit channels, baffled outlets, and a vegetative filter.

The use of perforated riser barrels in sediment ponds is required in some states in order to drain the pond between storm events. The use of perforations can lead to poor pond performance in that some sediment may be

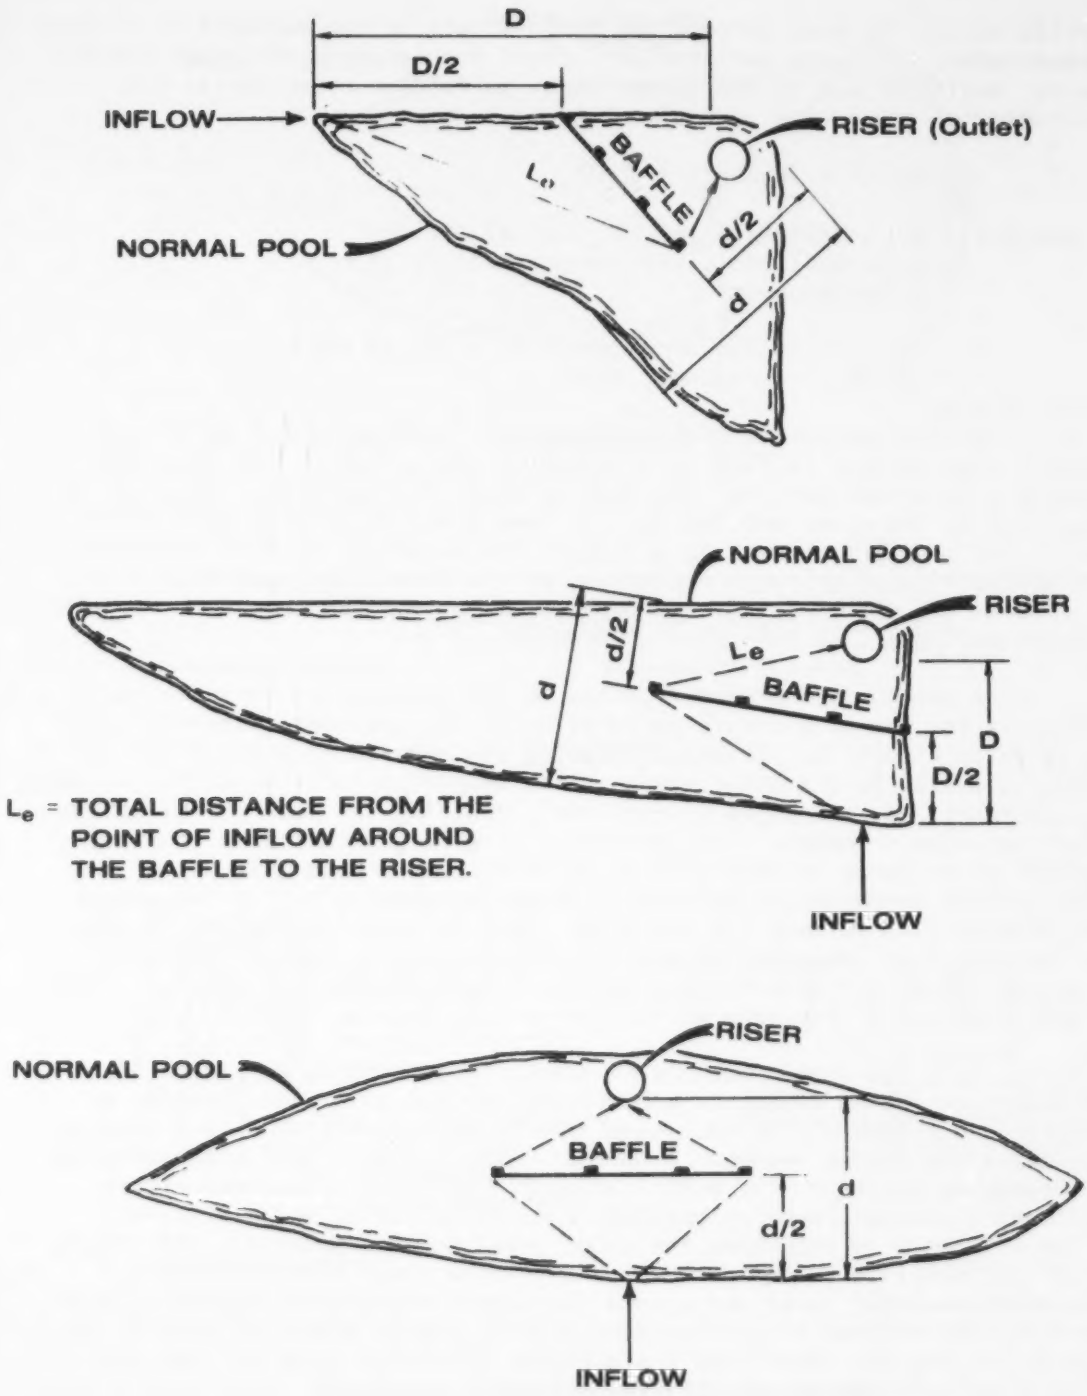


**Figure 34. Sediment pond baffle placement to increase L:W ratio.**[23]

carried out of the pond through the perforations if the sediment is allowed to accumulate or if the perforations extend too far down the riser barrel. Several modifications to the conventional perforated riser barrel are available for dewatering of sediment ponds.

1. Use of a subsurface drain

2. One perforation in the riser at sediment clean-out level, with associated use of a skimming device

3. Use of a siphon arrangement to drain to the sediment - clean-out level

In the subsurface drain arrangement, a 10-cm (4-in) perforated plastic pipe network is laid in a trench in the bottom of the pond and covered with a fabric filter and sand as shown in Figure 35. The pipe is connected to the riser and the pond is dewatered through the sand filter perforated pipe arrangement by gravity. One advantage of this method is the possibility of thorough dewatering of the accumulated sediment to aid in removal and disposal. A major consideration must be, however, the added expense of installing this pipe arrangement.

A second type of modification to the standard perforated riser barrel is the use of a single perforation at the sediment clean-out level as shown in Figure 36. This modification can be used in association with a skimming device to prevent clogging. The single perforation method is easy to construct and is capable of completely draining the pool to the sediment clean-out level; however, the perforation may clog with trash, it is not capable of skimming surface debris, and will pass a base flow out of the pond without detention if sediment storage capacity is full. The single perforation with skimmer, on the other hand, is non-clogging, fairly easy to construct, an efficient skimmer of surface debris, and is capable of draining the detention pool to clean-out level; however, it also will pass a base flow out of the pond without detention.

With the siphon methods of dewatering, as shown in Figure 37, a 10.2-cm (4-in) pipe siphon is substituted for the single perforation as described previously. In each case, the inlet to the siphon is placed at the elevation of the sediment clean-out level to facilitate drainage without removing sediment. In modification A, the siphon is primed at the sediment clean-out level as opposed to modification B, which will only prime and begin to flow when the water level reaches point A. The siphon will then continue to drain the pond until the water level reaches the sediment clean-out level and breaks the siphon. The short siphon is also an efficient skimmer of surface debris, will always drain the pond to the sediment clean-out level, and has a higher discharge capacity than the single perforation method. This technique will, however, also pass a base

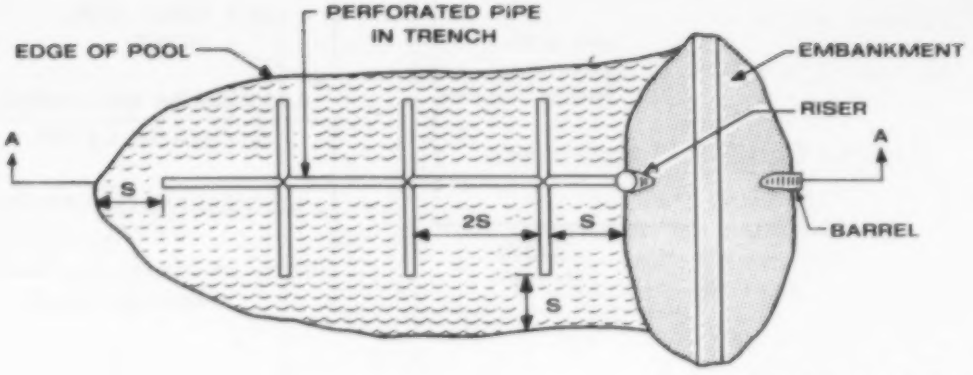


Plan

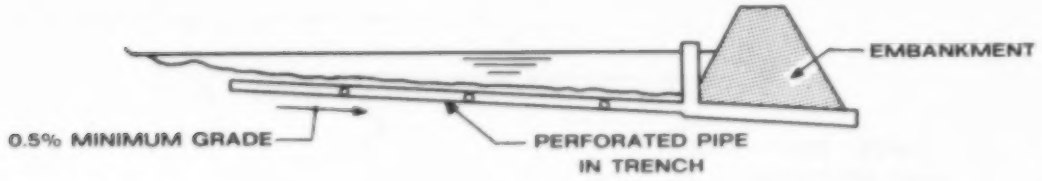


Section A-A

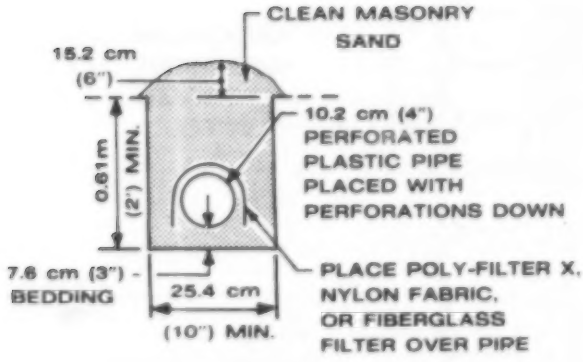


Cross-Section
Drain Pipe in Trench

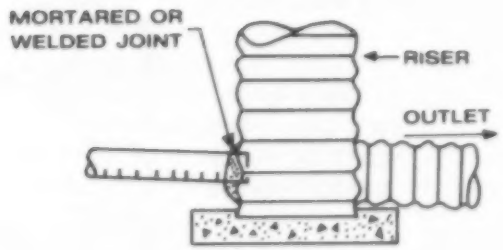


Riser
Connection

**Figure 35. Subsurface drain.**[24]

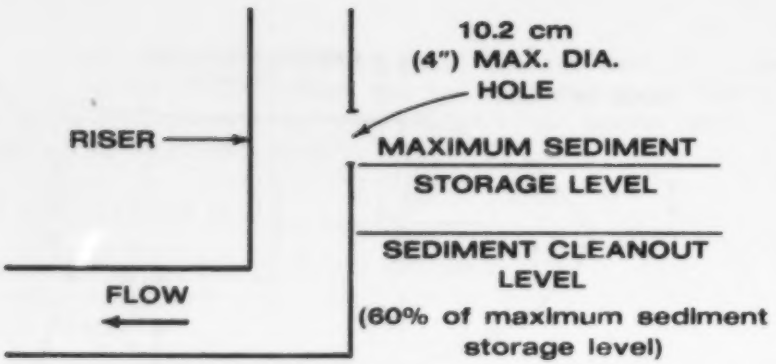


**Single Perforation**
(Cross Section)

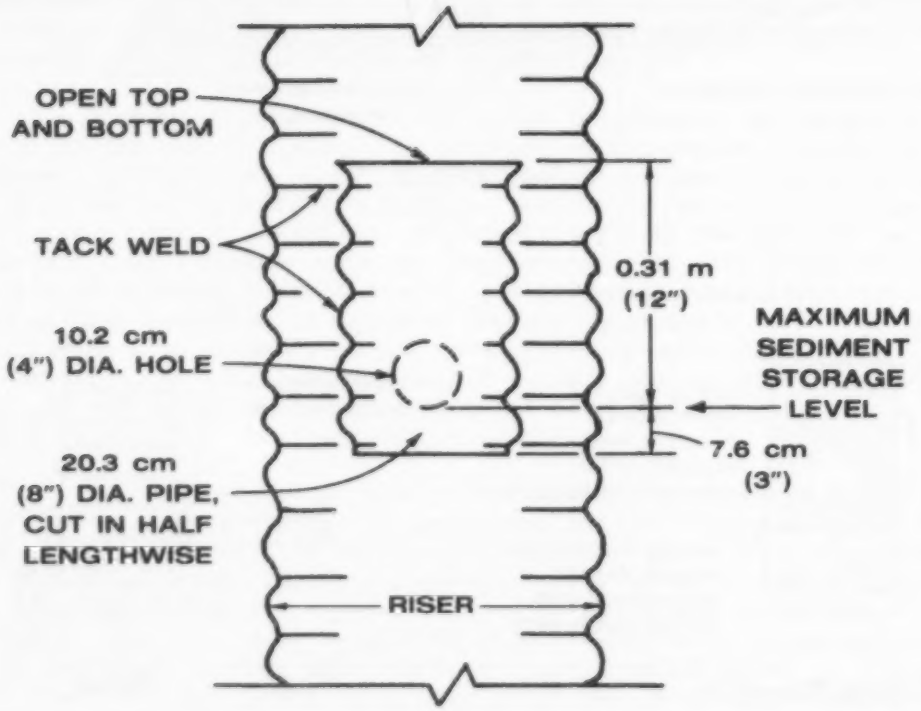


**Single Perforation With Skimmer**
(Elevation)

**Figure 36. Single perforation of riser barrel.**[25]

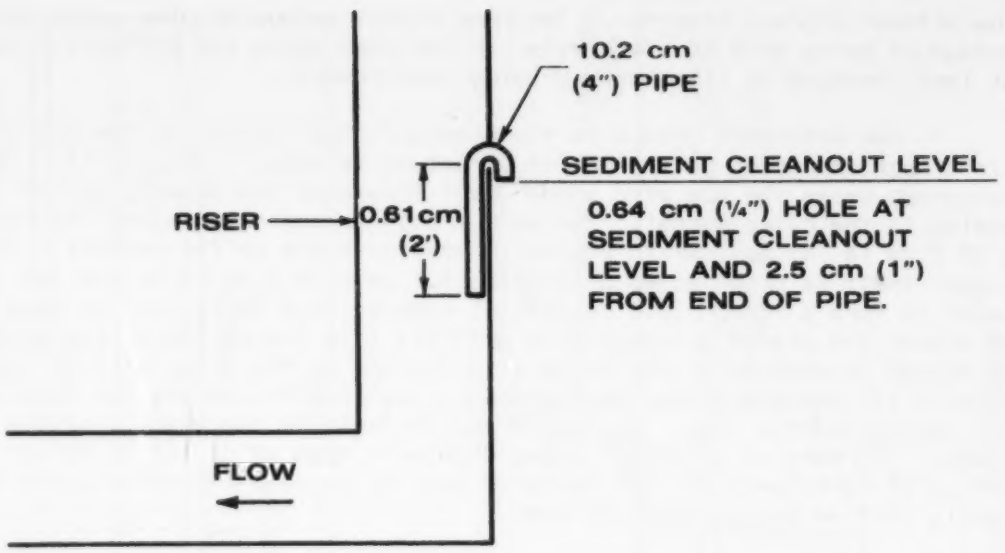


A. Short siphon cross-section.

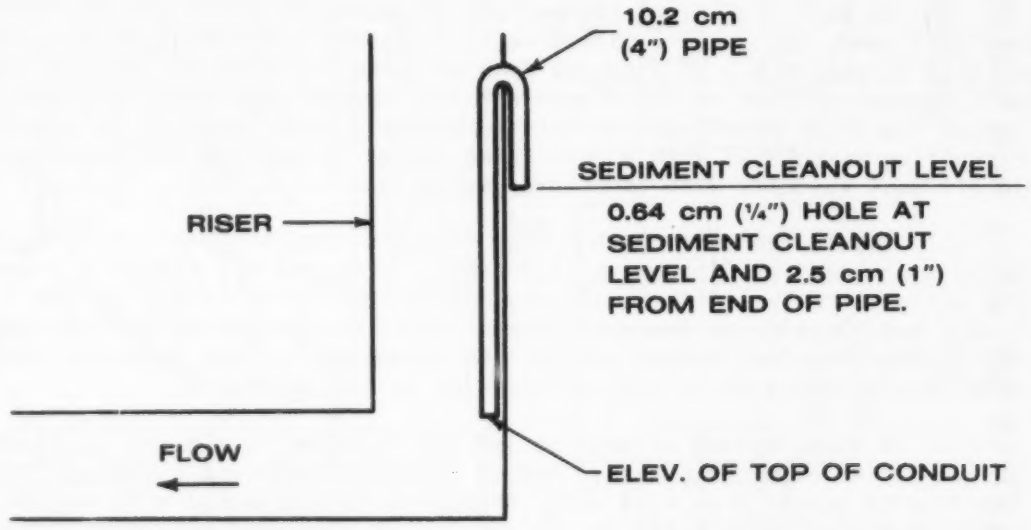


B. Long siphon cross-section.

**Figure 37. Siphon dewatering methods.**[26]

flow without storage of water. The long siphon method has the added advantage of being able to store water in the pond above the sediment clean-out level because of its siphon priming requirement.

One alternate choice to the standard riser barrel is the use of a weir trough connected to the outlet structure as shown in Figure 14. This photograph shows the use of a wooden weir trough as the primary outlet leading to the riser barrel. The weir trough is supported along its length by 10.2 cm (4 in) posts with braces located on 1.8 m (6 ft) centers. The trough itself is constructed of treated 5.1 cm x 15.2 cm (2 in x 6 in) lumber to form a trough 30.5 cm (12 in) wide by 14.0 cm (5 1/2 in) deep. The braces are placed at least 0.92 m (3 ft) into the bottom of the pond, the trough is mounted on the brace with a slope to the riser of 0.83 cm/m (1 in/10 ft) and the lumber is thoroughly coated with roofing tar to protect against weathering. Figures 38 and 39 indicate the details of the trough. The main advantage of using this weir type of outlet is the elimination of turbulence at the discharge and the possibility of scouring previously settled solids from the pond.

All of the previously discussed modifications to the standard riser barrel discharge have specific advantages and disadvantages related to each technique. The decision to use or not use the techniques must be made on an objective basis weighing the possible improvement of pond efficiency vs additional cost.

In modification of the outlets of excavated ponds and excavated sediment dams, the primary objective is to spread the outflow over a large an area as possible. This can be done by using a flared entrance to the exit channel similar to the flared entrance channel described previously. One of the major advantages of this technique is the reduction of short-circuiting associated with a restricted outlet in addition to the reduction in effluent velocity with associated turbulence.

Should the construction of a flared effluent channel be undesirable, a strategically placed baffle, shown in Figure 40, placed in front of the entrance to the exit channel may reduce short-circuiting. An additional modification to the exit channel would be the use of multiple outlets rather than one single outlet. An advantage to this technique would also be the reduction of short-circuiting in the pond.

A final method of pond outlet modification is the use of a vegetative filter of marsh plants. Recent research in Poland has shown that the flow of runoff from mine areas through an area covered with bog and peat vegetation contributes to the removal of suspended solids to a great extent. This removal ability has been determined for such plants as the common reed, yellow flag, sweet flag, common rush, and redge. This vegetative filter would be used as a polishing pond prior to final discharge. Its applicability would be limited to a relatively flat terrain where a large surface area would be available for a very quiescent movement of flow in the basin.

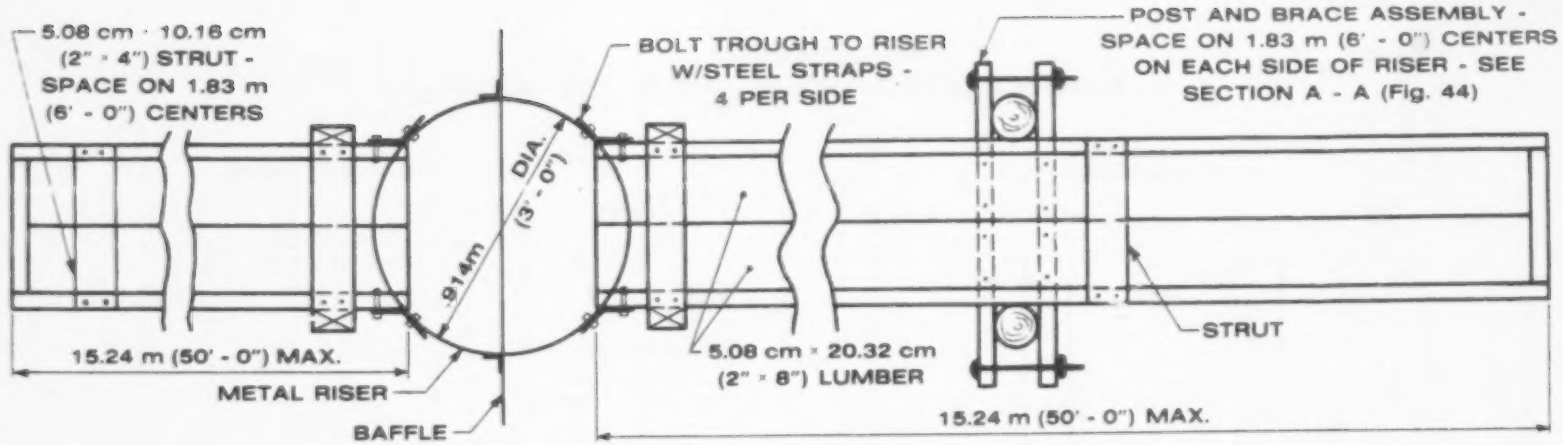
5.08 cm · 10.16 cm
(2" × 4") STRUT -
SPACE ON 1.83 m
(6' - 0") CENTERS
BOLT TROUGH TO RISER
W/STEEL STRAPS -
4 PER SIDE
POST AND BRACE ASSEMBLY -
SPACE ON 1.83 m (6' - 0") CENTERS
ON EACH SIDE OF RISER - SEE
SECTION A - A (Fig. 44)
.914m DIA.
(3' - 0")
15.24 m (50' - 0") MAX.
METAL RISER
BAFFLE
5.08 cm × 20.32 cm
(2" × 8") LUMBER
STRUT
15.24 m (50' - 0") MAX.

Plan

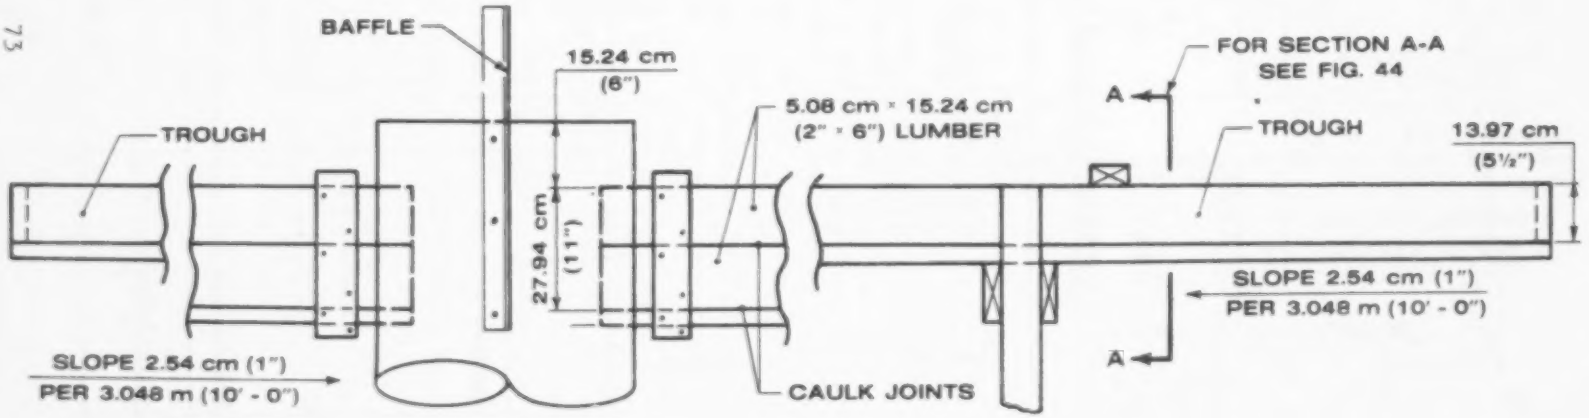


Elevation

**Figure 38. Riser and trough plan and elevation.**[27]

NO SCALE

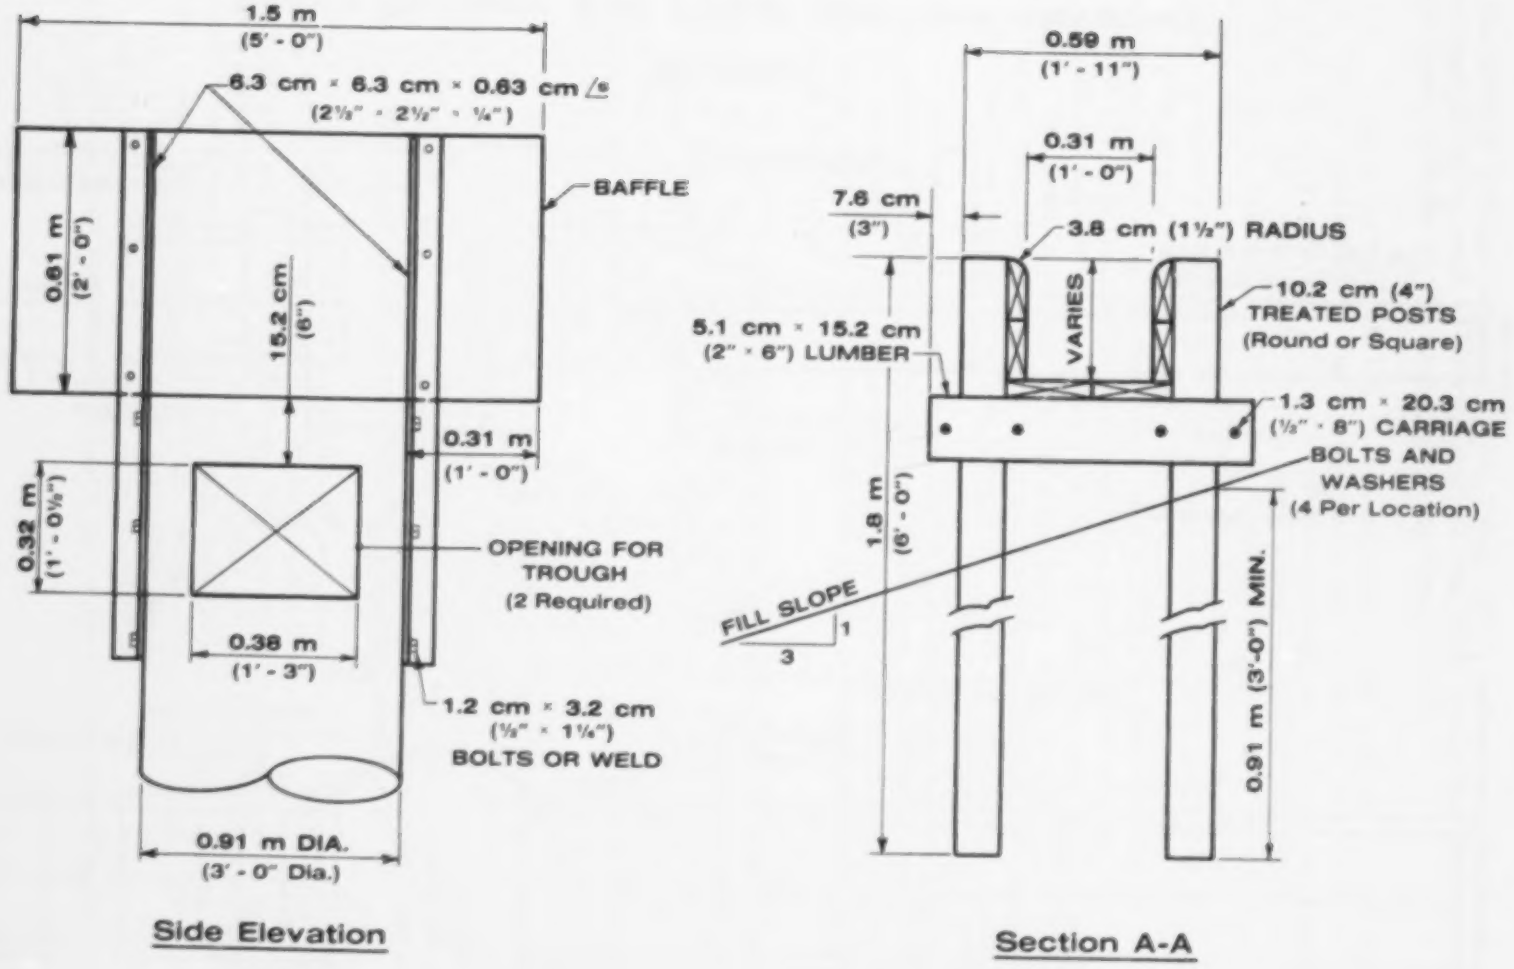


**Figure 39. Riser and trough details.**[28]

NO SCALE

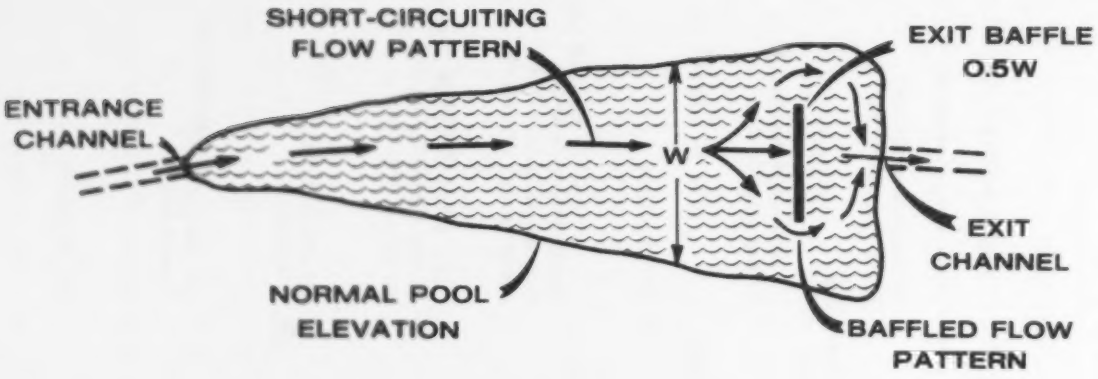


**Figure 40. Exit baffle.**

Summary

Physical modifications to sediment ponds, as described in the previous section, may be undertaken in various phases of pond construction. In order for a pond designer to make a decision regarding the selection of a specific modification, several factors must be considered. The economics of the design must be reviewed in light of any improvements or benefits that may be realized. The required maintenance schedule must be considered as well as the applicability of the modification to the local terrain. A summary of the suggested physical modifications has been compiled in Table 9, and includes an estimated cost of each structure, required maintenance, any improvements or benefits that may be realized and applicability of each respective modification. A designer may refer to this table for assistance in selecting a method to improve performance of a standard settling basin. It should be noted that no one method is recommended over another as each respective improvement method must be judged based upon the characteristics of each specific site.

Table 17 has been subdivided into four descriptive sections. The initial section is titled, Estimated Additional Cost. In this section, the cost figures that are presented were developed based upon readily available information. For each modification, an estimate of manpower, equipment, and material was made which would be required in excess of normal pond construction requirements. The second section, titled Maintenance Requirements, describes, in general terms, the frequency of removing settled matter and any maintenance of the structure. The Improvements/Benefits section characterizes improvements to settling efficiency by detailing action of each modification. Finally, the applicability of each modification is detailed to describe its placement depending upon variations in local terrain.

## TABLE 17. SUMMARY OF SEDIMENT POND PHYSICAL MODIFICATIONS

| Inlet modifications | Estimated additional costs | Maintenance requirements | Advantages/ disadvantages | Applicability |
|---|---|---|---|---|
| **Log and pole structure** | $500 | Periodic sediment removal | - Velocity reduction<br>- Removes 5% of suspended solids | - In natural drainway<br>- Steep sloped area |
| **Rock check dam** | $300 | Periodic sediment removal | - Velocity reduction<br>- Removes 5% of suspended solids 29 | - In natural drainway<br>- Steep sloped area |
| **Dumped rock at inlet** | $150 | Generally not required | - Velocity reduction | - All locations |
| **Silt fence** | $2.10/ft$^2$ | Periodic sediment removal | - Filters fine grained sediment<br>- Velocity reduction | - Small drainage areas<br>- Alongside natural or constructed drainways |
| **Straw bale dike** | $3.00/LF | Life expectancy of three months | - Velocity reduction<br>- Filtration<br>- Removes 5% of suspended solids | - Very small drainage areas<br>- Along natural or constructed drainways |
| **Multiple inlets** | $220 | Generally not required | - Inlet flow distribution | - On constructed drainways |
| **Inlet apron** | $450 | Generally not required | - Inlet flow distribution | - On constructed drainways |
| **Baffle at inlet** | $140 | More frequent sediment removal | - Velocity reduction<br>- Inlet flow distribution<br>- Reduction of short-circuiting | - All locations |

(continued)

## TABLE 17. (continued)

| Configuration modification | Estimated additional costs | Maintenance requirements | Advantages/ disadvantages | Applicability |
|---|---|---|---|---|
| **Series settling ponds** | Site specific | Majority of sediment removal in first pond | - Staged settling | - Flat to rolling terrain |
| **Divided settling pond** | $500 | Majority of sediment removal in first pond | - Staged settling | - All locations |
| **Additional pond storage** | Site specific | Less frequent sediment removal | - Longer detention times | - Flat to rolling terrain |
| **Additional surface area** | Site specific | None | - Removes smaller particles | - Flat to rolling terrain |
| **Baffle for L:W ratio** | $140 | Generally not required | - Increased detention time<br>- Reduction of short-circuiting | - All locations |
| **Staggered depth** | None | Majority of sediment removal at inlet area | - Less frequent sediment removal | - All locations |

(continued)

TABLE 17. (continued)

| Outlet modifications | Estimated additional costs | Maintenance requirements | Advantages/ disadvantages | Applicability |
|---|---|---|---|---|
| **Weir trough** | $450 | Generally not required | - Reduces effluent velocity<br>- Reduces turbulence | - Ponds with riser |
| **Subsurface drain** | $450 | Generally not required | - Can totally dewater pond<br>- Easily clogged | - All locations |
| **Single perforation in riser and with skimming device** | $ 36 | Generally not required | - Non-clogging<br>- Drains to sediment level | - Ponds with riser |
| **Riser barrel with siphon** | $ 50 | Generally not required | - Skims debris<br>- Drains to sediment level<br>- Higher discharge capacity | - Ponds with riser |
| **Flared exit channel** | $450 | Generally not required | - Reduction of short-circuiting<br>- Reduction of turbulence | - Excavated ponds |
| **Baffled exit channel** | $170 | Generally not required | - Reduction of short-circuiting | - All locations |
| **Multiple outlet** | $220 | Generally not required | - Reduction of short-circuiting | - All locations |
| **Vegetative filter** | $160 | Periodic sediment removal | - Polishing of effluent | - Flat or rolling terrain |

## EVALUATION OF COAGULANT USAGE

As discussed in the suspended solids removal section of the report, the settling velocity of a particle decreases dramatically as the size of the particle decreases. Conventional sedimentation techniques will generally not remove particles less than ten microns in diameter and another alternative technique must be used. One alternative technique is the use of chemical coagulants to cause the individual particles to agglomerate and settle as larger particles. As an additional phase of this study, the possible use of coagulants to improve the performance of surface mine sedimentation ponds was investigated.

### Coagulant Testing Program

The evaluation of commercially available coagulants was conducted in a four-phase effort as follows:

1. Initial contact with manufacturers to determine coagulant characteristics;
2. Preliminary laboratory testing of 30 to 40 coagulants;
3. Bench-scale treatability test of 6 to 10 coagulants chosen from step 2; and
4. Evaluation of the potential environmental impacts of coagulant use.

Step one involved a survey of coagulant manufacturers to tabulate specific physical and chemical characteristics and an elimination process to choose 30 to 40 coagulants to use in preliminary testing. Step two consisted of jar tests to determine the effectiveness of each coagulant in the removal of turbidity and suspended solids from water samples from the influent of each model sediment pond. From step two data, a list of 6 to 10 effective coagulants was chosen for a bench-scale treatability test during Step 3. The final phase of the laboratory study was to determine the potential environmental impacts occurring as the result of coagulant usage.

#### Step One - Initial Coagulant Manufacturer Survey--

The first step in the coagulant testing program was to contact manufacturers of commercially available coagulants to obtain information on their products and a sample for laboratory evaluation. A total of eighty manufacturers were contacted during the survey to obtain preliminary data. Samples of 144 commercially available coagulants were received along with detailed data on the physical and chemical characteristics of each. A

listing of the manufacturers contacted and the trade name identification of each coagulant can be found in the Appendix - Table A-1.

After receiving and tabulating the chemical and physical characteristics of the 144 coagulants, a screening and elimination process was begun to choose a group of 30 to 40 coagulants to use for preliminary testing on influent samples from the six model sediment ponds. The 144 coagulants were screened and subjected to a process of elimination based upon several criteria including:

- Operating characteristics
  - Chemical composition
  - Toxicity
  - Range of applicability
- Method of introduction to treatment system
- Reaction time requirements
- Sludge characteristics
- Economics

From this list of 144 organic coagulants, thirty-one plus alum and lime were chosen for the second phase of coagulant evaluation. The thirty-three coagulants have been tabulated with their specific physical and chemical characteristics in Table A-2 located in the Appendix.

A listing of the selected coagulants includes the following:

| Code # | Manufacturer | Trade Name |
|---|---|---|
| 3M | Allied Colloids, Inc. | Percol 727 |
| 6A | American Cyanamid | Magnifloc 573C |
| 6B | American Cyanamid | Magnifloc 577C |
| 6C | American Cyanamid | Magnifloc 581C |
| 6D | American Cyanamid | Magnifloc 585C |
| 6E | American Cyanamid | Magnifloc 587C |
| 6F | American Cyanamid | Magnifloc 589C |
| 15A | Buckman Laboratories | Hicat 1 |
| 17A | Calgon Corp. | Cat-floc |
| 17B | Calgon Corp. | Cat-floc T |
| 17C | Calgon Corp. | Cat-floc T-1 |
| 17H | Calgon Corp. | M-502 |
| 22A | Cities Service Company | Ferri-floc |
| 30A | Dow Chemical Co. | Separan MG-200 |
| 30B | Dow Chemical Co. | Separan MG-700 |
| 30C | Dow Chemical Co. | XD-30150.00 |
| 30D | Dow Chemical Co. | SC-30204 |
| 31A | Drew Chemical Co. | Amerfloc 485 |

| Code # | Manufacturer | Trade Name |
|---|---|---|
| 44B | Haviland Product Co. | Poly Floc C |
| 46A | Hercules Inc. | Hercofloc 812 |
| 46B | Hercules Inc. | Hercofloc 818 |
| 46C | Hercules Inc. | Hercofloc 821 |
| 46D | Hercules Inc. | Hercofloc 831 |
| 46E | Hercules Inc. | Hercofloc 849 |
| 46F | Hercules Inc. | Hercofloc 874 |
| 61F | Nalco Chemical Co. | Nalco 7107 |
| 61H | Nalco Chemical Co. | Nalco 7134 |
| 61K | Nalco Chemical Co. | Nalco 8851 |
| 61L | Nalco Chemical Co. | Nalco 8852 |
| 71C | Rohm & Haas Co. | Primafloc C-7 |
| 315 | American Cyanamid | Superfloc 315 |

Step Two - Preliminary Laboratory Testing--

The second step in the evaluation of the coagulants consisted of a laboratory jar test of each coagulant on all six of the model sediment pond water samples. Standard jar tests were preformed by adding 500 ml of the test water to 600 ml beakers and placing on a six position variable speed multiple paddle stirrer. Various dosages of each coagulant were added to the beakers followed by a rapid mix period of stirring the test water at 100 rpm for two minutes followed by a slow mix period of stirring at 50 rpm for five minutes. In addition to the coagulated samples, a control sample to which no coagulant was added was tested. After the slow mix period was completed, the water sample was allowed to settle undisturbed for three hours to observe floc formation, size of floc, sludge volume, settling rates, and any other noticeable characteristics. After settling for three hours, the supernatant from each beaker was decanted and analyzed for pH, turbidity, and suspended solids. The data for each model sediment pond water sample are recorded in Table A-3 located in the Appendix. Figures 41 through 45 graphically depict the percent removal of turbidity and suspended solids for the thirty-three coagulants tested at optimum dosage. A summary of the observations regarding the treatability of each mine water is as follows:

Coagulation of PA-1 Influent

- Control sample and all coagulated samples had a sludge volume of approximately 1%.
- All liquid coagulants formed small-flocced particles.
- All solid coagulants formed large-flocced particles other than 46A.

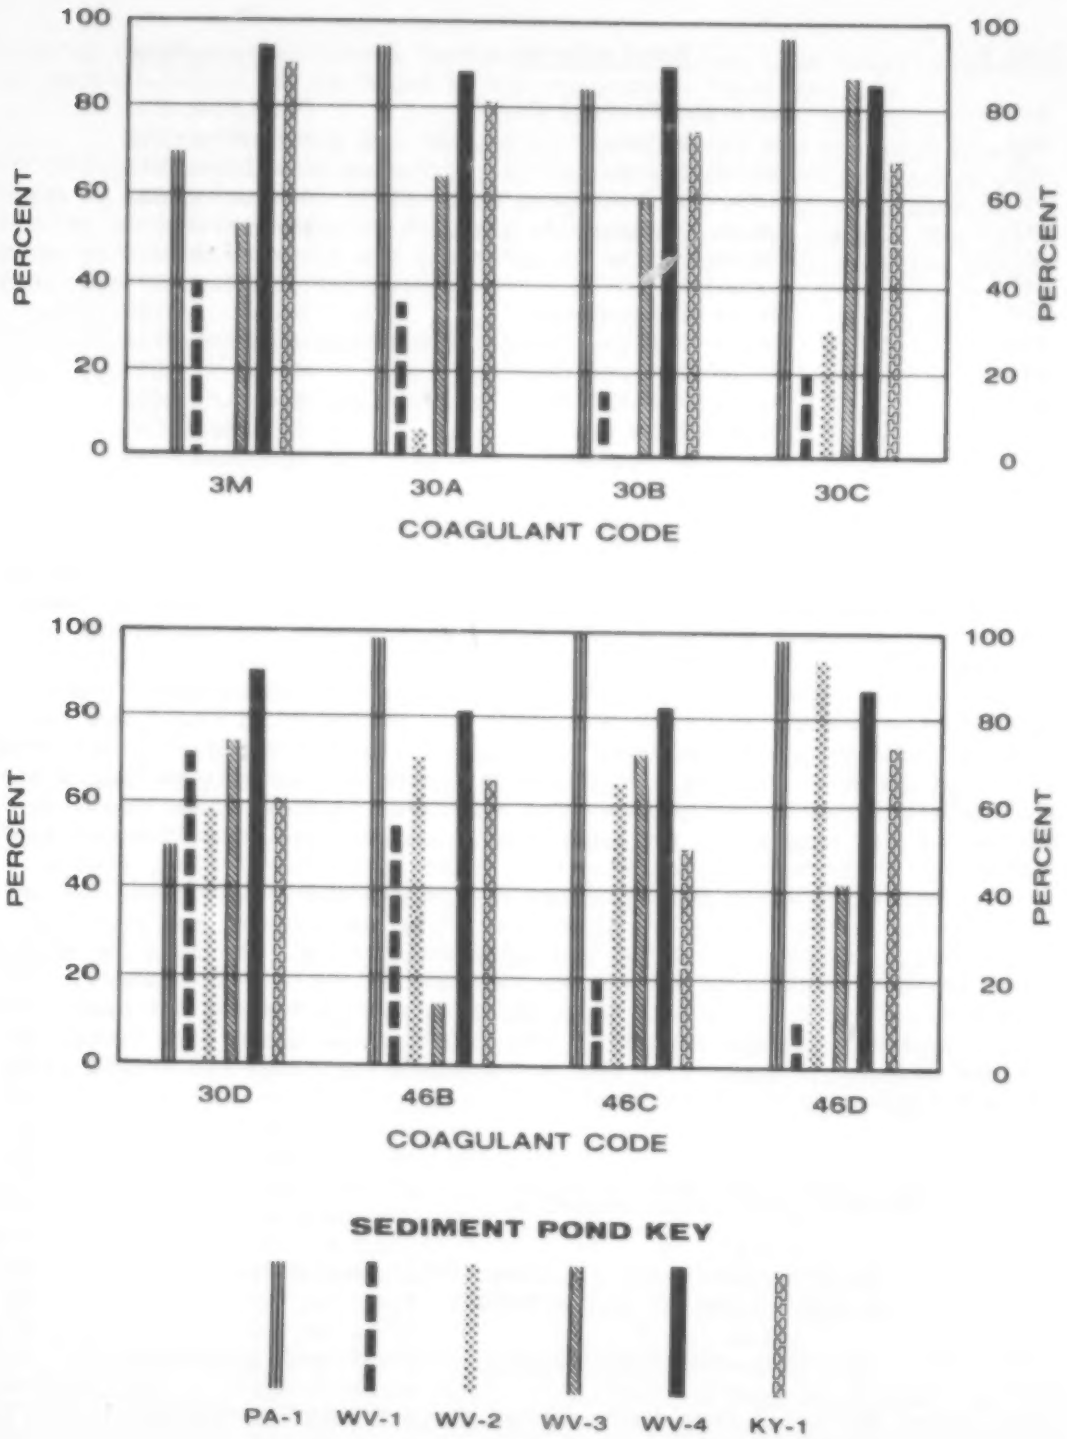


**Figure 41. Suspended solids removal by anionic coagulants.**

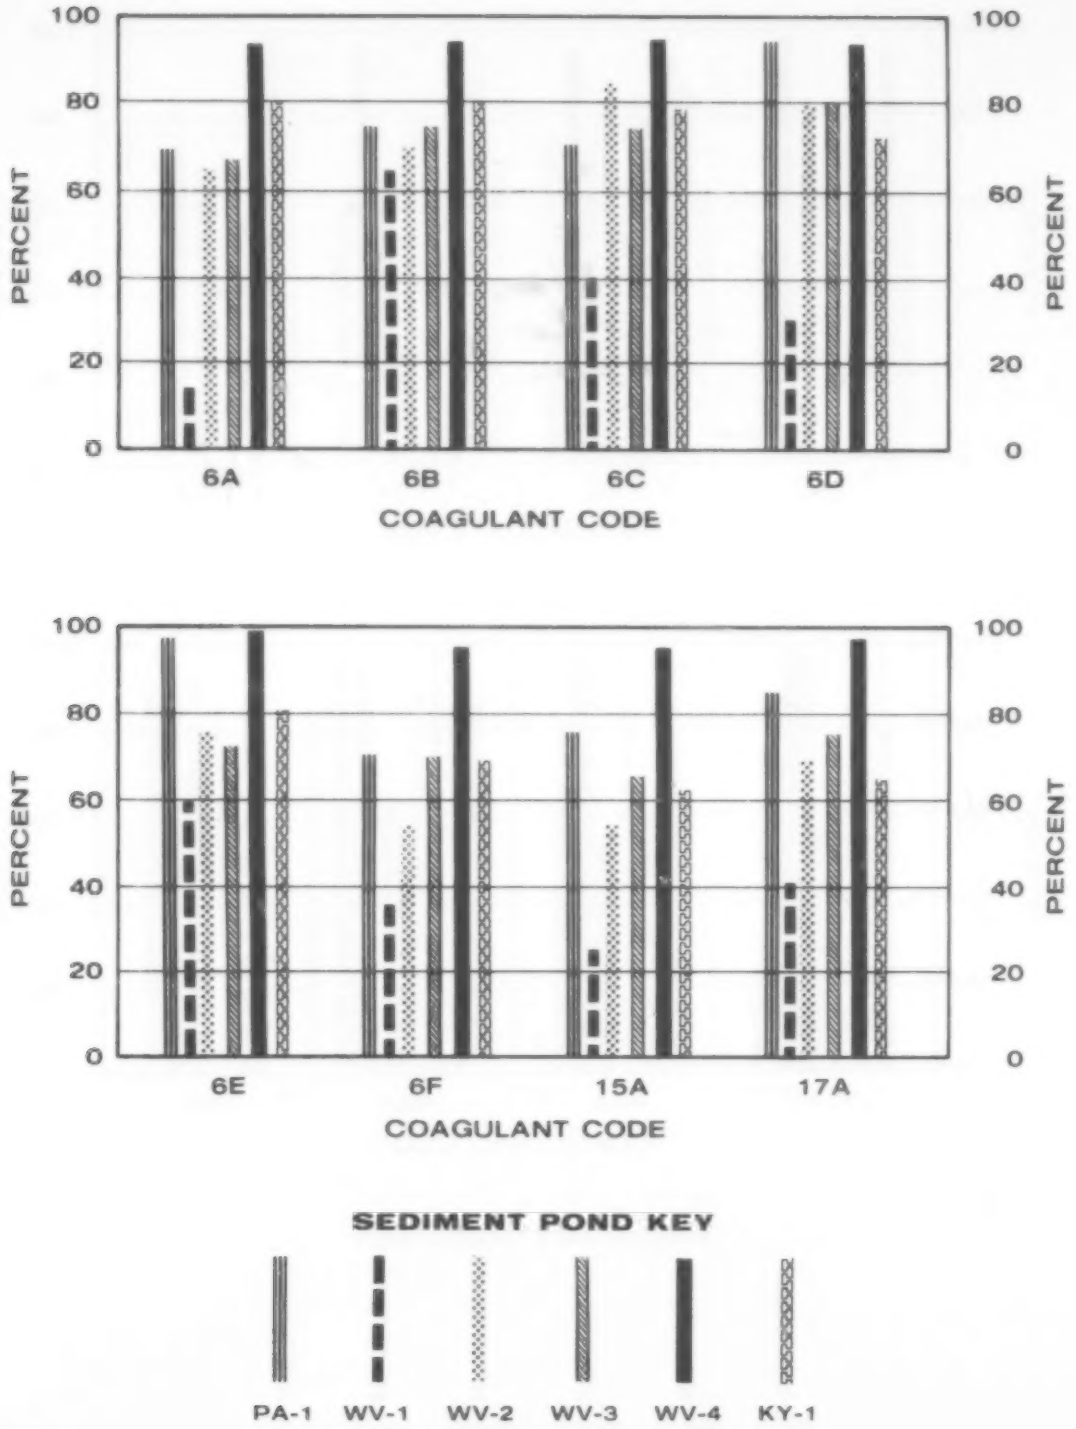


**Figure 42. Suspended solids removal by cationic coagulants.**

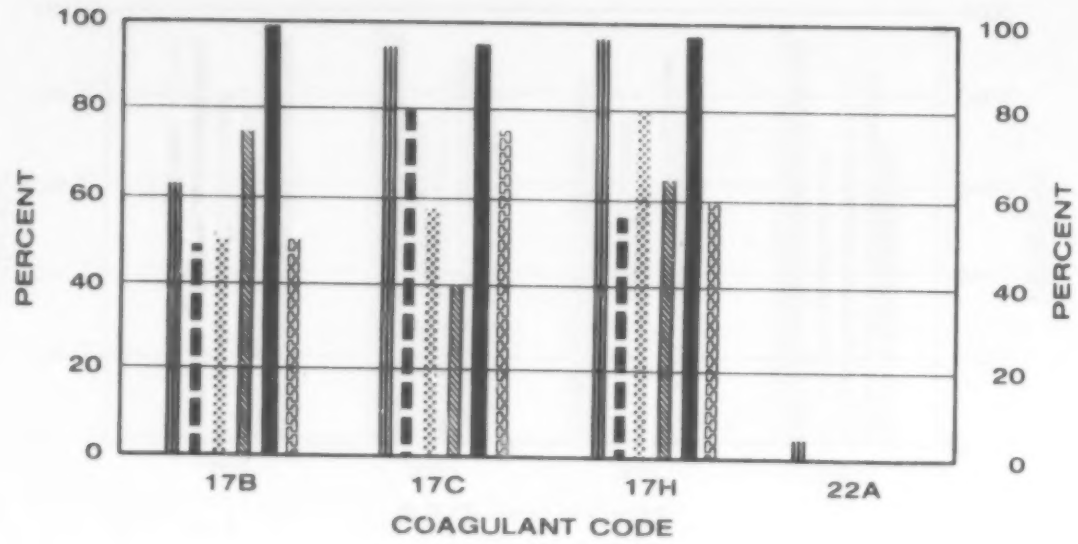


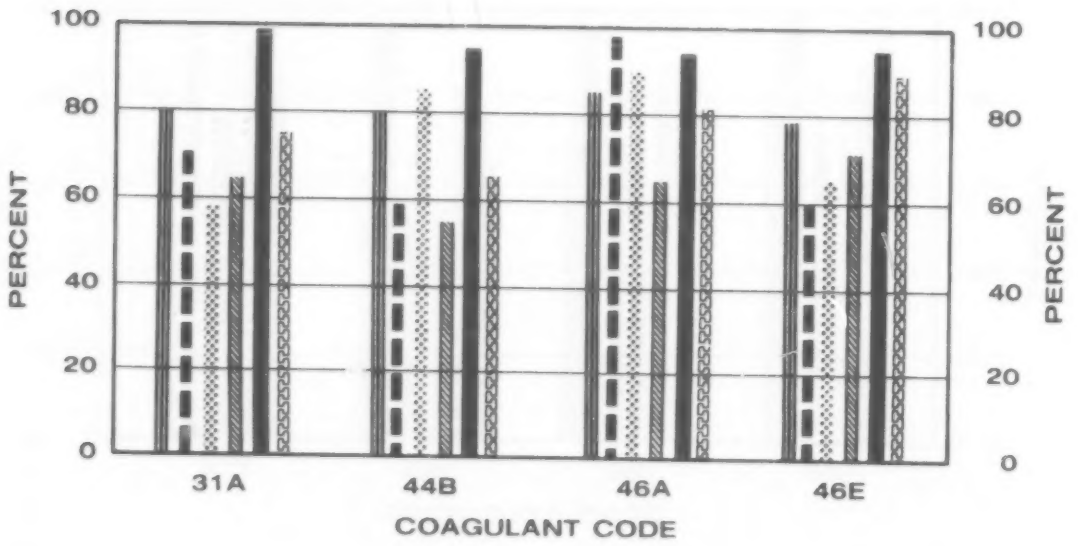


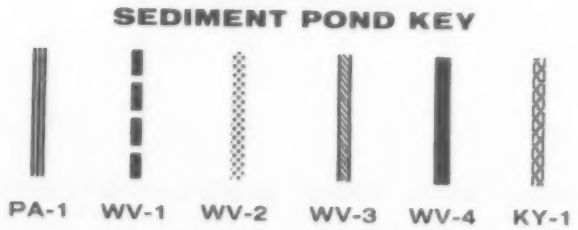


**Figure 42. (continued)**

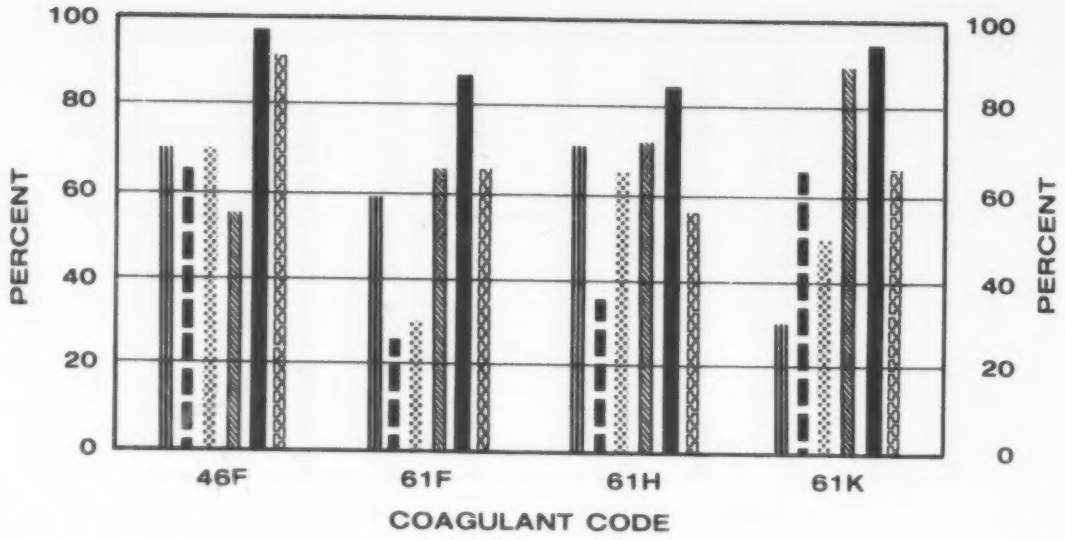


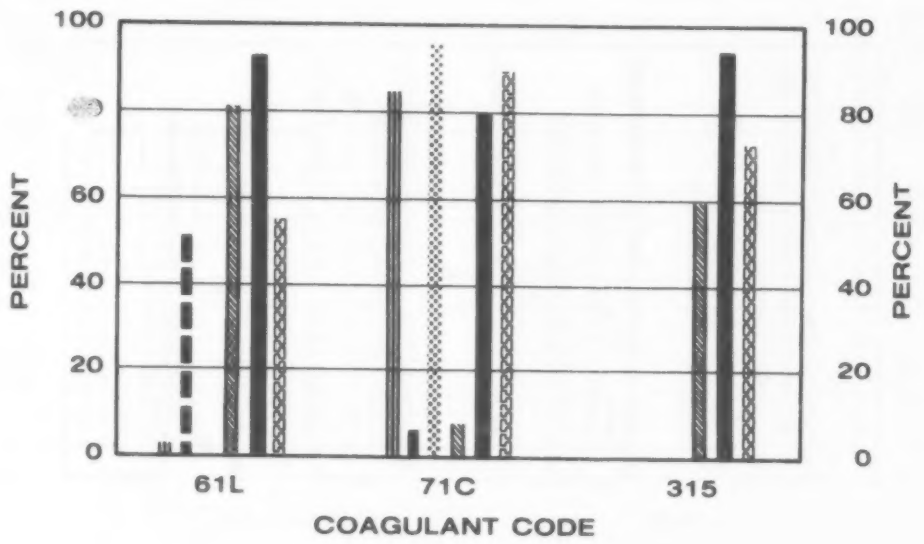


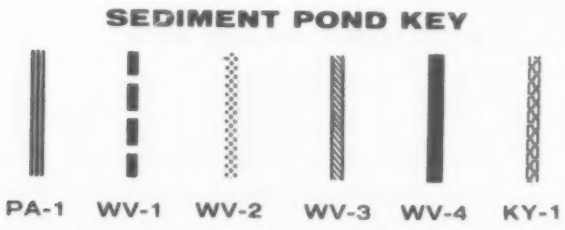


**Figure 42. (continued)**



best copy available

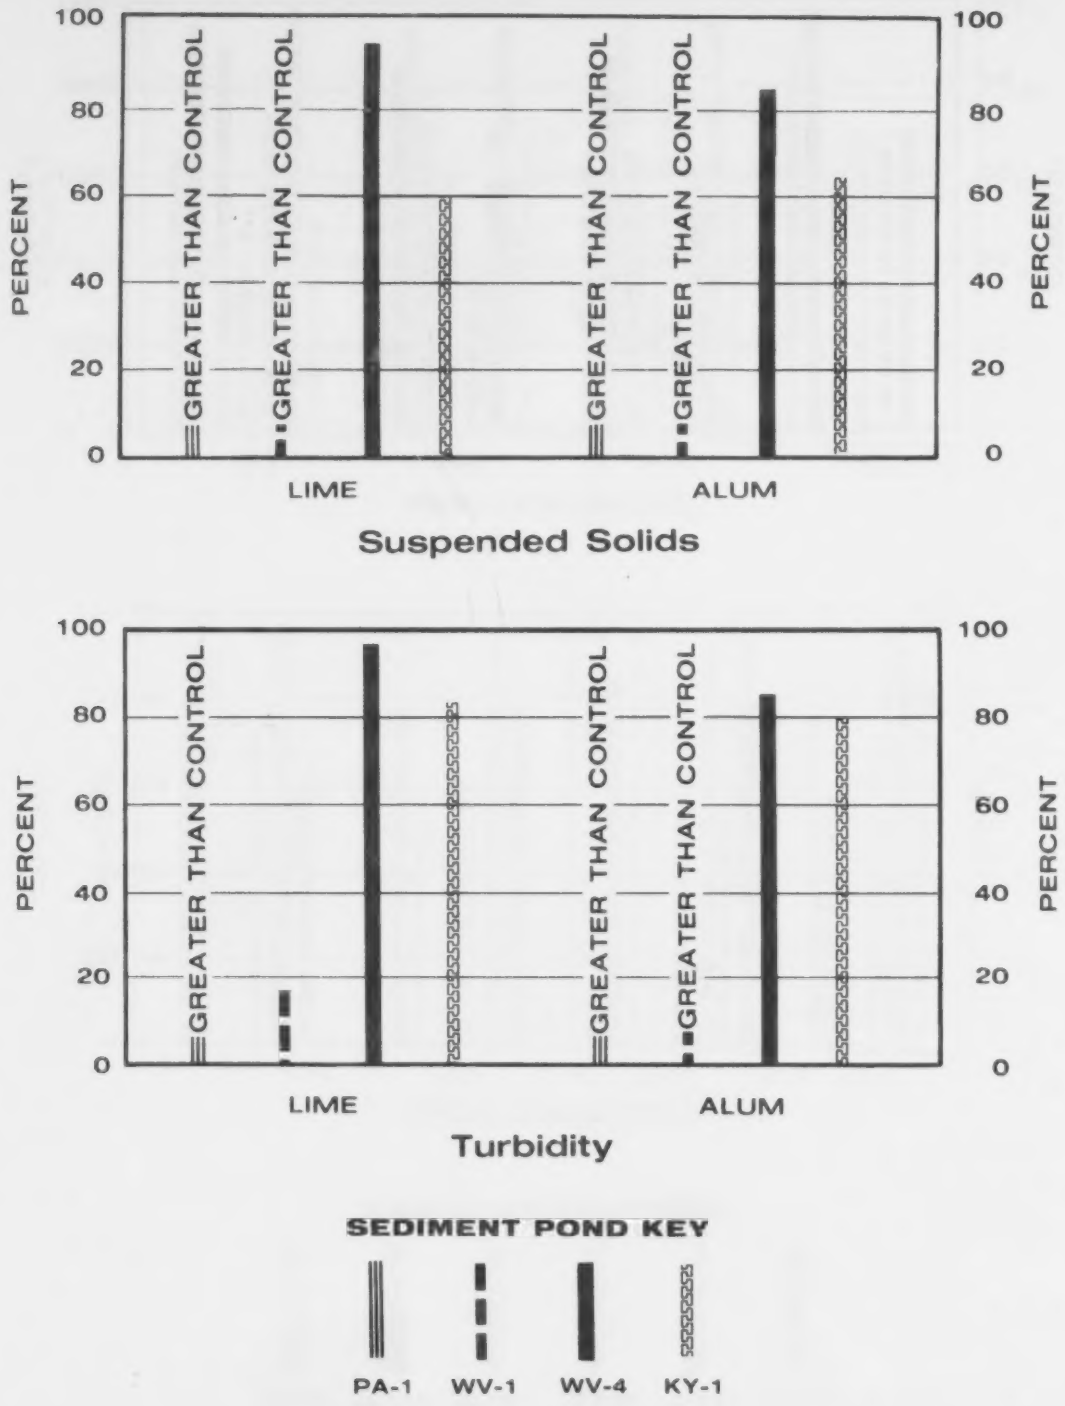


**Figure 43. Suspended solids and turbidity removal by lime and alum.**

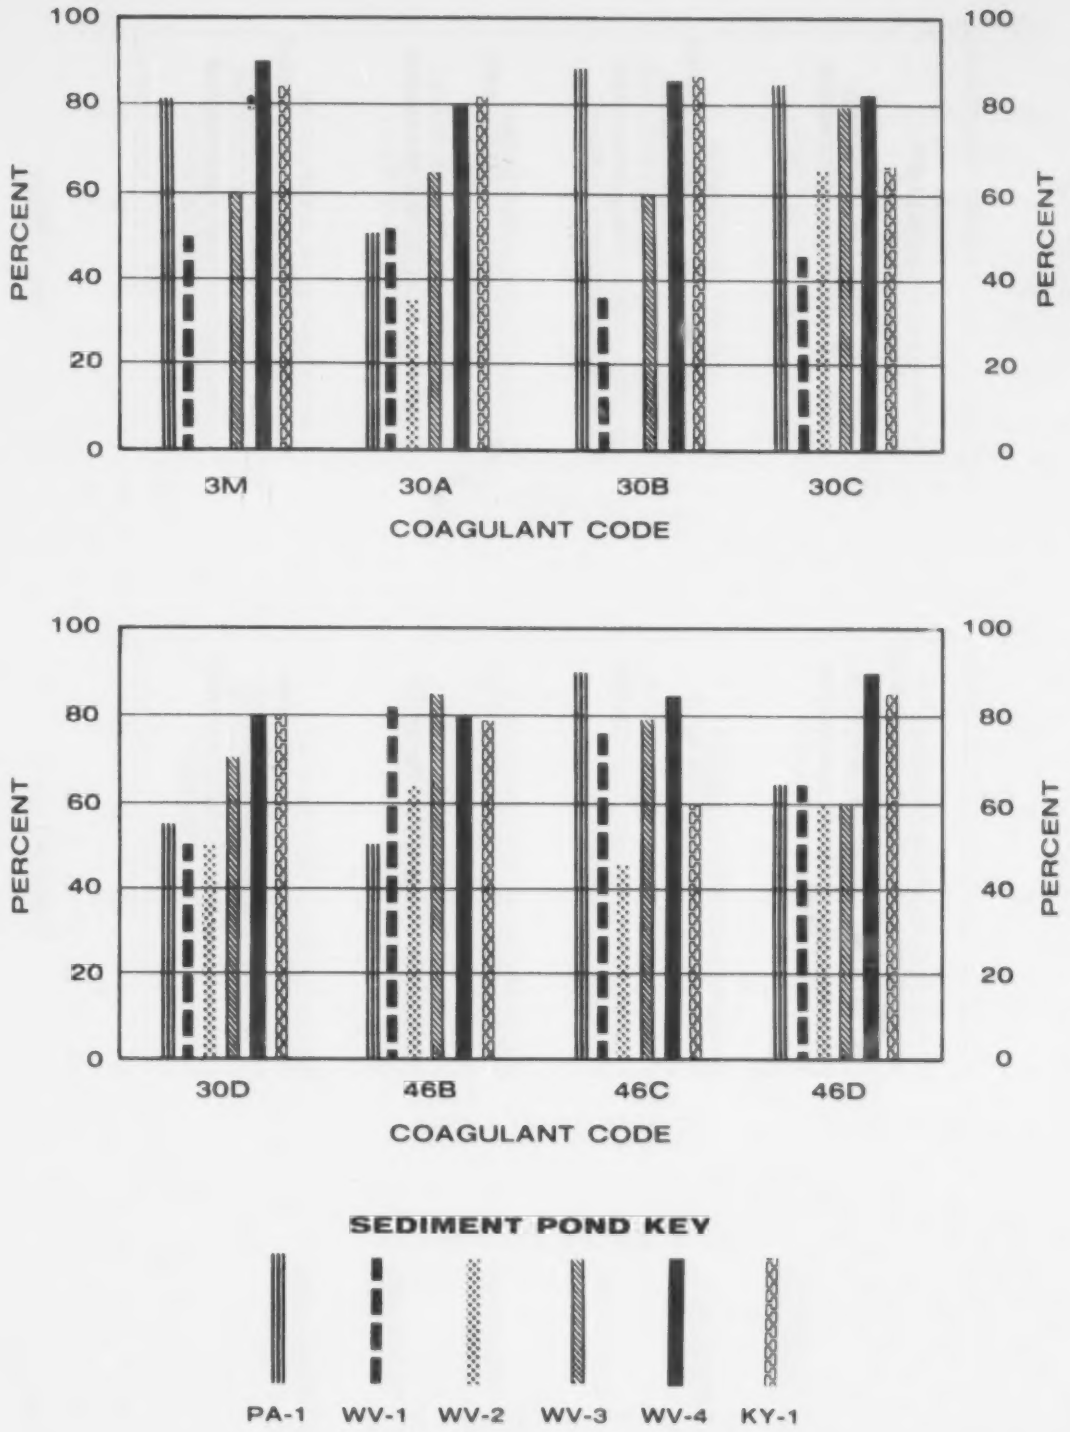


**Figure 44. Turbidity removal by anionic coagulants.**

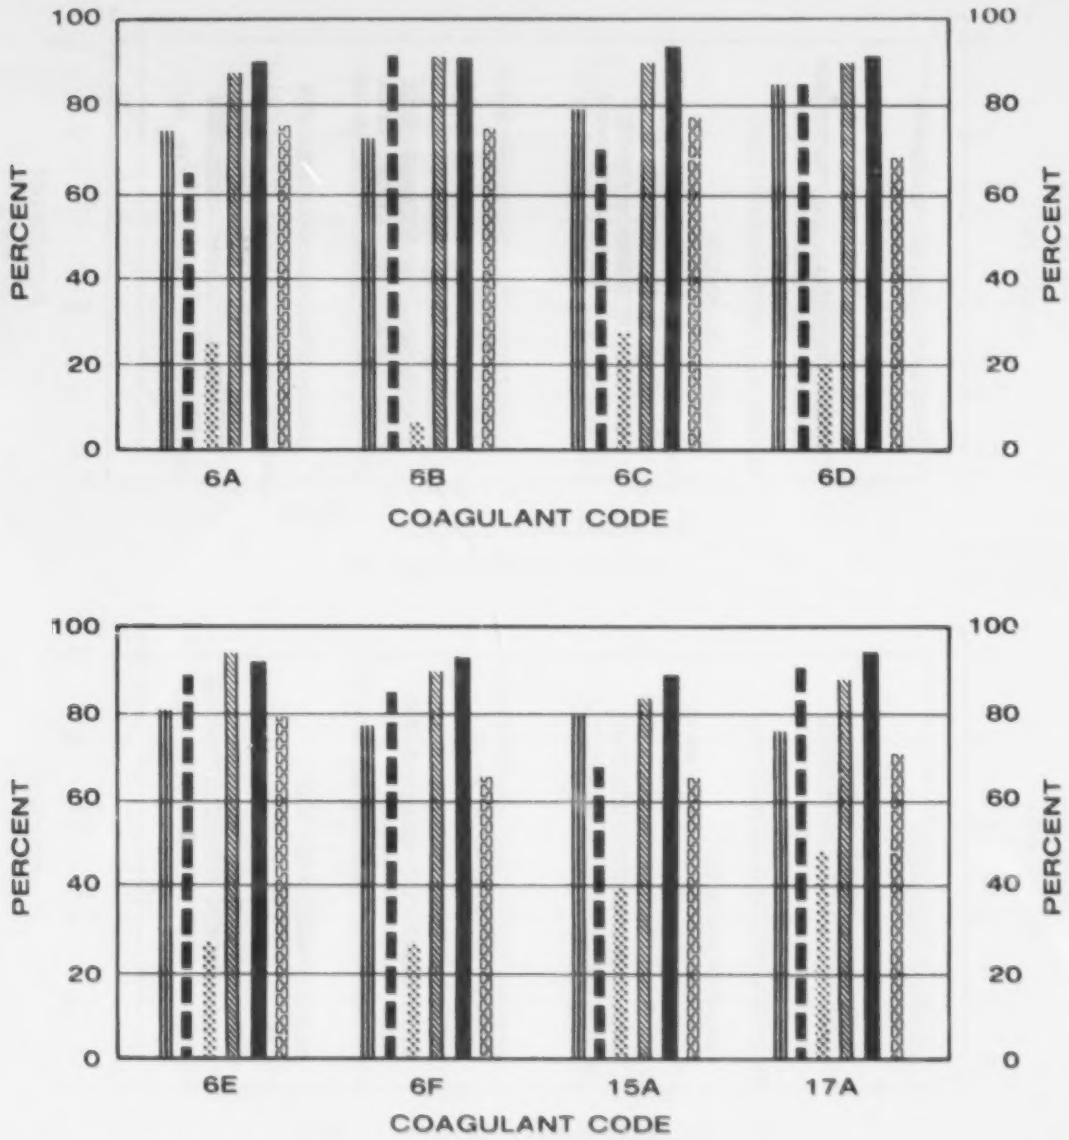


**Figure 45. Turbidity removal by cationic coagulants.**

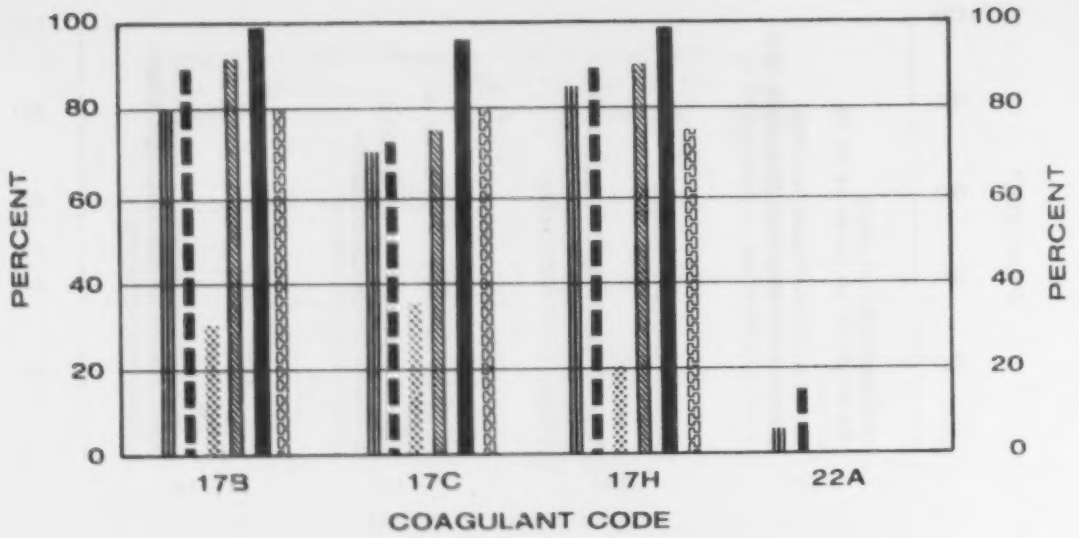


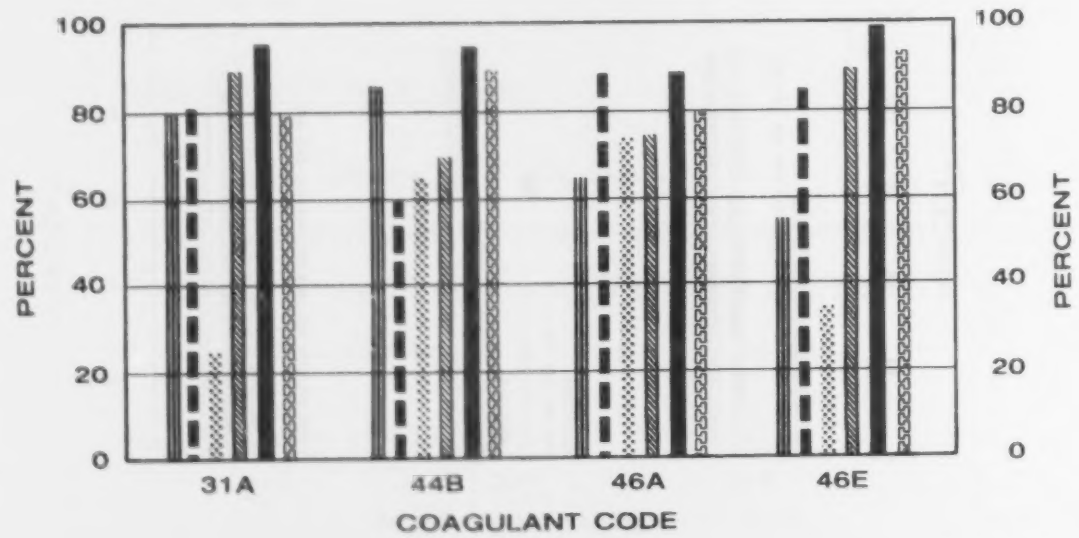


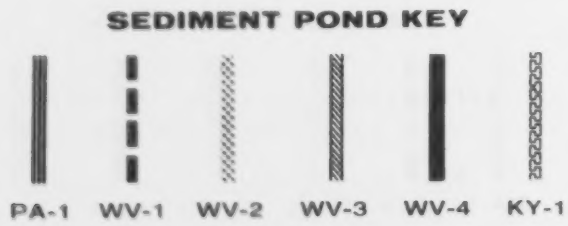


**Figure 45. (continued)**

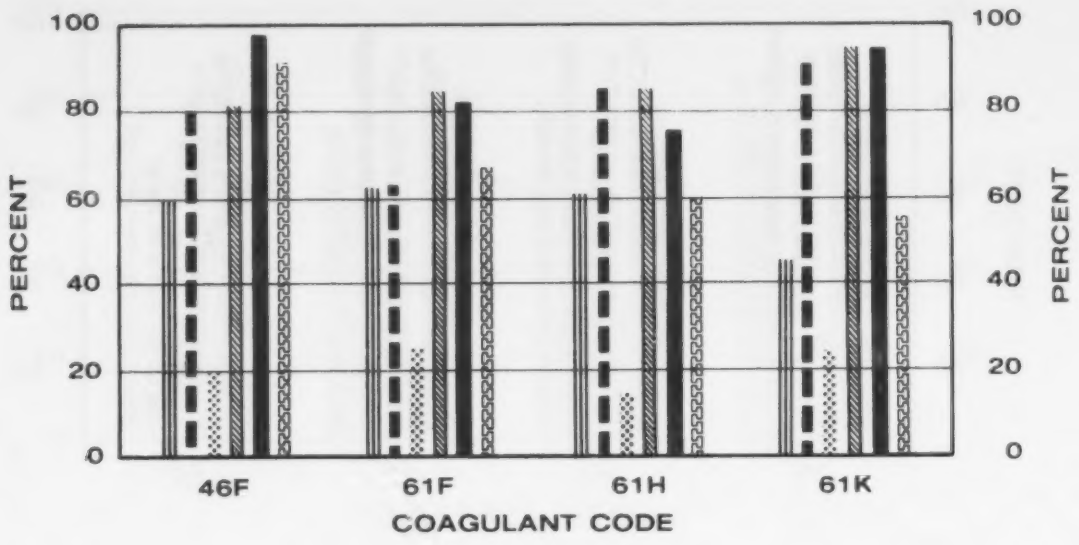


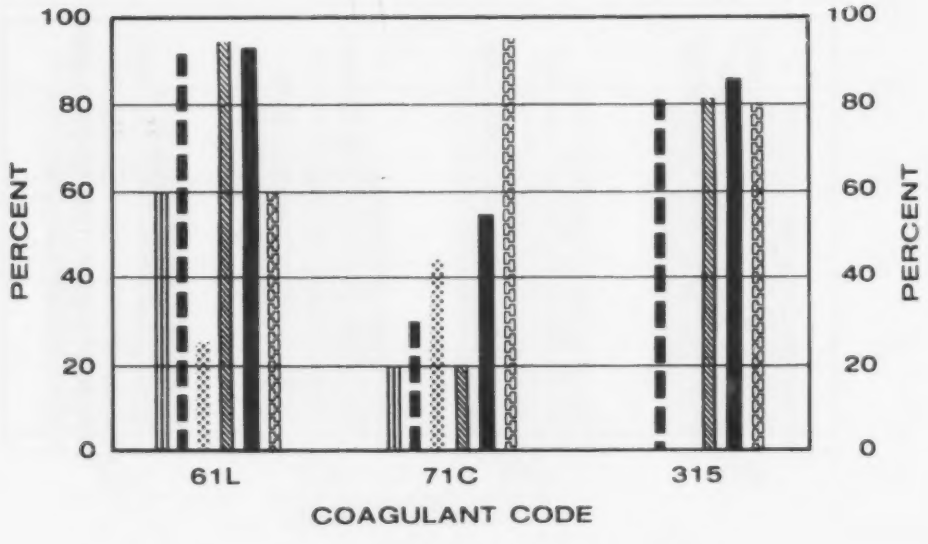


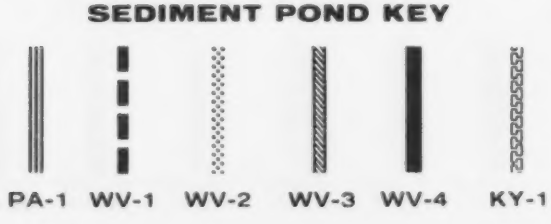


**Figure 45. (continued)**

- Coagulant 46B formed small-flocced particles with a 0.5 ppm dosage, medium-flocced particles with a 1.0 ppm dosage, and large-flocced particles with a 1.5 ppm dosage.
- Coagulant dosage had very little effect on pH.

Coagulation of WV-1 Influent

- Control sample and all coagulated samples had a sludge volume of 1-2%.
- All liquid coagulants formed small-flocced particles.
- All solid coagulants formed large-flocced particles.
- Increasing the coagulant dosage caused slight elevation of the pH.

Coagulation of WV-2A Influent

- All sludge volumes were less than 0.5%.
- Most liquid coagulants formed small-flocced particles.
- Most solid coagulants formed large-flocced particles.
- Coagulant dosage had very little effect on pH.

Coagulation of WV-3 Influent

- All sludge volumes were in the range of 2-4%.

Coagulation of WV-4 Influent

- Larger dosages of coagulant were required to cause coagulation and settling.
- Sludge volumes were approximately 2-5%.

- Although most coagulants removed large percentages of suspended solids and turbidity, most of the supernatants did not meet discharge limitations, using up to 5 ppm of coagulant.

- An additional test was performed using three coagulants at a higher dosage with a longer settling time, the results are listed in Table 18.

**TABLE 18. EXTENDED SETTLING TIME RESULTS**

| Coagulant | Dosage (mg/l) | Suspended solids (mg/l) 3 hr. | 24 hr. | % Removal of suspended solids after 24 hours |
|---|---|---|---|---|
| 315 | 5.0 | 44 | 18 | 98 |
| 315 | 10.0 | -- | 8 | 99 |
| 31A | 5.0 | 21 | 17 | 99 |
| 31A | 10.0 | -- | 16 | 99 |
| 46E | 5.0 | 48 | 23 | 98 |
| 46E | 10.0 | -- | 12 | 99 |

Coagulation of KY-1 Influent

- Sludge volumes were less than 1%.

The thirty-three coagulants tested consisted of eight anionic polymers, 23 cationic polymers, and alum and lime. The average percent removal of turbidity and suspended solids for the anionic polymers and the cationic polymers are listed in Table 19. The percent removal for alum and lime for the waters tested are listed in Table 20.

From these preliminary laboratory tests, a group of seven coagulants was chosen to be used in the bench-scale treatability tests. These seven were chosen based upon their turbidity and suspended solids removal ability. This group includes the coagulants listed in Table 21.

## TABLE 19. ANIONIC AND CATIONIC COAGULANT REMOVAL SUMMARY

| | Anionic percent removal | | Cationic percent removal | |
|---|---|---|---|---|
| | turb | tss | turb | tss |
| PA-1 | 70.7 | 86.4 | 66.5 | 70.1 |
| WV-1 | 56.5 | 33.5 | 79.7 | 49.1 |
| WV-2 | 53.0 | 53.5 | 29.9 | 67.5 |
| WV-3 | 78.5 | 58.4 | 83.7 | 65.7 |
| WV-4 | 84.1 | 87.4 | 90.4 | 94.3 |
| KY-1 | 78 | 70.8 | 76.1 | 72.4 |

## TABLE 20. TURBIDITY AND SUSPENDED SOLIDS REMOVAL FOR ALUM AND LIME

| | Alum percent removal | | Lime percent removal | |
|---|---|---|---|---|
| Test water | turb | tss | turb | tss |
| PA-1 | 0 | 0 | 0 | 0 |
| WV-1 | 0 | 0 | 16 | 0 |
| WV-4 | 86 | 85 | 96 | 94 |
| KY-1 | 80 | 65 | 84 | 60 |

## TABLE 21. SELECTED COAGULANTS FOR BENCH SCALE TESTING

| | Avg. % removal | |
|---|---|---|
| Code # | turb | tss |
| 6E | 71.2 | 80.5 |
| 17H | 76.3 | 75.8 |
| 31A | 75.3 | 74.8 |
| 44B | 77.7 | 73.8 |
| 46A | 78.3 | 85.1 |
| 46D | 71.2 | 67.0 |
| 315 | 82.5 | 76.0 |

Step Three - Bench-Scale Treatability Study--

The purpose of step-three testing was to determine the optimum dosage of each of the seven coagulants for maximum turbidity and suspended solids removal. The first series of tests to determine the optimum dosage

was performed at 21° C. After determining the optimum dosage at this temperature, the test was performed again; however, this time at 4° C to simulate winter conditions to observe the effect of temperature on the coagulation efficiency.

The laboratory procedure for these tests was identical to that described for step two testing. The results of the testing for step three are listed by dosage in Table A-4 and the percent removal at optimum dosage are listed in Table A-5. A summary of the average percent removals of turbidity and suspended solids for each coagulant is as follows:

**TABLE 22. COAGULANT EFFICIENCY**

| Coagulant | Avg. % removal turb | tss |
|---|---|---|
| Magnifloc 587C | 81.1 | 88.0 |
| M-502 | 78.9 | 83.4 |
| Amerifloc 485 | 78.5 | 77.5 |
| Hercofloc 812 | 82.7 | 90.3 |
| Hercofloc 831 | 74.6 | 75.7 |
| Polyfloc C | 81.8 | 87.8 |
| Superfloc 315 | 75.6 | 78.9 |

An additional important aspect of coagulant usage is the dosage required to attain the maximum removal. Table 23 lists the average optimum dosage required for each coagulant, as determined in the bench-scale testing.

**TABLE 23. AVERAGE OPTIMUM DOSAGE (mg/l)**

| Coagulant | Turb removal | Tss removal |
|---|---|---|
| Magnifloc 587C | 3.6 | 3.5 |
| M-502 | 3.3 | 3.6 |
| Amerfloc 485 | 3.25 | 3.0 |
| Hercofloc 812 | 3.8 | 2.9 |
| Hercofloc 831 | 2.4 | 2.2 |
| Polyfloc C | 3.1 | 4.0 |
| Superfloc 315 | 4.8 | 4.0 |

The following overall conclusions were reached as a result of the bench-scale testing:

- Cationic polymers were generally more effective than the anionic polymer.

- Magnifloc 587C performed efficient suspended solids removal of all test waters both at room temperature and at 4° C.

- M-502 performed efficient suspended solids removal of all test waters both at room temperature and at 4° C.

- Amerfloc 485 reduced the suspended solids of every water below discharge limitations except WV-3 at 4° C. A significant increase in suspended solids concentration was observed for WV-1 and WV-3 at 4 C using the 21° C optimum dosage.

- Hercofloc 812 sufficiently removed the suspended solids from all waters at 21° C, but did not meet discharge limitations at 4° C for WV-1, WV-3, and KY-1 using comparable dosages. Suspended solids concentration increased at 4° C for all waters other than WV-4.

- Hercofloc 831 sufficiently removed the suspended solids at 21° C for all waters except WV-4 and KY-1.

- Superfloc 315 sufficiently removed the suspended solids from all waters at 21° C, but did not meet discharge limitations at 4° C for WV-1, using the same dosage. Suspended solids concentration increased at 4° C for all waters.

- Polyfloc C exhibited less suspended solids removal efficiency at 4° C and did not meet discharge limitations for WV-1, WV-2, WV-4, and KY-1 at the lower temperature.

- Optimum coagulant dosage varies with characteristics of the subject water.

- Coagulant dosage will generally increase with the colloidal suspended solids concentration.

- Sludge generated during coagulation will be a function of the amount of solids in the water; however, under laboratory conditions, a significant amount of sludge could not be produced to obtain any data to characterize coagulants.

- Table 24 indicates the effect of water temperature and suspended solids removal of the control and two best performing coagulants.

## TABLE 24. EFFLUENT SUSPENDED SOLIDS AT CONTROLLED TEMPERATURES

| Water | Polymer | Dosage (mg/l) | Suspended solids (mg/l) @ 21°C | Suspended solids (mg/l) @ 4°C |
|---|---|---|---|---|
| PA-1 | Control | -- | 32 | 65 |
| | Magnifloc 587C | 0.5 | 1 | 7 |
| | M-502 | 1.0 | 1 | 11 |
| WV-1 | Control | -- | 29 | 64 |
| | Magnifloc 587C | 1.0 | 17 | 20 |
| | M-502 | 3.0 | 7 | 29 |
| WV-2 | Control | -- | 28 | 10 |
| | Magnifloc 587C | 1.0 | 7 | 7 |
| | M-502 | 0.5 | 5 | 8 |
| WV-3 | Control | -- | 74 | 101 |
| | Magnifloc 587C | 5.0 | 14 | 12 |
| | M-502 | 3.0 | 27 | 13 |
| WV-4 | Control | -- | 1176 | 962 |
| | Magnifloc 587C | 6.0 | 12 | 3 |
| | M-502 | 6.0 | 11 | 16 |
| KY-1 | Control | -- | 186 | 70 |
| | Magnifloc 587C | 6.0 | 12 | 18 |
| | M-502 | 8.0 | 21 | 20 |

As a result of the preliminary and bench-scale treatability study, the following is a list of the seven tested coagulants in order of their overall performance:

1. Magnifloc 587C
2. M-502
3. Amerfloc 485
4. Hercofloc 812
5. Superfloc 315
6. Polyfloc C
7. Hercofloc 831

Step Four - Potential Environmental Impacts of Coagulant Use--

For each of the cationic coagulants used in the bench-scale testing, two potential sources of environmental impacts were studied. These were the supernatant or effluent of a pond in which the coaguiants were used, and the sludge generated from the flocculation and settling of the suspended matter in the pond.

Information relative to the environmental impacts of the coagulants mentioned above were concentrated on the highest dosages recommended for each polymer in this study; however, potential effects of at least one coagulant were studied for each of the six mine waters whether or not that particular coagulant was required in the highest concentration.

The primary sources of information for the sludge related environmental impacts were published information and data from various coagulant producers, and phone conversations with producers' research and development personnel. In addition to these sources, pond overflow impact data was extracted from analytical testing of the clarified mine waters obtained from the bench scale evaluations of optimum coagulant dosages.

Coagulants and Mine Waters Studied--As stated previously, the environmental impacts of six separate cationic coagulants were studied with respect to their maximum optimum dosage on six separate mine waters. Specific environmental impact data was analyzed for the following systems: (1) 3.0 mg/l of M-502 added to mine water WV-1; (2) 3.0 mg/l of Superfloc 315 added to mine water WV-2; (3) 7.0 mg/l of Hercofloc 812 added to mine water WV-3; (4) 10.0 mg/l of Superfloc 315 added to mine water WV-3; (5) 6.0 mg/l of Amerfloc 485 added to mine water WV-4; (6) 6.0 mg/l of Magnifloc 587 C added to mine water WV-4; (7) 1.5 mg/l of Polyfloc C added to mine water PA-1; (8) 6.0 mg/l of Polyfloc C added to mine water KY-1; and (9) 8.0 mg/l of M-502 added to mine water KY-1.

General Toxicity and Stability Characteristics--

Of the six cationic polymers listed in this section, four are in liquid form and two are in solid form. The two solid polymers are Polyfloc C and Hercofloc 812. All of these are completely soluble in water and all are stable within the pH ranges of 3.5 to 8.0. It should be noted that all mine waters tested in this study were within the pH range of 5.6 to 7.4, and therefore no polymer stability problems were encountered. Three of the four liquid polymers, Amerfloc 485, M-502 and Magnifloc 587C, will freeze at -5° C in the concentrated form and therefore their use may be limited in cold weather areas unless a heated building or other facility is provided.

While most of these polymers exhibit a BOD of about 100,000 mg/l and COD of about 200,000 mg/l in the concentrated form, they are normally added in such small concentrations (less than 10.0 mg/l) that their effect on BOD or COD in the total mine water system is negligible. In addition, these materials exhibit very low toxicity characteristics. For instance, the lethal dosage of M-502 on white rats is 16.0 grams per kilogram of animal weight when injected directly into the stomach. This is approximately 10% of the toxicity of a concentrated salt solution injected into the same animal.

With the exception of Polyfloc C for which no information could be found, all polymers studied have received EPA approval for usage in potable water. However, the EPA dosage limit for approval of Hercofloc 812 was exceeded in the findings for optimum coagulant dosage.

Environmental Impact of Sludge Containing Polymer--

In the coagulant/mine water systems which were studied, the majority of the various polymers injected in the laboratory-scale treatment tests became adhered to floc particles and thus settled out with the sludge. These polymers remain in a stable condition in this sludge as long as it remains untouched in the bottom of the settling basin.

Since polymers are all extremely long chained organic molecules, the introduction of any sludge removing device into the system will shear these molecules, thus causing a significant degree of instability. With the proper care and initiation of good sludge disposal practices, the impact of this phenomenon on the environment can be minimal. For instance, if a settling pond is full of sludge, the top layer of water should be pumped off and no discharge be allowed from the pond while the sludge is being pumped out and hauled away. This may require the re-routing of the normal influent stream into another settling basin until the sludge removal operation is completed.

If only one settling pond exists, it should be baffled so that sludge cannot accumulate on the effluent end of the pond. That way, when the influent side of the pond becomes filled with sludge, the influent water stream can be repiped to the other section temporarily while the sludge from the first section is pumped out. The baffle should be located one third of the distance from the inlet to the outlet.

Even if these sludges would break down and return to the suspended solids form during pond cleanout periods, the suspended solids concentration in the lagoon effluent should not be higher than if no coagulant was added to the system at all unless the pond had been completely overrun by sludge before an attempt was made to pump it out. In that case, lack of retention time in the pond would result in high suspended solids concentrations in the effluent no matter how well the polymer aided settling time.

One final comment is that all five coagulant producers stressed that their polymer, if broken down by strong shearing action, would not form smaller toxic type molecules that could harm the environment in any way.

Environmental Impact of Polymer in Pond Overflows--

Each of the six cationic polymers mentioned previously are completely soluble in water. Therefore, whatever amount of the polymer that does not attach itself to the floc will be present in the pond overflow as dissolved solids, COD, or soluble organic carbon. Normally, this represents less than 10% of the total coagulant dosage added to the mine water stream, therefore it is usually not too significant a quantity.

To determine what impact polymer addition has on the analyses of certain pond effluents without knowing the exact chemical structure of each coagulant is most difficult; however, to obtain some type of specific environmental impact data for the coagulant systems discussed under the sub-title "Bench-Scale Treatability Test", the study began by dosing deionized water with the same concentrations of polymers as indicated in these tests. The deionized water containing the polymers was analyzed for total dissolved solids (TDS), total organic carbon (TOC), and chemical oxygen demand (COD). The results were as follows:

| Coagulant | Dosage (mg/l) | TDS (mg/l) | TOC (mg/l) | COD (mg/l) |
|---|---|---|---|---|
| M-502 | 8.0 | 1 | 6.4 | 1 |
| Superfloc 315 | 10.0 | 36 | 5.4 | 8.0 |
| Hercofloc 812 | 7.0 | 18 | 6.1 | 8.0 |
| Magnifloc 587C | 6.0 | 72 | 9.8 | 1 |
| Amerfloc 485 | 6.0 | 1 | 5.8 | 1 |
| Polyfloc C | 6.0 | 22 | 5.8 | 8.0 |

These results indicate that M-502 and Amerfloc 485 do not add dissolved solids to the water, and that M-502, Amerfloc 485, and Magnifloc 587C do not add COD to the water. Since there are at most 2.0 mg/l of TOC in this deionized water, all polymers contributed in that respect.

Next, the supernatant samples produced from the optimum polymer dosages were compared to the effluents of each mine water without polymer

added (control samples), with respect to dissolved solids, suspended solids and TOC. The results are summarized below.

System #1: 3.0 mg/l of M-502 added to WV-1

| | Effluent Analysis | |
|---|---|---|
| | Control | With Polymer |
| TSS (mg/l) | 29 | 7 |
| TDS (mg/l) | 670 | 606 |
| TOC (mg/l) | 6.2 | 7.8 |

Conclusion: Calgon M-502 added a slight amount of non-toxic organics to the WV-1 pond effluent stream, but more than compensated for this removal of most of the suspended solids.

System #2: 3.0 mg/l of Superfloc 315 added to WV-2

| | Effluent Analysis | |
|---|---|---|
| | Control | With Polymer |
| TSS (mg/l) | 28 | 14 |
| TDS (mg/l) | 48 | 96 |
| TOC (mg/l) | 6.1 | 8.3 |

Conclusion: American Cyanamid Superfloc 315 added 2.0 mg/l of non-toxic organics to the WV-2 pond effluent, and also added some dissolved solids, but again reduced the suspended solids to one half of that obtained without the use of this polymer.

System #3: 7.0 mg/l of Hercofloc 812 added to WV-3

| | Effluent Analysis | |
|---|---|---|
| | Control | With Polymer |
| TSS (mg/l) | 74 | 4 |
| TDS (mg/l) | 332 | 374 |
| TOC (mg/l) | 11 | 11 |

Conclusion: Hercules Hercofloc 812 added dissolved solids to the WV-3 pond overflow; however, the sharp drop in suspended solids makes the effluent more environmentally aesthetic. Probably a tradeoff of organics with more natural organics precipitating out while Hercofloc 812 added some to the overflow.

System #4: 10.0 mg/l of Superfloc 315 added to WV-3

| | Effluent Analysis | |
|---|---|---|
| | Control | With Polymer |
| TSS (mg/l) | 74 | 12 |
| TDS (mg/l) | 332 | 376 |
| TOC (mg/l) | 11 | 4.7 |

Conclusion: Same as System #3 except that American Cyanamid Superfloc 315 pulled down a considerable amount of natural organics into the sludge.

System #5: 6.0 mg/l of Amerfloc 485 added to WV-4

| | Effluent Analysis | |
|---|---|---|
| | Control | With Polymer |
| TSS (mg/l) | 1176 | 10 |
| TDS (mg/l) | 236 | 164 |
| TOC (mg/l) | 26 | 8.5 |

Conclusion: Drew Amerfloc 485 caused a tremendous improvement in each case with respect to the environmental impact of the pond overflow.

System #6: 6.0 mg/l of Magnifloc 587C added to WV-4

| | Effluent Analysis | |
|---|---|---|
| | Control | With Polymer |
| TSS (mg/l) | 1176 | 12 |
| TDS (mg/l) | 236 | 146 |
| TOC (mg/l) | 26 | 11 |

System #7: 1.5 mg/l of Polyfloc C added to PA-1

| | Effluent Analysis | |
|---|---|---|
| | Control | With Polymer |
| TSS (mg/l) | 32 | 6 |
| TDS (mg/l) | 392 | 364 |
| TOC (mg/l) | 5.9 | 4.3 |

System #8: 6.0 mg/l of Polyfloc C added to KY-1

| | Effluent Analysis | |
|---|---|---|
| | Control | With Polymer |
| TSS (mg/l) | 186 | 14 |
| TDS (mg/l) | 264 | 238 |
| TOC (mg/l) | 12 | 11 |

Conclusions for systems 5, 6, 7, and 8 are similar.

System #9: 8.9 mg/l of M-502 added to KY-1

| | Effluent Analysis | |
|---|---|---|
| | Control | With Polymer |
| TSS (mg/l) | 186 | 21 |
| TDS (mg/l) | 264 | 248 |
| TOC (mg/l) | 12 | 15 |

Conclusion: Calgon M-502 added 3.0 mg/l of TOC to the pond overflow for KY-1 with very little effect on environmental impact for this small amount of non-toxic organics.

Summary--

One must realize that the true environmental impact can not be measured from laboratory data. A field analysis of impact on an actual ecosystem must be performed to conclusively indicate the impact of coagulant usage. Preliminary indications are, however, that environmental impact, if any, will be slight.

## The Application of Coagulant Usage in Suspended Solids Removal

In order to make a decision regarding the usage of coagulants to assist in the removal of suspended solids, several items must be considered including a laboratory treatability analysis to determine coagulant optimum dosage, an economic analysis to determine feasibility of coagulant treatment, and an engineering design of the method of applying the coagulant to the pond.

Laboratory Treatability Analysis--

A laboratory analysis of a sample of water to be treated is an integral part of the design process. Several basic steps are required:

1. A coagulant screening process must be performed to determine the most applicable products. The list of thirty-three coagulants previously used for the preliminary study may be consulted in conducting this review. Results have shown that a cationic liquid coagulant will give desirable results and may be used as a basis for elimination.

2. A preliminary laboratory analysis should be performed to determine the range of applicability of each coagulant chosen during step one screening. The laboratory procedure described in the previous section may be utilized for this preliminary analysis.

3. After determining a group of the most successful coagulants, during preliminary testing, a bench-scale treatability study should be performed to determine the dosage at which maximum suspended solids removal will occur. This can be performed by using the same laboratory procedure as described in step two with a variation of dosages. The data from this step should be plotted on graph paper to display the relationship between percent removal and coagulant dosage. From this graph, the desired dosage of coagulant may be picked depending upon the amount of suspended solids removal required to comply with the effluent limitations.

4. As a final laboratory test, a study should be performed to determine the effect of cold weather on coagulant effectiveness by simulating winter conditions in the laboratory. This can be accomplished by using a cold water bath to maintain low temperatures in the reaction vessels.

After final laboratory analysis is complete, a complete report of the findings should be compiled along with recommendations generated during the study.

Economic Feasibility--

The second phase of coagulant review entails the economic feasibility of treatment. Detailed cost data should be obtained from the manufacturer of the selected coagulants. After receiving this data, a cost comparison should be performed on a unit basis of flow rate. For example, Table 25 is a summary cost comparison of the seven coagulants tested in

the previous laboratory bench-scale treatability study. Table 25 was generated by computing the amount of required coagulant for a flow rate of .0283$m^3$/sec (1 CFS). It is interesting to observe that the two most effective coagulants were also the least expensive. The economic feasibility analysis should also be done to determine the costs associated with the hardware of the coagulant addition system.

Engineering Design of Coagulant Addition Systems--

As was previously detailed in the section discussing the theory of suspended solids removal, the process of coagulation consists of two separate phases: 1) chemical addition with rapid mixing and 2) flocculation during which a very slow mix of the treated water takes place to allow for particle aggregation. The method of chemical addition depends upon the nature of the coagulant; i.e., whether it is a solid powder or a liquid.

**TABLE 25. COST OF COAGULANT USAGE**

| Coagulant | Unit cost | Dosage (mg/l) | Cost/day |
|---|---|---|---|
| Magnifloc 587C | $ .34/lb. | 3.5 | $ 6.42 |
| M-502 | $ .45/lb. | 3.6 | $ 8.74 |
| Amerfloc 485 | $1.00/lb. | 3.0 | $16.18 |
| Hercofloc 812 | $2.60/lb. | 2.9 | $40.68 |
| Hercofloc 831 | $2.40/lb. | 2.2 | $28.48 |
| Polyfloc C | $1.45/lb. | 4.0 | $31.29 |
| Superfloc | $ .48/lb. | 4.0 | $10.36 |

If a solid coagulant is used, a stock solution must be prepared as an initial step. A typical system for makeup and metering of a coagulant solution utilizes a platform scale (0 - 60 lbs minimum), with the container of powder attached to a 1890 liter (500 gal) make-up tank by a vacuum hose, through which the powder is fed. This stock solution is

usually prepared at a concentration from 0.25 - 0.5% by weight with clean water at near normal pH. An increased temperature will help facilitate the dissolution of the powder, but should never exceed 40.5° C (105° F). Water is added to the make-up tank and a mixer (3/4 hp) agitates the solution for about 30 minutes. This mixture is then pumped to a 3790 liter (1000 gal) holding tank.

Actual addition of the solid coagulant stock solution should be controlled by a metering pump to ensure proper dosage. A variable speed, corrosion resistant, positive displacement pump is recommended. Prior to addition to the waste stream, a second dilution (10:1) should take place. This can be accomplished with a dilution tee immediately after the pump. A length of pipe sufficient to facilitate mixture (100-pipe diameters) should be used between the tee and the point of addition. All equipment should be stainless steel, fiberglass, or plastic wherever possible to avoid clogging and/or corrosion. Care must be taken to maintain clean fixtures.

For the addition of a liquid product, a transfer pump, mixing tank, and equipment for final dilution are used. This process may be operated manually or automatically, depending on whether suitable controls are installed. Since most surface mine sedimentation ponds are located in relatively remote areas, the manual method of addition is recommended. A batch solution of liquid coagulant is prepared in the mixing tank at a 0.25 - 0.5% concentration. If electricity and a water supply is available at the site, then a system identical to the powder stock solution addition system, using a metering pump and dilution tee, should be used. If no electricity is available, a gravity feed system should be designed whereby a preset volume of diluted coagulant solution is allowed to drain from the batch-mix tank.

The actual metering of the coagulant solution to the stream may be accomplished by a combination of flow sensing device and variable speed metering pump. A device such as a parshall flume with level sensor should be designed to control the variable speed pump thereby delivering the correct dosage to the waste stream. In the event of a remote installation, an arrangement would be satisfactory in which a float-actuated valve, with the float located in the measuring flume, would control the amount of coagulant flowing from a gravity feed system.

When designing a sedimentation basin with a coagulant addition system, an allowance must be made for preliminary settling of large size particles. This can be accomplished by series settling ponds as described in the physical modifications section of this report. If preliminary sedimentation is not used, the larger particles may interfere with the coagulant and require chemical addition in excess of that amount actually required to settle the small particles. In the suspended solids removal process, the coagulant addition system should be located after the preliminary sedimentation basin.

After the addition of the coagulant, the water-coagulant mixture must go through a short phase of violent rapid mixture followed by a period of slow mix settling. As stated previously, because of the remote location of surface mine sedimentation ponds, these rapid mix and slow mix processes must be designed using non-mechanical techniques. If sufficient head is available, a waterfall step-method of rapid mixing is possible. By taking advantage of the natural fall in the stream channel, a series of steps constructed of rock or logs, causing a cascade effect from one step to the other, may be used to cause violent agitation of the treated stream. If sufficient head is not naturally avaiable, an artificial head could be made available by construction techniques.

The period of rapid mix should be followed by a period of flocculation during which the particles in solution are mixed very slowly to allow particle contact and aggregation. This phase must be designed to minimize turbulence as the flocculated particles can be fragile and susceptible to resuspension if disburbed. The actual flocculation process will take place in the final sedimentation basin with the slow mixing occurring in the first one-half of the basin. Baffles should be placed in the head end of the pond to cause the flow to be directed in a snake-like fashion as depicted in Figure 46. The final baffle should be placed so as to outlet the flow in the central portion of the pond. The remaining two-thirds of the basin would then be utilized for quiescent settling of the flocculated material. Extreme care must be taken in the design of outlet facilities so as to minimize turbulence and carry-over of the floc.

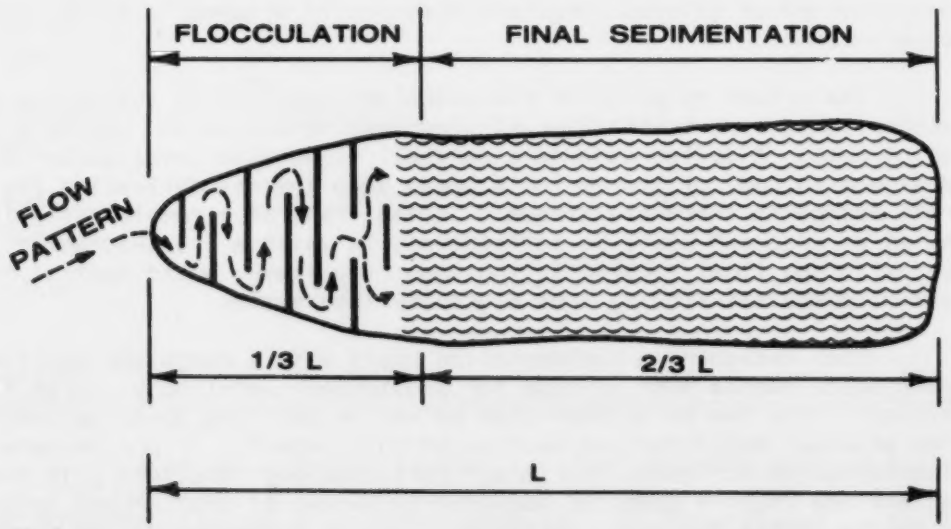


**Figure 46. Flocculation by baffle placement.**

## REFERENCES


1. Mallory, C. W., and M. A. Nawrocki. Containment Area Facility Concepts for Dredged Material Separation, Drying, and Rehandling, DACW 39-73-C-0136, Army Engineer Waterways Experiment Station, Columbia, Maryland, 1974.

2. Wilmoth, Roger C., Personal Communication. U.S. Environmental Protection Agency, Cincinnati, Ohio, 1979.

3. Weber, N. J., Jr., Physiochemical Processes for Water Quality Control. Wiley-Interscience: New York, 1972.

4. Nawrocki, M., and J. Pietrzak. Methods to Control Fine-Grained Sediments Resulting from Construction Activity. EPA-440/9-76-026, Columbia, Maryland, 1976.

5. Hazen and Sawyer, Engineers. Process Design Manual for Suspended Solids Removal. EPA 625/1-75-003a, U.S. Environmental Protection Agency, Washington, D.C., 1975.

6. Nawrocki and Pietrzak. op. cit.

7. Chen, Charng-Ning. Design of Sediment Retention Basins. National Symposium on Urban Hydrology and Sediment Control. University of Kentucky, 1975.

8. Metcalf and Eddy, Inc. Wastewater Engineering: Collection-Treatment-Disposal. McGraw-Hill Book Company, New York, 1972.

9. Clark, J. W., W. Viessman, Jr., and M. J. Hammer. Water Supply and Pollution Control. International Text Book Company, Scranton, Pennsylvania, 1971.

10. Liptak, B. G., Ed. Environmental Engineers' Handbook: Vol. I Water Pollution. Chilton Book Company, Radnor, Pennsylvania, 1974.

11. Ettinger, C. E., and J. E. Lichty. Evaluation of Performance Capability of Surface Mine Sediment Basins. EPA 440/1-79/200, U.S. Environmental Protection Agency, Cincinnati, Ohio 45268, 1979.

12. West Virginia Department of Natural Resources. Drainage Handbook for Surface Mining. Division of Planning and Development and Division of Reclamation, in Cooperation with U.S. Department of Agriculture, Soil Conservation District, Charleston, West Virginia, 1975.

13. ibid.

14. Kentucky Department for Natural Resources and Environmental Protection, Engineer's Handbook on Strip Mining in Eastern Kentucky. Frankfort, Kentucky, 1975.

15. West Virginia Department of Natural Resources. op. cit.

16. Environmental Protection Agency. op. cit.

17. ibid.

18. ibid.

19. Hill, R. D. Personal Communication. U.S. Environmental Protection Agency, Cincinnati, Ohio, 1978.

20. Ward, A., Haan, T., and Tapp, J. 1979. The Deposits Sedimentation Pond Design Manual. Institute for Mining and Minerals Research, Kentucky Center for Energy Research Laboratory, University of Kentucky, Lexington, Kentucky.

21. ibid.

22. Nawrocki and Pietrzak. op. cit.

23. Environmental Protection Agency. Erosion and Sediment Control, Vol. II Design. EPA 625/3-76-006, 1977.

24. ibid.

25. ibid.

26. ibid.

27. U.S. Department of Agriculture, Soil Conservation Service, Sediment Pond Design, SMA 2117 - Pond D. June 1977.

28. ibid.

29. Reed, Lloyd A. Effectiveness of Sediment Control Techniques Used During Highway Construction in Central Pennsylvania, U.S. Geological Survey Open File Report 77-498, October 1977.

## BIBLIOGRAPHY


1. American Water Works Association, Inc., 1971. Water Quality and Treatment. McGraw-Hill Book Company, New York. 654 pp.

2. Chen, Charng-Ning. 1975. Design of Sediment Retention Basins. National Symposium on Urban Hydrology and Sediment Control. University of Kentucky, Lexington, Kentucky. 14 pp.

3. Clark, J. W., W. Viessman, Jr., and M. J. Hammer. 1971. Water Supply and Pollution Control. International Textbook Company, Scranton. 661 pp.

4. Environmental Protection Agency. 1976. Erosion and Sediment Control, Vol. I Planning. EPA-625/3-76-006. 102 pp.

5. Environmental Protection Agency. 1977. Erosion and Sediment Control, Vol. II Design. EPA-625.3-76-006. 136 pp.

6. Ettinger, C. E., and J. E. Lichty. Evaluation of Performance Capability of Surface Mine Sediment Basins. EPA-440/1-79/200. U.S. Environmental Protection Agency, Cincinnati, Ohio, 1979.

7. Gutcho, Sidney. 1977. Waste Treatment With Polyelectrolytes and Other Flocculants. Noyes Data Corporation, Park Ridge, New Jersey. 274 pp.

8. Hazen and Sawyer, Engineers. 1975. Process Design Manual for Suspended Solids Removal. EPA-625/1-75-003a, U.S. Environmental Protection Agency, Washington, D.C. 263 pp.

9. Hill, R. D. 1976. Sedimentation Ponds - A Critical Review Sixth Symposium on Coal Mine Drainage Research National Coal Association, Louisville, Kentucky. 190-199 pp.

10. Hill, R. D. 1978. Personal Communication. U.S. Environmental Protection Agency, Office of Research and Development, Cincinnati, Ohio.

11. Janiak, H. 1975. Purification of Waters from Strip Lignite Mines. EPA-05-534-3, Wroclaw, Poland. 10 pp.

12. Kathuria, D. C., M. A. Nawrocki, and B. C. Becker. 1976. Effectiveness of Surface Mine Sedimentation Ponds. EPA-68-03-2139. U.S. Environmental Protection Agency, Cincinnati, Ohio. 101 pp.

13. Kent, K. M. 1969. Engineering Field Manual, Chapter 2, Estimating Runoff. U.S. Department of Agriculture Soil Conservatin Service, Washington, D.C. 2-76 pp.

14. Kentucky Department for Natural Resources and Environmental Protection. n.d. Engineer's Handbook on Strip Mining in Eastern Kentucky. Frankfort, Kentucky. 69 pp.

15. Liptak, B. G., Ed. 1974. Environmental Engineer's Handbook Vol. I Water Pollution. Chilton Book Company, Radnor, Pennsylvania. 2018 pp.

16. Mallory, C. W., M. A. Nawrocki. 1974. Containment Area Facility Concepts for Dredged Material Separation, Drying, and Rehandling. DACW 39-73-C-0136, Army Engineer Waterways Experiment Station. Columbia, Maryland. 259 pp.

17. McCarthy, R. E. 1973. Surface Mine Siltation Control. Mining Congress Journal. 6 pp.

18. Metcalf & Eddy, Inc. 1972. Wastewater Engineering: Collection-Treatment-Disposal. McGraw-Hill Book Company, New York. 782 pp.

19. Nawrocki, M. and J. Pietrzak. 1976. Methods to Control Fine-Grained Sediments Resulting from Construction Activity. EPA-440/9-76-026, Columbia, Maryland. 74 pp.

20. Reed, Lloyd A. Effectiveness of Sediment Control Techniques Used During Highway Construction in Central Pennsylvania, U.S. Geological Survey Open File Report 77-498, October 1977.

21. Tyron, C. P., B. L. Parsons, and M. R. Miller. 1976. Excavated Sediment Traps Prove Superior to Damned Ones. Third Federal Inter-Agency Sedimentation Conference, Water Resource Council, Denver, Colorado. 10 pp.

22. U.S. Department of Agriculture. 1972. Soil Conservation Service SCS National Engineering Handbook. Section 4 - Hydrology. 515 pp.

23. U.S. Weather Bureau. 1961. Rainfall-Frequency Atlas of the United States. Technical Paper 40, U.S. Government Printing Office, Washington, D.C.

24. Vostrcil, J., and F. Juracka. 1976. Commercial Organic Flocculants. Noyes Data Corporation, Park Ridge, New Jersey. 173 pp.

25. Ward, A. J., C. T. Haan, and B. J. Barfield. 1977. Simulation of the Sedimentology of Sediment Detention Basins. Research Report No. 103. University of Kentucky. U.S. Department of Interior, Lexington, Kentucky. 133 pp.

26. Ward, A., T. Haan, and J. Tapp. 1979. The Deposits Sedimentation Pond Design Manual. Institute for Mining and Minerals Research, Kentucky Center for Energy Research Laboratory, University of Kentucky, Lexington, Kentucky.

27. Water and Wastewater Chemistry, Part Two. Public Works. September, 1978. 103-110 pp.

28. West Virginia Department of Natural Resources. 1975. Drainage Handbook for Surface Mining. Division of Planning and Development and Division of Reclamation, in cooperation with U.S. Department of Agriculture, Soil Conservation District. Charleston, West Virginia. 75 pp.

29. Weber, W. J., Jr. 1972. Physiochemical Processes for Water Quality Control. Wiley-Interscience, New York. 640 pp.

30. Wilmoth, Roger C. Personal Communication. U.S. Environmental Protection Agency, Cincinnati, Ohio 1979.

31. Young, R. L. 1970. Above Lake Needwood. Trends in Parks and Recreation. January/February, 1970. 17-20 pp.

## TABLE A-1. COAGULANT MANUFACTURER SURVEY

| MANUFACTURER | TRADE NAME |
|---|---|
| ABCO Pool Industries<br>151 - 23 34th Avenue<br>Flushing, N. Y. 11352<br>(212) 463 - 2100 | |
| Alken - Murray Corp.<br>109 - 111 Fifth Avenue<br>N. Y., N. Y. 10029<br>(212) 777 - 6560 | |
| Allied Colloids, Inc.<br>One Robinson Lane<br>Ridgewood, N. J. 07450<br>(201) 447 - 4121 | Percol 877<br>Percol 352<br>Percol 455<br>Percol 511<br>Percol 1011<br>Percol 351<br>Percol E 24<br>Percol 155<br>Percol 156<br>Percol 720<br>Percol 725<br>Percol 726<br>Percol 727<br>Percol 730<br>Percol 722<br>Percol 728<br>Percol 763<br>Percol 757<br>Percol 776<br>Percol 744<br>Percol 751<br>Percol 788 N |
| Allstate Chemical Co.<br>Box 3040<br>Euclid, Ohio 44117<br>(216) 382 - 3900 | |

(continued)

## TABLE A-1. (continued)

| MANUFACTURER | TRADE NAME |
|---|---|
| American Colloid Co.<br>5100 Suffield Court<br>Skokie, Ill. 60076<br>(312) 966 - 5720 | Accofloc 361<br>Accofloc 352<br>Accofloc 350 |
| American Cyanamid<br>Water Treating Chemical Dept.<br>Berdan Avenue<br>Wayne, N. J. 07470<br>(201) 831 - 1234 | Magnifloc 573 C<br>Magnifloc 577 C<br>Magnifloc 581 C<br>Magnifloc 585 C<br>Magnifloc 589 C<br>Magnifloc 1986 N<br>Magnifloc 1849 A<br>Magnifloc 587 C |
| Armour Industrial Chemical Co.<br>P. O. Box 1805<br>Chicago, Ill. 60690<br>(312) 242 - 2750 | Arquad 2c/75<br>Arquad 2HT/75<br>Arquad T2C/50<br>Ethoquad /12 |
| Arnold & Clark Chemical<br>Houston, Texas 77001<br>(713) 869 - 0541 | |
| Baroid Division<br>Box 1175<br>Houston, Texas 77001<br>(713) 527 - 1500 | Barochem AF452<br>Barochem AF454<br>Surflo A100<br>Surflo A116<br>Surflo A117<br>Surflo A119<br>Barafloc 800<br>Barafloc 802<br>Barafloc 804<br>Barafloc 806<br>Barafloc 808<br>Barafloc 810 |
| Berdell Industries<br>28 - 01 Thomson Avenue<br>Long Island City, N. Y. 11101<br>(212) 361 - 7660 | |

(continued)

## TABLE A-1. (continued)

| MANUFACTURER | TRADE NAME |
|---|---|
| Betz Laboratories, Inc.<br>4636 Somerton Road<br>Trevose, Pa. 19047<br>(215) 355 - 3300 | |
| Bond Chemicals, Inc.<br>1500 Brookpark Road<br>Cleveland, Ohio 44109<br>(216) 741 - 6935 | |
| Borden Chemical<br>50 West Broad Street<br>Columbus, Ohio 43215<br>(614) 225 - 4000 | C77-120<br>C121-21 B<br>PR-450<br>PR-338<br>C163-86<br>C138-79<br>C163-86 +<br>C138-79 |
| Brenco Corp.<br>704 North First Street<br>St. Louis, Mo. 63102<br>(314) 621 - 8457 | |
| Buckman Laboratories, Inc.<br>1256 North McLean Blvd.<br>Memphis, Tenn. 38108<br>(901) 278 - 0330 | HCAT-1<br>HMWCP<br>WSCP-2<br>WSCP<br>NONI4<br>ANNI1 |
| C. E. Minerals<br>Division of Combustion<br>901 East 8 Avenue<br>King of Prussia, Pa. 19406<br>(215) 265 - 6880 | |
| Calgon Corp.<br>Water Chemical Dept.<br>P.O. Box 1346<br>Pittsburgh, Pa. 15222<br>(412) 923 - 2345 | CATFLOC<br>CATFLOC T<br>CATFLOC T1<br>CATFLOC 21<br>CATFLOC 121 |

(continued)

## TABLE A-1. (continued)

| MANUFACTURER | TRADE NAME |
|---|---|
| Calgon Corp.<br>(continued) | CATFLOC B<br>CATFLOC S<br>M-502<br>CA-233<br>CA-243<br>CA-253<br>WT-2640<br>M-540<br>L-650 E<br>L-670 E<br>L-690 E<br>L-670<br>L-690<br>M-570<br>M-580<br>M-590 |
| Carborundum Co.<br>Water Mgmt. Div.<br>Niagara Falls, N. Y. 14302<br>(716) 278 - 2572 | |
| Carus Chemical Co., Inc.<br>1500 Eighth Street<br>LaSalle, Ill. 61301<br>(815) 223 - 1500 | 91-AP<br>95-AP |
| Celanese Polymer Specialties Co.<br>Stein Hall & Co.<br>Technical Center<br>9800 East Bluegrass Pkwy.<br>P. O. Box 99038<br>Jeffersontown, Ky. 40299<br>(502) 585 - 8101 | Polyhall 295<br>Polyhall 295 C<br>Polyhall 1320<br>Polyhall 1650<br>Polyhall 1430<br>Polyhall 1082<br>Polyhall 522 D<br>Jaguor C-13 |

(continued)

## TABLE A-1. (continued)

| MANUFACTURER | TRADE NAME |
|---|---|
| Chromalloy American Corp.<br>641 Lexington Avenue<br>N. Y., N. Y. 10001<br>(212) 838 - 1177 | |
| Cities Service<br>P. O. Box 50360<br>Atlanta, Ga. 30302<br>(404) 261 - 9100 | Ferri-Floc |
| Commercial Chemical Products, Inc.<br>11 Patterson Avenue<br>Upper Saddle River, N. J. 07432<br>(201) 444 - 9100 | |
| Crown Zellerbach Corp.<br>Chemical Div.<br>Camas, Washington 98607<br>(206) 834 - 4444 | Orzan A<br>Orzan S |
| Crusader Chemical Co., Inc.<br>2330 Severn<br>Baltimore, Md. 21230<br>(301) 752 - 7602 | |
| Cutter Laboratories, Inc.<br>Fourth & Parker Street<br>Berkley, Cal. 94701<br>(415) 841 - 0123 | |
| Dade Div.<br>1851 Del. Pky.<br>P. O. Box 52067<br>Miami, Fla. 33101<br>(305) 633 - 6461 | |

(continued)

## TABLE A-1. (continued)

| MANUFACTURER | TRADE NAME |
|---|---|
| Dearborn Chemical Co.<br>Div. W. R. Grace & Co.<br>Merchandise Mart Plaza<br>Chicago, Ill. 60654<br>(312) 438 - 8241 | |
| Diamond Shamrock Corp.<br>1415 East Marlton Pike<br>Route 70<br>Cherryhill, N. J. 08034<br>(609) 428 - 7035 | Silica Sols |
| Dow Chemical Co.<br>P. O. Box 1847<br>2040 Dow Center<br>Midland, Michigan 48640<br>(517) 636 - 6053 | Separan MA-200<br>Separan MA-700<br>EPXD 30150<br>EPXD 30204 |
| Drew Chemical Corp.<br>One Drew Chemical Plaza<br>Boonton, N. J. 07005<br>(201) 263 - 7822 | Amerfloc 485<br>Amerfloc 2265<br>Drewfloc 495<br>Drewfloc 2306<br>Drewfloc 2270 |
| Dubois Chemicals<br>Div. of W. R. Grace & Co.<br>Dubois Tower<br>Cincinnati, Ohio 45202<br>(513) 769 - 4200 | |
| E. I. DuPont De Nemours & Co.<br>Wilmington, Del. 19898<br>(302) 774 - 1000 | Ferric Chloride |
| Electro - Chemical & Engineering<br>Emmaus, Pa. 18049<br>(215) 965 - 9061 | |

(continued)

## TABLE A-1. (continued)

| MANUFACTURER | TRADE NAME |
|---|---|
| Exxon Chemicals<br>Box 222, Building 12<br>Room 312 A<br>Linden, N. J. 07036<br>(201) 474 - 7499 | |
| Fabcon International<br>1275 Columbus Avenue<br>San Francisco, Cal. 94133<br>(415) 928 - 2400 | |
| Facet Enterprises<br>Newark, Del. 19711<br>(302) 731 - 4689 | |
| Henry W. Fink & Co.<br>6900 Silverton Avenue<br>Cincinnati, Ohio 45235<br>(513) 891 - 5583 | 100 Kleer-Floc<br>102 Kleer-Floc<br>107 Kleer-Floc<br>108 Kleer-Floc<br>110 Kleer-Floc<br>116 Kleer-Floc<br>453 Kleer-Floc |
| G. A. F. Corporation<br>140 West 51st Street<br>N. Y., N. Y. 10020<br>(212) 582 - 7600 | |
| Gamlen Chemical<br>Elwood, N. J. 08217<br>Bergen County<br>(609) 894 - 9264 | |
| General Mills Chemicals<br>4620 West 77th Street<br>Minneapolis, Mn. 55435<br>(612) 830 - 7968 | Galactasol 212<br>Galactasol SJM<br>Gendrix<br>Supercol<br>Galactasol-813 |

(continued)

## TABLE A-1. (continued)

| MANUFACTURER | TRADE NAME |
|---|---|
| A. F. Gooman and Sons<br>21 - 07 41st Street<br>Long Island City, N. Y. 11101<br>(212) 392 - 8400 | |
| B. F. Goodrich Chemical Co.<br>6100 Oak Tree Blvd.<br>Cleveland, Ohio 44131<br>(216) 524 - 0200 | |
| Haviland Product Co.<br>421 Ann Street, N. W.<br>Grand Rapids, Mi. 49504<br>(616) 361 - 6691 | Polyfloc A<br>Polyfloc C<br>Ployfloc MP |
| Heede International<br>Stamford, Conn. 06904<br>(203) 327 - 3320 | |
| Hercules Inc.<br>910 Market Street<br>Wilmington, Del. 19899<br>(302) 995 - 3860 | Herofloc 812<br>Herofloc 818<br>Herofloc 821<br>Herofloc 831<br>Herofloc 849<br>Herofloc 874 |
| Franz Herzel<br>150 East 58th Street<br>N. Y., N. Y. 10017<br>(212) 421 - 7060 | |
| Hodag Chemical Corp.<br>7247 North Central Avenue<br>Skokie, Ill. 60076<br>(312) 675 - 3950 | |

(continued)

## TABLE A-1. (continued)

| MANUFACTURER | TRADE NAME |
|---|---|
| Hyland Laboratories<br>3300 Hyland Avenue<br>Costa Mesa, Cal. 92626<br>(714) 540 - 5000 | |
| ICI Americans<br>Wilmington, Del. 19899<br>(302) 575 - 3518 | |
| Illinois Water Treatment Co.<br>4669 Shepherd Trail<br>Rockford, Ill. 61105<br>(815) 877 - 3041 | IFA-313 |
| KSH Chemicals Corp.<br>313 Cox Street<br>Roselle, N. J. 07068<br>(201) 245 - 8800 | |
| Kelco Co.<br>75 Terminal Avenue<br>Clark, N. J. 07066<br>(201) 381 - 6900 | |
| Key Chemicals, Inc.<br>4346 Tacony Street<br>Philadelphia, Pa. 19124<br>(215) 744 - 5858 | |
| Klenzoid Equipment Co.<br>912 - T Avenue<br>Conshohocken, Pa. 19428<br>(215) 825 - 9494 | |
| F. B. Leopold Co.<br>Zelienople, Pa. 16063<br>(412) 452 - 6300 | |

(continued)

## TABLE A-1. (continued)

| MANUFACTURER | TRADE NAME |
|---|---|
| Magna Corp.<br>Tech. Services Div.<br>Houston, Texas 77001<br>(713) 795 - 4270 | |
| Miles Laboratories, Inc.<br>1127 Myrtle Street<br>Elkhart, Ind. 46514<br>(800) 356 - 9393 | |
| Moqul Corp.<br>20600 Chagrin Blvd.<br>Cleveland, Ohio 44122<br>(216) 248 - 6914 | |
| Monsanto Company<br>800 N. Lindbergh Blvd.<br>St. Louis, Mo. 63141<br>(314) 694 - 1000 | |
| Nalco Chemical Co.<br>2901 Butterfield Rd.<br>Oak Brook, Ill. 60521<br>(312) 887-7500 | |
| National Starch & Chemical Corp.<br>1700 West Front St.<br>Plainfield, N.J. 07063<br>(201) 685 - 5000 | |
| Oakite Products, Inc.<br>50 Valley Road<br>Berkeley Hts., N.J. 07922<br>(201) 464 - 6900 | |
| O'Brien Industries, Inc.<br>513 W. Mt. Pleasant Ave.<br>Livingston, N.J. 07039<br>(201) 992 - 0660 | |

(continued)

## TABLE A-1. (continued)

| MANUFACTURER | TRADE NAME |
|---|---|
| Oxford Chemical Division<br>Consolidated Foods, Corp.<br>P.O. Box 80202<br>Atlanta, Ga. 30341<br>(404) 452 - 1100 | |
| Permutit Co.<br>49 East Midland Ave.<br>Paramus, N.J. 07652<br>(201) 262 - 8900 | |
| Peter Cooper Corp.<br>Palmer St.<br>Gowanda, N.Y. 14070<br>(716) 532 - 3344 | |
| Petrolite Corp.<br>369 Marshall St.<br>St. Louis, Mo. 63119<br>(314) 961 - 3500 | |
| Philadelphia Quartz Co.<br>P.O. Box<br>Valley Forge, Pa. 19481<br>(215) 293 - 7200 | |
| Reichhold Chemicals<br>523 North Broadway<br>White Plains, N.Y. 10602<br>(914) 682 - 5700 | |
| Rohm & Haas Co.<br>Independence Mall West<br>Philadelphia, Pa. 19105<br>(215) 592 - 3000 | Primafloc C-3<br>Primafloc C-7<br>Primafloc A-10 |
| A. E. Staley, MFG Co.<br>P.O. Box 151<br>Decatur, Ill. 62525<br>(217) 423 - 4411 | Hamaco 196 Gum<br>Potato Starch |

(continued)

## TABLE A-1. (continued)

| MANUFACTURER | TRADE NAME |
|---|---|
| Standard Brands Chemicals<br>625 Madison Avenue<br>N.Y., N.Y. 10022<br>(212) 759 - 4400 | |
| Techni-Chem.<br>East State Street<br>Box 428 T<br>Cherry Valley, Ill. 61016<br>(815) 332 - 4987 | |
| Union Carbide Corp.<br>270 Park Avenue<br>N.Y., N.Y. 10017<br>(212) 551 - 2345 | Polyox WSR-301<br>Polyox WSR<br>Coag |
| Unitech Chemical, Inc.<br>Swift Products<br>115 West Jackson Blvd.<br>Chicago, Ill. 60604<br>(312) 431 - 3560 | X-100<br>X-400<br>X-420<br>X-110<br>X-700 |
| Val - Chem. Corp.<br>P.O. Box 172<br>Edison, N. J. 08817<br>(201) 985 - 3773 | |
| James Varley & Sons<br>1200 Switzer Avenue<br>St. Louis, Mo. 63147<br>(314) 383 - 4372 | |
| Witco Chem. Corp.<br>227 A. Park Avenue<br>N.Y., N.Y. 10001<br>(212) 644 - 6300 | |
| Zimmite Corp.<br>810 Sharon Drive<br>Westlake, Ohio 44145<br>(216) 871 - 9660 | |

# TABLE A-2. COAGULANT/FLOCCULANT DATA FORM

| COAGULANT CHARACTERISTICS | | REAGENT TRADE NAME | | |
|---|---|---|---|---|
| | | Percol 727 | Magnifloc 573C | Magnifloc 577C |
| | CODE | 3-M | 6-A | 6-B |
| CHEMICAL | Composition | Polyelectrolyte | Polyelectrolyte | Polyelectrolyte |
| CHEMICAL | Ionic Charge | Anionic (Medium to High) | Cationic | (High) Cationic |
| PHYSICAL | Reagent Form | (Granular) Powder | Liquid | Liquid |
| PHYSICAL | Molecular Weight | Ultra-High | | High |
| PHYSICAL | Freezing Point | | 0° F (Can be used after it freezes) | 0° F (Can be used after it freezes) |
| SOLUTION PREPARATION | Dilution | Stock: 0.10% - 0.25% | 100:1 | 100:1 |
| SOLUTION PREPARATION | Mixing Time | Handshake 10-15 Sec., Occasional Shaking 30-60 Min. | 20 - 30 Minutes | 20 - 30 Minutes |
| SOLUTION PREPARATION | Shelf Life | Solid: Up to 2 Years Stock Solution: Up to 5 Days | 12 - 14 Months | 50° - 100° F: 12 Months |
| STORAGE | Reagent | Cool, Dry Place | Store in Glass, Stainless Steel, Plastic or epoxy-lined vessels | Store in Glass, Stainless Steel, Plastic or epoxy-lined vessels |
| STORAGE | Stock Solution | Dark Place | | |
| | TYPICAL APPLICATIONS | Waste Treatment, primarily for settling application either by itself or with inorganic primary coagulants | Gravity settling; clarification; settling basins | De-watering sludge; settling and clarifying |

(continued)

## TABLE A-2. (continued)

| COAGULANT CHARACTERISTICS | | REAGENT TRADE NAME | | |
|---|---|---|---|---|
| | CODE | Magnifloc 581C<br>6-C | Magnifloc 585C<br>6-D | Magnifloc 587C<br>6-E |
| CHEMICAL | Composition | Polyelectrolyte | Polyelectrolyte | Polyelectrolyte |
| CHEMICAL | Ionic Charge | (High) Cationic | Cationic | (High) Cationic |
| PHYSICAL | Reagent Form | Liquid | Liquid | Liquid |
| PHYSICAL | Molecular Weight | High | Low | Low |
| PHYSICAL | Freezing Point | 0° F (Can be used after it freezes) | -5° C (Can be used after freezing) | -5° C (Can be used after freezing) |
| SOLUTION PREPARATION | Dilution | 100:1 | 100:1 | 100:1 |
| SOLUTION PREPARATION | Mixing Time | 20 - 30 Minutes | 20 - 30 Minutes | 20 - 30 Minutes |
| SOLUTION PREPARATION | Shelf Life | 12 - 14 Months | 12 - 14 Months | 12 - 24 Months |
| STORAGE | Reagent | Store in Glass, Stainless Steel, Plastic or Epoxy-lined vessels | Store in Glass, Stainless Steel, Plastic or Epoxy-lined vessels | Store in Glass, Stainless Steel Plastic or Epoxy-lined vessels |
| STORAGE | Stock Solution | | | |
| | TYPICAL APPLICATIONS | Gravity Settling; Clarification; Settling basins | Gravity Settling and other clarifiers | Particularly effective on low turbidity water |

(continued)

## TABLE A-2. (continued)

| COAGULANT CHARACTERISTICS | | REAGENT TRADE NAME | | |
|---|---|---|---|---|
| | | Magnifloc 589C | Hicat 1 | Cat-Floc |
| | CODE | 6-F | 15-A | 17-A |
| CHEMICAL | Composition | Polyelectrolyte | Polyelectrolyte (25% polymer solids) | Polyelectrolyte Polydimethyldiallyl $NH_4$ Cl |
| CHEMICAL | Ionic Charge | Cationic | Cationic | Cationic |
| PHYSICAL | Reagent Form | Liquid | Liquid | Liquid |
| PHYSICAL | Molecular Weight | High | | |
| PHYSICAL | Freezing Point | -5° C (Can be used after freezing) | | 27° F; Low temp. may cause feeding problems (viscosity) |
| SOLUTION PREPARATION | Dilution | 100:1 | Predilution 250:1 to make sol'n no > 0.1% polymer solids | ≥ 100:1 |
| SOLUTION PREPARATION | Mixing Time | 20 - 30 Minutes | | Specially selected clay may be needed if time is short |
| SOLUTION PREPARATION | Shelf Life | 12 - 24 Months | | |
| STORAGE | Reagent | Store in Glass, Stainless Steel, Plastic or Epoxy-lined vessels | | Heated Building |
| STORAGE | Stock Solution | | | |
| | TYPICAL APPLICATIONS | Gravity Settling Operations; Mechanical dewatering | Clarify wastewater, sludge dewatering; mineral and chemical processing | Clarification |

(continued)

## TABLE A-2. (continued)

| COAGULANT CHARACTERISTICS | | REAGENT TRADE NAME | | |
|---|---|---|---|---|
| | | Cat-Floc T | Cat-Floc T-1 | M-502 |
| | CODE | 17-B | 17-C | 17-H |
| CHEMICAL | Composition | Polyelectrolyte Polydimethyldially $NH_4$ Cl | Polyelectrolyte Polydimethyldially $NH_4$ Cl | Polyelectrolyte Polydimethyldially $NH_4$ Cl |
| CHEMICAL | Ionic Charge | Cationic | Cationic | Cationic |
| PHYSICAL | Reagent Form | Liquid | Liquid | (High viscosity) Liquid |
| PHYSICAL | Molecular Weight | | | |
| PHYSICAL | Freezing Point | 27° F; Low temp. may cause feeding problems (viscosity), freezing may cause stratification | 26° F; Low temp may cause feeding problems (viscosity) | 27° F; Low temps may create feeding problems (viscosity) |
| SOLUTION PREPARATION | Dilution | ≥100:1 | ≥100:1 | ≥100:1 |
| SOLUTION PREPARATION | Mixing Time | | | |
| SOLUTION PREPARATION | Shelf Life | | | |
| STORAGE | Reagent | Heated Building | Heated Building | Heated Building |
| STORAGE | Stock Solution | | | |
| | TYPICAL APPLICATIONS | Clarification | Clarification | Mining industry clarification |

(continued)

## TABLE A-2. (continued)

| COAGULANT CHARACTERISTICS | | REAGENT TRADE NAME | | |
|---|---|---|---|---|
| | | Ferri-Floc | Separan MG-200 | Separan MG-700 |
| | CODE | 22-A | 30-A | 30-B |
| CHEMICAL | Composition | Ferric sulfate (Ferric hydroxide) | (Slightly hydrolyzed) Polyacrylamide | Polyacrylamide |
| CHEMICAL | Ionic Charge | Cationic | (Slightly) Anionic | Anionic |
| PHYSICAL | Reagent Form | Dry powder | (Granular) Solid | (Granular) Solid |
| PHYSICAL | Molecular Weight | | Very high | Very high |
| PHYSICAL | Freezing Point | | | |
| SOLUTION PREPARATION | Dilution | | Maximum strength = 1% Usually $\leq 0.5\%$ | Maximum strength = 0.5% Usually $\leq 0.5\%$ |
| SOLUTION PREPARATION | Mixing Time | 30 Minutes | | |
| SOLUTION PREPARATION | Shelf Life | Reagent: 6-12 months Conc. Sol'n: recommend 60 days (but can store indefinitely) | Reagent: up to 2 years Stock sol'n: 1 month | Reagent: up to 2 years Stock sol'n: 1 month |
| STORAGE | Reagent | Slightly hygroscopic (avoid high humidity and no contact with water) | $< 100^{\circ}$ F and avoid high humidity | $100^{\circ}$ F and avoid high humidity |
| STORAGE | Stock Solution | | $< 120^{\circ}$ F | $120^{\circ}$ F |
| | TYPICAL APPLICATIONS | Turbidity removal; organic color removal; with lime softening; manganese removal; waste treatment; toxic metal removal. | Specific mining separation problems - for clarification sometimes used after alum or lime. | Mine water clarification; water treatment; coal prep. plants; tailings pond stabilization - for clarification often used after alum or lime. |

(continued)

## TABLE A-2. (continued)

| COAGULANT CHARACTERISTICS | | REAGENT TRADE NAME Experimental Polymer XD-30150.00 | Experimental Polymer XD-30204 | Amerfloc 485 |
|---|---|---|---|---|
| | CODE | 30-C | 30-D | 31-A |
| CHEMICAL | Composition | Polyacrylamide | Polyacrylamide | Organic Polyelectrolyte |
| CHEMICAL | Ionic Charge | (Slightly) Anionic | (Moderately) Anionic | Cationic |
| PHYSICAL | Reagent Form | Powder | Powder | Liquid |
| PHYSICAL | Molecular Weight | High | Very high | Moderate |
| PHYSICAL | Freezing Point | | | 32° F |
| SOLUTION PREPARATION | Dilution | Normally 0.5-1.0% | Normally 0.25-0.5% | 5:1 |
| SOLUTION PREPARATION | Mixing Time | | | |
| SOLUTION PREPARATION | Shelf Life | Stock sol'n: ≥0.25% = 1 month ≤0.05% = 1 day | Stock sol'n: ≥0.25% = 1 month ≤0.05% = 1 day | Reagent: 12 - 14 Months |
| STORAGE | Reagent | 100° F and avoid high humidity | 100° F and avoid high humidity | Store at 40° - 100° F |
| STORAGE | Stock Solution | 120° F | 120° F | |
| | TYPICAL APPLICATIONS | Tailings water recovery; acid leaching; potash brine clarifying; preleach thickening. | | Water and waste treatment; suspended solids; turbidity in wastewaters; heavy metals |

(continued)

## TABLE A-2. (continued)

| COAGULANT CHARACTERISTICS | | REAGENT TRADE NAME | | |
|---|---|---|---|---|
| | | Polyfloc C | Hercofloc 812 | Hercofloc 818 |
| | CODE | 44-B | 46-A | 46-B |
| CHEMICAL | Composition | Synthetic Polyelectrolyte | Synthetic organic Polyelectrolyte | Synthetic organic Polyelectrolyte |
| CHEMICAL | Ionic Charge | Cationic | (Low) Cationic | (Low) Anionic |
| PHYSICAL | Reagent Form | Liquid | Powder | Powder |
| PHYSICAL | Molecular Weight | High | High | High |
| PHYSICAL | Freezing Point | Should not permit freezing | | |
| SOLUTION PREPARATION | Dilution | 10-20:1 | ≤0.5% | ≤0.5% |
| SOLUTION PREPARATION | Mixing Time | | ≥1 hour | ≥1 hour |
| SOLUTION PREPARATION | Shelf Life | | Reagent: 1 yr. (less if pH 6 of solution water)<br>Sol'n: 1 week | Reagent: 1 year<br>Sol'n: 1 week |
| STORAGE | Reagent | | Dry, cool area | Dry, cool area |
| STORAGE | Stock Solution | | | |
| | TYPICAL APPLICATIONS | Clarifying wastewater; settling suspended clays | Water and waste treatment | Water and waste treatment |

(continued)

## TABLE A-2. (continued)

| | COAGULANT CHARACTERISTICS | REAGENT TRADE NAME Hercofloc 821 | Hercofloc 831 | Hercofloc 849 |
|---|---|---|---|---|
| | CODE | 46-C | 46-D | 46-E |
| CHEMICAL | Composition | Synthetic organic Polyelectrolyte | Synthetic organic Polyelectrolyte | Synthetic organic Polyelectrolyte |
| CHEMICAL | Ionic Charge | (High) Anionic | (Medium) Anionic | (Medium-High) Cationic |
| PHYSICAL | Reagent Form | Powder | Powder | Powder |
| PHYSICAL | Molecular Weight | High | High | High |
| PHYSICAL | Freezing Point | | | |
| SOLUTION PREPARATION | Dilution | ≤0.5% | ≤0.5% | ≤0.5% |
| SOLUTION PREPARATION | Mixing Time | ≥1 hour | ≥1 hour | ≥1 hour |
| SOLUTION PREPARATION | Shelf Life | Reagent: 1 year Sol'n: 1 week | Reagent: 1 year Sol'n: 1 week | Reagent: 1 yr. (less if pH 6 of sol'n water) Sol'n: 1 week |
| STORAGE | Reagent | Dry, cool area | Dry, cool area | Dry, cool area |
| STORAGE | Stock Solution | | | |
| | TYPICAL APPLICATIONS | Water and waste treatment | Water and waste treatment | Water and waste treatment |

(continued)

## TABLE A-2. (continued)

| COAGULANT CHARACTERISTICS | | REAGENT TRADE NAME | | |
|---|---|---|---|---|
| | CODE | Hercofloc 874<br>46-F | Nalco 7107<br>61-F | Nalco 7134<br>61-H |
| CHEMICAL | Composition | Synthetic organic Polyelectrolyte | | |
| CHEMICAL | Ionic Charge | (Medium) Cationic | Cationic | Cationic |
| PHYSICAL | Reagent Form | Powder | Liquid | Liquid |
| PHYSICAL | Molecular Weight | High | Low | High |
| PHYSICAL | Freezing Point | | After freeze, thaw and use; Freeze (conc.): 0° F | Avoid freezing due to viscosity; freeze (conc.): -15° F |
| SOLUTION PREPARATION | Dilution | ≤0.5% | | |
| SOLUTION PREPARATION | Mixing Time | ≥1 hour | | |
| SOLUTION PREPARATION | Shelf Life | Reagent: 1 yr. (less if pH 6 of sol'n water) Sol'n: 1 week | Reagent: 1 year 10% sol'n: 1 week | Reagent: 1 year Sol'n ( ≥ 10%): 1 week |
| STORAGE | Reagent | Dry, cool area | | |
| STORAGE | Stock Solution | | | |
| | TYPICAL APPLICATIONS | Water and waste treatment | Nonpotable water clarification and treatment systems. | Waste treatment clarification |

(continued)

## TABLE A-2. (continued)

| | COAGULANT CHARACTERISTICS | REAGENT TRADE NAME Nalco 8851 | Nalco 8852 | Primafloc C-7 |
|---|---|---|---|---|
| | CODE | 61-K | 61-L | 71-C |
| CHEMICAL | Composition | | | Polyelectrolyte |
| CHEMICAL | Ionic Charge | Cationic | Cationic | Cationic |
| PHYSICAL | Reagent Form | Liquid | Liquid | Powder |
| PHYSICAL | Molecular Weight | Low | Moderate | Very high |
| PHYSICAL | Freezing Point | 14° F | 14° F | |
| SOLUTION PREPARATION | Dilution | | 2-6% | |
| SOLUTION PREPARATION | Mixing Time | Cold: 5-10 minutes<br>Warm: 4-5 minutes | Warm: 5 minutes<br>Cold: 5+ minutes | 30 minutes - 4 hours depending upon size of tank and mixer |
| SOLUTION PREPARATION | Shelf Life | Reagent: 1 year<br>>10% Sol'n: several weeks<br>≤10% Sol'n: 1 day | Reagent: 1 year<br>>10% Sol'n: several weeks<br>≤10% Sol'n: 1 day | Stable in both reagent and sol'n as long as pH is not increased |
| STORAGE | Reagent | | | Cool, dry area |
| STORAGE | Stock Solution | | | |
| | TYPICAL APPLICATIONS | Clarifications filtering and dewatering | Settling, clarifying, thickening and dewatering mineral processing slurries. | Flocculation of solids from water and wastewater; conditioning of sludge; when S.S. 50 ppm, add clay prior to C-7; also can use with inorganics. |

(continued)

## TABLE A-2. (continued)

| | COAGULANT CHARACTERISTICS | Superfloc 315 | REAGENT TRADE NAME Alum | Lime (Hydrated) |
|---|---|---|---|---|
| | CODE | 315 | | |
| CHEMICAL | Composition | Polyamine | $Al_2(SO_4)_3 \cdot 18\ H_2O$ | $Ca(OH)_2$ 82-98% $Ca(OH)_2$ |
| CHEMICAL | Ionic Charge | Highly Cationic | | |
| PHYSICAL | Reagent Form | Liquid | Dry granular powder (grayish white crystallized solid) or alum syrup | Granular powder (white) |
| PHYSICAL | Molecular Weight | | 600 | 74.08 |
| PHYSICAL | Freezing Point | 0°F (-18°C) Can be used after freezing | | |
| SOLUTION PREPARATION | Dilution | 0.1 - 5.0 ppm | 5 - 50 ppm - application rate | |
| SOLUTION PREPARATION | Mixing Time | | 15 - 30 min. | 40 min. retention period |
| SOLUTION PREPARATION | Shelf Life | 12-24 months | 12 months | 12 months |
| STORAGE | Reagent | In glass, stainless steel, plastic or epoxy lined vessels | | |
| STORAGE | Stock Solution | | | package in multiwall paper bags (must be covered) |
| | TYPICAL APPLICATIONS | Thickening and dewatering mineral concentrates and tailings. | Effective for pH 5.5 to 8.0 removal of suspended and colloridal solids. | |

# TABLE A-3. PRELIMINARY LABORATORY TEST RESULTS

## Abbreviations for Settling Characteristics

| ABBREVIATIONS | DESCRIPTION |
|---|---|
| V.S.S. | Very Slow Settling |
| S.S. | Slow Settling |
| F.S. | Fair Settling |
| G.S. | Good Settling |
| R.S. | Rapid Settling |
| C.S. | Clear Supernatant |
| S.T.S. | Slightly Turbid Supernatant |
| T.S. | Turbid Supernatant |
| V.T.S. | Very Turbid Supernatant |
| S.F.P. | Small Flocced Particles |
| L.F.P. | Large Flocced Particles |
| C | Control |

## Turbidity and Suspended Solids of Control Sample

| MODEL SEDIMENT POND | TURBIDITY (JTU) | TSS (mg/l) |
|---|---|---|
| PA1 | 20 | 32 |
| WV1 | 44 | 29 |
| WV2A | 7 | 28 |
| WV3 | 92 | 74 |
| WV4 | 880 | 1,176 |
| KY1 | 210 | 186 |

(continued)

## TABLE A-3. (continued)

**Sediment Pond PA-1**

| COAGULANT | DOSAGE (ppm) | pH | TURBIDITY (JTU) | PERCENT REMOVAL | SUSPENDED SOLIDS (mg/l) | PERCENT REMOVAL | SETTLING CHARAC-TERISTICS |
|---|---|---|---|---|---|---|---|
| 3M | 1.5 | 5.2 | 3.8 | 81 | 9 | 72 | R.S. |
| 6A | 1.0 | 5.2 | 6.0 | 70 | 10 | 69 | F.S. |
| 6A | 1.5 | 5.2 | 5.3 | 73 | 12 | 63 | F.S. |
| 6B | 0.5 | 5.2 | 5.6 | 72 | 8 | 21 | F.S. |
| 6B | 1.5 | 5.2 | 7.4 | 63 | 8 | 75 | F.S. |
| 6C | 1.5 | 6.0 | 4.4 | 78 | 9 | 72 | R.S. |
| 6D | 1.5 | 6.0 | 3.0 | 85 | 2 | 94 | F.S. |
| 6E | 0.5 | 5.9 | 3.6 | 82 | 1 | 97 | S.S. |
| 6F | 0.5 | 6.0 | 4.5 | 78 | 10 | 69 | F.S. |
| 15A | 1.0 | 5.7 | 4.3 | 79 | 8 | 75 | F.S. |
| 15A | 1.5 | 5.7 | 4.3 | 79 | 8 | 75 | R.S. |

**(continued)**

## TABLE A-3. (continued)
### Sediment Pond PA-1

| COAGULANT | DOSAGE (ppm) | pH | TURBIDITY (JTU) | PERCENT REMOVAL | SUSPENDED SOLIDS (mg/l) | PERCENT REMOVAL | SETTLING CHARACTERISTICS |
|---|---|---|---|---|---|---|---|
| 17A | 0.5 | 5.9 | 4.7 | 77 | 15 | 53 | F.S. |
| 17A | 1.5 | 5.7 | 6.4 | 68 | 5 | 84 | R.S. |
| 17B | 1.0 | 5.6 | 6.1 | 70 | 12 | 63 | S.S. |
| 17B | 1.5 | 5.6 | 4.0 | 80 | 19 | 41 | F.S. |
| 17C | 0.5 | 5.5 | 5.7 | 72 | 1 | 96 | S.S. |
| 17C | 1.5 | 5.4 | 3.8 | 71 | 7 | 78 | F.S. |
| 17H | 1.0 | 5.4 | 3.3 | 84 | 1 | 97 | R.S. |
| 22A | 1.0 | 5.0 | 19 | 5.0 | 36 | 0 | V.S.S. |
| 22A | 1.5 | 4.9 | 20 | 0 | 30 | 6 | V.S.S. |
| 30A | 1.0 | 5.1 | 10 | 50 | 2 | 94 | R.S., T.S. |
| 30B | 0.5 | 5.4 | 2.5 | 88 | 5 | 84 | R.S., C.S., L.F.P. |

(continued)

## TABLE A-3. (continued)
### Sediment Pond PA-1

| COAGULANT | DOSAGE (ppm) | pH | TURBIDITY (JTU) | PERCENT REMOVAL | SUSPENDED SOLIDS (mg/l) | PERCENT REMOVAL | SETTLING CHARAC-TERISTICS |
|---|---|---|---|---|---|---|---|
| 30C | 1.5 | 5.2 | 2.8 | 86 | 1 | 97 | F.S. |
| 30D | 1.0 | 5.1 | 12 | 40 | 11 | 50 | R.S., T.S., L.F.P. |
| 30D | 1.5 | 5.0 | 9.0 | 55 | 19 | 41 | R.S., T.S., L.F.P. |
| 34A | 0.5 | 6.0 | 4.3 | 80 | 6 | 81 | R.S. |
| 44B | 1.0 | 5.1 | 2.8 | 86 | 19 | 41 | R.S. |
| 44B | 1.5 | 5.1 | 3.6 | 20 | 6 | 81 | R.S., L.F.P. |
| 46A | 0.5 | 5.3 | 6.9 | 66 | 5 | 84 | S.S. |
| 46B | 0.5 | 5.1 | 10 | 50 | 15 | 53 | S.S., T.S. |
| 46B | 1.0 | 5.1 | 12 | 40 | 1 | 97 | F.S., T.S. |
| 46C | 0.5 | 5.4 | 2.0 | 90 | 1 | 97 | S.S. |
| 46C | 1.0 | 5.4 | 3.9 | 81 | <1 | 100 | F.S. |

(continued)

## TABLE A-3. (continued)

**Sediment Pond PA-1**

| COAGULANT | DOSAGE (ppm) | pH | TURBIDITY (JTU) | PERCENT REMOVAL | SUSPENDED SOLIDS (mg/l) | PERCENT REMOVAL | SETTLING CHARAC-TERISTICS |
|---|---|---|---|---|---|---|---|
| 46D | 1.5 | 5.6 | 6.8 | 66 | 1 | 97 | R.S., L.F.P. |
| 46E | 0.5 | 5.4 | 9.0 | 55 | 7 | 78 | F.S. |
| 46F | 0.5 | 5.3 | 8.0 | 60 | 13 | 59 | R.S., T.S. |
| 46F | 1.0 | 5.2 | 10 | 50 | 8 | 75 | R.S., T.S. |
| 61F | 0.5 | 5.7 | 11 | 45 | 13 | 59 | V.S.S. |
| 61F | 1.5 | 5.4 | 7.3 | 63 | 16 | 50 | S.S. |
| 61H | 0.5 | 5.4 | 7.7 | 62 | 9 | 72 | F.S. |
| 61K | 1.0 | 5.2 | 11 | 45 | 23 | 28 | F.S. |
| 61L | 0.5 | 5.2 | 7.7 | 61 | 31 | 3 | F.S. |
| 71C | 0.5 | 5.2 | 16 | 20 | 5 | 84 | S.S., T.S. |
| Lime | 2.2 | 11 | 39 | >C | 74 | >C | L.F.P. |

(continued)

## TABLE A-3. (continued)

**Sediment Pond PA-1**

| COAGULANT | DOSAGE (ppm) | pH | TURBIDITY (JTU) | PERCENT REMOVAL | SUSPENDED SOLIDS (mg/l) | PERCENT REMOVAL | SETTLING CHARAC-TERISTICS |
|---|---|---|---|---|---|---|---|
| Alum | 106 | 3.2 | 72 | >C | 86 | >C | V.S.S., V.T.S. |

(continued)

## TABLE A-3. (continued)

**Sediment Pond WV-1**

| COAGULANT | DOSAGE (ppm) | pH | TURBIDITY (JTU) | PERCENT REMOVAL | SUSPENDED SOLIDS (mg/l) | PERCENT REMOVAL | SETTLING CHARAC-TERISTICS |
|---|---|---|---|---|---|---|---|
| 3M | 1.0 | 7.6 | 23 | 48 | 17 | 41 | R.S., S.T.S. |
| 6A | 0.5 | 6.8 | 20 | 55 | 25 | 14 | S.S., T.S. |
| 6A | 1.0 | 7.1 | 16 | 64 | 32 | 0 | S.S., T.S. |
| 6B | 1.5 | 7.5 | 3.9 | 91 | 10 | 66 | R.S., C.S. |
| 6C | 1.0 | 7.2 | 16 | 64 | 17 | 41 | F.S. |
| 6C | 1.5 | 7.3 | 13 | 70 | 28 | 3.4 | R.S. |
| 6D | 1.5 | 7.6 | 6.7 | 85 | 20 | 31 | F.S. |
| 6E | 1.5 | 7.4 | 5.2 | 88 | 12 | 59 | F.S. |
| 6F | 0.5 | 7.5 | 12 | 73 | 19 | 34 | F.S. |
| 6F | 1.5 | 7.6 | 7.0 | 84 | 21 | 28 | R.S. |
| 15A | 1.5 | 7.4 | 14 | 68 | 22 | 24 | S.S. |

**(continued)**

## TABLE A-3. (continued)
### Sediment Pond WV-1

| COAGULANT | DOSAGE (ppm) | pH | TURBIDITY (JTU) | PERCENT REMOVAL | SUSPENDED SOLIDS (mg/l) | PERCENT REMOVAL | SETTLING CHARAC-TERISTICS |
|---|---|---|---|---|---|---|---|
| 17A | 1.5 | 7.6 | 3.4 | 92 | 17 | 41 | F.S., C.S. |
| 17B | 1.5 | 7.3 | 5.3 | 88 | 15 | 48 | F.S. |
| 17C | 1.5 | 7.4 | 12 | 73 | 6 | 79 | R.S., C.S. |
| 17H | 1.5 | 7.6 | 4.9 | 89 | 13 | 55 | S.S. |
| 22A | 1.0 | 7.7 | 37 | 16 | 30 | 0 | V.S.S. |
| 30A | 0.5 | 7.6 | 21 | 52 | 21 | 28 | R.S. |
| 30A | 1.5 | 7.7 | 24 | 45 | 19 | 34 | R.S. |
| 30B | 1.0 | 7.5 | 29 | 34 | 25 | 14 | R.S., T.S. |
| 30C | 1.0 | 7.6 | 24 | 45 | 23 | 21 | R.S., T.S. |
| 30D | 1.0 | 7.5 | 22 | 50 | 19 | 34 | R.S., T.S. |
| 30D | 1.5 | 7.7 | 26 | 41 | 8 | 72 | R.S., T.S. |

(continued)

## TABLE A-3. (continued)
### Sediment Pond WV-1

| COAGULANT | DOSAGE (ppm) | pH | TURBIDITY (JTU) | PERCENT REMOVAL | SUSPENDED SOLIDS (mg/l) | PERCENT REMOVAL | SETTLING CHARACTERISTICS |
|---|---|---|---|---|---|---|---|
| 31A | 1.5 | 7.6 | 8.0 | 82 | 8 | 72 | R.S. |
| 44B | 1.0 | 7.7 | 17 | 61 | 12 | 59 | R.S. |
| 46A | 0.5 | 6.9 | 5.1 | 88 | 8 | 72 | R.S., C.S. |
| 46A | 1.0 | 7.1 | 5.2 | 88 | 1 | 97 | R.S., C.S. |
| 46B | 0.5 | 7.3 | 8.0 | 82 | 13 | 55 | R.S., S.T. |
| 46C | 0.5 | 7.4 | 11 | 75 | 23 | 21 | S.S. |
| 46D | 1.0 | 7.5 | 15 | 66 | 26 | 10 | R.S. |
| 46E | 0.5 | 7.0 | 6.2 | 86 | 16 | 45 | S.S. |
| 46E | 1.0 | 7.1 | 9.0 | 80 | 12 | 59 | R.S. |
| 46F | 1.0 | 7.4 | 8.2 | 81 | 9 | 69 | R.S., T.S. |
| 61F | 2.5 | 7.4 | 16 | 64 | 22 | 24 | R.S. |

(continued)

## TABLE A-3. (continued)
### Sediment Pond WV-1

| COAGULANT | DOSAGE (ppm) | pH | TURBIDITY (JTU) | PERCENT REMOVAL | SUSPENDED SOLIDS (mg/l) | PERCENT REMOVAL | SETTLING CHARAC-TERISTICS |
|---|---|---|---|---|---|---|---|
| 61H | 2.5 | 7.4 | 7.1 | 84 | 19 | 34 | R.S. |
| 61K | 2.5 | 7.5 | 3.5 | 92 | 10 | 66 | R.S. |
| 61L | 2.5 | 7.6 | 3.5 | 92 | 14 | 52 | R.S. |
| 71C | 0.5 | 7.4 | 30 | 32 | 30 | 0 | S.S., T.S. |
| 71C | 1.5 | 7.5 | 38 | 14 | 27 | 7 | S.S., T.S. |
| Lime | 2.4 | 10.8 | 37 | 16 | 61 | >C | L.F.P. |
| Alum | 105 | 3.3 | 100 | >C | 130 | >C | V.S.S., V.T.S. |

(continued)

## TABLE A-3. (continued)
### Sediment Pond WV-2

| COAGULANT | DOSAGE (ppm) | pH | TURBIDITY (JTU) | PERCENT REMOVAL | SUSPENDED SOLIDS (mg/l) | PERCENT REMOVAL | SETTLING CHARAC-TERISTICS |
|---|---|---|---|---|---|---|---|
| 6A | 1.0 | 6.0 | 5.4 | 23 | 10 | 64 | S.S. |
| 6B | 1.0 | 6.1 | 6.5 | 7 | 8 | 71 | S.S. |
| 6C | 0.5 | 6.2 | 5.1 | 27 | 4 | 86 | S.S. |
| 6D | 0.5 | 5.9 | 4.7 | 19 | 6 | 79 | S.S. |
| 6E | 1.0 | 5.8 | 5.2 | 27 | 7 | 75 | F.S. |
| 6F | 1.0 | 5.9 | 5.2 | 27 | 13 | 54 | R.S. |
| 15A | 0.5 | 5.9 | 4.3 | 39 | 13 | 54 | S.S. |
| 17A | 0.5 | 5.8 | 3.7 | 47 | 9 | 68 | S.S. |
| 17B | 0.5 | 5.8 | 4.9 | 30 | 17 | 40 | F.S. |
| 17B | 1.5 | 5.8 | 6.1 | 13 | 14 | 50 | R.S., L.F.P. |
| 17C | 0.5 | 6.0 | 4.6 | 34 | 12 | 57 | S.S. |

(continued)

## TABLE A-3. (continued)
### Sediment Pond WV-2

| COAGULANT | DOSAGE (ppm) | pH | TURBIDITY (JTU) | PERCENT REMOVAL | SUSPENDED SOLIDS (mg/l) | PERCENT REMOVAL | SETTLING CHARAC-TERISTICS |
|---|---|---|---|---|---|---|---|
| 17H | 0.5 | 5.8 | 5.5 | 21 | 5 | 82 | S.S. |
| 30A | 0.5 | 5.8 | 5.9 | 16 | 26 | 7 | F.S., T.S. |
| 30A | 1.0 | 5.9 | 4.6 | 34 | 30 | 70 | R.S.,L.F.P. |
| 30C | 1.0 | 5.9 | 2.5 | 64 | 24 | 14 | R.S.,L.F.P. |
| 30C | 1.5 | 5.9 | 2.8 | 60 | 20 | 29 | R.S.,L.F.P. |
| 30D | 0.5 | 5.9 | 3.4 | 51 | 12 | 57 | F.S.,L.F.P. |
| 31A | 0.5 | 5.9 | 5.3 | 24 | 12 | 57 | R.S. |
| 44B | 1.5 | 6.0 | 2.7 | 64 | 4 | 86 | R.S., L.F.P. |
| 46A | 1.0 | 6.1 | 1.9 | 73 | 7 | 75 | R.S., L.F.P. |
| 46A | 1.5 | 6.0 | 2.7 | 61 | 3 | 89 | R.S., C.S., L.F.P. |
| 46B | 1.0 | 5.9 | 2.6 | 63 | 8 | 71 | R.S. |

(continued)

## TABLE A-3. (continued)
### Sediment Pond WV-2

| COAGULANT | DOSAGE (ppm) | pH | TURBIDITY (JTU) | PERCENT REMOVAL | SUSPENDED SOLIDS (mg/l) | PERCENT REMOVAL | SETTLING CHARACTERISTICS |
|---|---|---|---|---|---|---|---|
| 46C | 0.5 | 6.0 | 3.3 | 46 | 10 | 64 | F.S. |
| 46D | 1.0 | 6.0 | 2.8 | 60 | 2 | 93 | R.S., L.F.P. |
| 46E | 0.5 | 5.7 | 4.5 | 36 | 10 | 64 | F.S. |
| 46F | 0.5 | 5.9 | 5.5 | 21 | 7 | 75 | R.S., L.F.P. |
| 61F | 0.5 | 6.1 | 5.7 | 19 | 20 | 29 | S.S., T.S. |
| 61F | 1.0 | 6.0 | 5.2 | 26 | 33 | 0 | S.S., T.S. |
| 61H | 1.5 | 6.0 | 6.0 | 14 | 10 | 64 | S.S. |
| 61K | 0.5 | 5.9 | 5.2 | 26 | 14 | 50 | S.S. |
| 71C | 0.5 | 6.0 | 4.0 | 43 | 1 | 96 | S.S. |

(continued)

## TABLE A-3. (continued)

**Sediment Pond WV-3**

| COAGULANT | DOSAGE (ppm) | pH | TURBIDITY (JTU) | PERCENT REMOVAL | SUSPENDED SOLIDS (mg/l) | PERCENT REMOVAL | SETTLING CHARAC-TERISTICS |
|---|---|---|---|---|---|---|---|
| 3M | 0.5 | 7.2 | 38 | 59 | 35 | 53 | F.S. |
| 6A | 3.0 | 6.9 | 12 | 87 | 24 | 67 | S.S., T.S. |
| 6B | 3.0 | 7.0 | 7.9 | 91 | 19 | 74 | F.S. |
| 6C | 3.0 | 6.7 | 9.6 | 90 | 18 | 76 | F.S. |
| 6D | 3.0 | 6.9 | 10 | 89 | 14 | 81 | F.S. |
| 6E | 3.0 | 6.9 | 5.6 | 94 | 20 | 73 | F.S. |
| 6F | 3.0 | 7.1 | 7.3 | 92 | 24 | 68 | F.S. |
| 15A | 3.0 | 7.2 | 14 | 85 | 26 | 65 | F.S. |
| 17A | 3.0 | 6.8 | 11 | 88 | 19 | 74 | R.S. |
| 17B | 3.0 | 7.1 | 7.8 | 92 | 19 | 74 | R.S. |
| 17C | 3.0 | 7.2 | 22 | 76 | 44 | 41 | S.S., T.S. |

(continued)

## TABLE A-3. (continued)
### Sediment Pond WV-3

| COAGULANT | DOSAGE (ppm) | pH | TURBIDITY (JTU) | PERCENT REMOVAL | SUSPENDED SOLIDS (mg/l) | PERCENT REMOVAL | SETTLING CHARAC-TERISTICS |
|---|---|---|---|---|---|---|---|
| 17H | 3.0 | 7.3 | 7.9 | 91 | 27 | 64 | R.S., T.S. |
| 30A | 1.5 | 6.9 | 32 | 65 | 26 | 65 | T.S., G.S. |
| 30B | 0.5 | 7.1 | 38 | 59 | 30 | 59 | T.S., G.S. |
| 30C | 3.0 | 7.2 | 20 | 78 | 9 | 88 | F.S. |
| 30D | 1.5 | 7.1 | 28 | 70 | 20 | 73 | F.S. |
| 31A | 3.0 | 7.0 | 9.3 | 90 | 26 | 66 | F.S. |
| 44B | 3.0 | 7.3 | 28 | 70 | 33 | 55 | S.S., T.S. |
| 46A | 3.0 | 6.7 | 24 | 74 | 27 | 64 | F.S. |
| 46B | 1.5 | 7.0 | 51 | 84 | 64 | 14 | R.S., T.S. |
| 46C | 0.5 | 6.5 | 20 | 78 | 20 | 73 | F.S., S.T.S. |
| 46D | 0.5 | 7.0 | 36 | 61 | 43 | 42 | F.S. |

(continued)

## TABLE A-3. (continued)
### Sediment Pond WV-3

| COAGULANT | DOSAGE (ppm) | pH | TURBIDITY (JTU) | PERCENT REMOVAL | SUSPENDED SOLIDS (mg/l) | PERCENT REMOVAL | SETTLING CHARAC-TERISTICS |
|---|---|---|---|---|---|---|---|
| 46E | 1.5 | 6.9 | 10 | 89 | 21 | 72 | F.S. |
| 46F | 3.0 | 7.3 | 17 | 82 | 34 | 54 | F.S. |
| 61F | 3.0 | 6.7 | 14 | 85 | 25 | 66 | S.S., T.S. |
| 61H | 3.0 | 6.9 | 13 | 86 | 20 | 73 | F.S. |
| 61K | 3.0 | 7.1 | 5.2 | 94 | 7 | 91 | F.S. |
| 61L | 3.0 | 7.4 | 6.4 | 93 | 13 | 82 | F.S. |
| 71C | 0.5 | 6.6 | 76 | 21 | 68 | 8 | S.S., T.S. |
| 315 | 3.0 | 7.3 | 17 | 82 | 31 | 58 | F.S. |

(continued)

## TABLE A-3. (continued)
### Sediment Pond WV-4

| COAGULANT | DOSAGE (ppm) | pH | TURBIDITY (JTU) | PERCENT REMOVAL | SUSPENDED SOLIDS (mg/l) | PERCENT REMOVAL | SETTLING CHARAC-TERISTICS |
|---|---|---|---|---|---|---|---|
| 3M | 1.5 | 5.9 | 90 | 90 | 66 | 94 | R.S., T.S. |
| 3M | 3.0 | 6.0 | 80 | 91 | 86 | 93 | R.S., T.S. |
| 6A | 5.0 | 6.0 | 100 | 89 | 85 | 93 | F.S., T.S. |
| 6B | 5.0 | 6.0 | 80 | 91 | 68 | 94 | F.S., T.S. |
| 6C | 5.0 | 5.9 | 61 | 93 | 49 | 96 | F.S., T.S. |
| 6D | 5.0 | 6.0 | 74 | 92 | 55 | 95 | S.S., V.T.S. |
| 6E | 5.0 | 6.0 | 70 | 92 | 29 | 98 | F.S., S.T.S |
| 6F | 5.0 | 6.0 | 58 | 93 | 48 | 96 | F.S., T.S. |
| 15A | 5.0 | 6.0 | 88 | 90 | 71 | 94 | F.S., T.S. |
| 17A | 5.0 | 6.3 | 39 | 96 | 37 | 97 | G.S., T.S. |
| 17B | 5.0 | 6.0 | 11 | 99 | 18 | 98 | R.S. |

(continued)

## TABLE A-3. (continued)
### Sediment Pond WV-4

| COAGULANT | DOSAGE (ppm) | pH | TURBIDITY (JTU) | PERCENT REMOVAL | SUSPENDED SOLIDS (mg/l) | PERCENT REMOVAL | SETTLING CHARAC-TERISTICS |
|---|---|---|---|---|---|---|---|
| 17C | 5.0 | 6.3 | 30 | 97 | 47 | 96 | F.S., T.S. |
| 17H | 5.0 | 6.1 | 22 | 98 | 40 | 97 | F.S. |
| 30A | 3.0 | 6.3 | 180 | 80 | 146 | 88 | S.S., T.S. |
| 30B | 5.0 | 6.1 | 120 | 86 | 120 | 90 | S.S., V.T.S., L.F.P. |
| 30C | 3.0 | 6.2 | 160 | 82 | 150 | 87 | S.S., V.T.S., L.F.P. |
| 30D | 5.0 | 6.1 | 180 | 80 | 134 | 89 | S.S., V.T.S., L.F.P. |
| 31A | 5.0 | 6.1 | 25 | 97 | 21 | 98 | R.S., S.T.S. |
| 44B | 5.0 | 6.3 | 32 | 96 | 36 | 97 | R.S., T.S. |
| 46A | 5.0 | 6.0 | 98 | 89 | 62 | 95 | R.S., V.T.S. |
| 46B | 5.0 | 6.2 | 180 | 80 | 220 | 81 | S.S., V.T.S. |
| 46C | 1.5 | 6.3 | 210 | 76 | 204 | 83 | S.S., V.T.S. |

(continued)

## TABLE A-3. (continued)

**Sediment Pond WV-4**

| COAGULANT | DOSAGE (ppm) | pH | TURBIDITY (JTU) | PERCENT REMOVAL | SUSPENDED SOLIDS (mg/l) | PERCENT REMOVAL | SETTLING CHARAC-TERISTICS |
|---|---|---|---|---|---|---|---|
| 46C | 5.0 | 6.2 | 140 | 84 | 218 | 81 | S.S., V.T.S. |
| 46D | 5.0 | 6.3 | 90 | 90 | 148 | 87 | S.S., L.F.P. |
| 46E | 1.5 | 6.2 | 32 | 96 | 43 | 96 | F.S., S.T.S. |
| 46E | 5.0 | 6.2 | 17 | 98 | 48 | 96 | R.S. |
| 46F | 3.0 | 6.3 | 24 | 97 | 35 | 97 | S.S., T.S. |
| 61F | 5.0 | 6.0 | 160 | 82 | 158 | 87 | S.S., T.S. |
| 61A | 5.0 | 6.0 | 210 | 76 | 170 | 86 | V.S.S., V.T.S. |
| 61K | 5.0 | 6.0 | 53 | 94 | 46 | 96 | R.S., T.S. |
| 61L | 5.0 | 6.0 | 74 | 92 | 88 | 93 | R.S., T.S. |
| 71C | 5.0 | 6.3 | 400 | 54 | 232 | 80 | S.S, V.T.S. |
| Lime | 1.2 | 10.7 | 32 | 96 | 57 | 94 | L.F.P. |

**(continued)**

## TABLE A-3. (continued)

**Sediment Pond WV-4**

| COAGULANT | DOSAGE (ppm) | pH | TURBIDITY (JTU) | PERCENT REMOVAL | SUSPENDED SOLIDS (mg/l) | PERCENT REMOVAL | SETTLING CHARAC-TERISTICS |
|---|---|---|---|---|---|---|---|
| Alum | 110.6 | 3.1 | 120 | 86 | 180 | 85 | V.S.S., V.T.S. |

(continued)

## TABLE A-3. (continued)

**Sediment Pond KY-1**

| COAGULANT | DOSAGE (ppm) | pH | TURBIDITY (JTU) | PERCENT REMOVAL | SUSPENDED SOLIDS (mg/l) | PERCENT REMOVAL | SETTLING CHARAC-TERISTICS |
|---|---|---|---|---|---|---|---|
| 3M | 1.5 | 7.0 | 30 | 86 | 18 | 90 | R.S., T.S., L.F.P. |
| 6A | 5.0 | 6.5 | 52 | 75 | 52 | 82 | S.S., T.S. |
| 6B | 5.0 | 6.0 | 52 | 75 | 34 | 82 | S.S., T.S. |
| 6C | 5.0 | 6.6 | 46 | 78 | 40 | 78 | S.S., T.S. |
| 6D | 5.0 | 6.7 | 46 | 78 | 50 | 73 | S.S., T.S. |
| 6E | 5.0 | 6.8 | 43 | 80 | 35 | 81 | S.S., T.S. |
| 6F | 5.0 | 6.8 | 69 | 67 | 60 | 68 | S.S., T.S. |
| 15A | 5.0 | 6.8 | 70 | 67 | 70 | 62 | S.S., T.S. |
| 17A | 5.0 | 6.8 | 58 | 72 | 67 | 64 | S.S., T.S. |
| 17B | 5.0 | 6.8 | 40 | 81 | 92 | 51 | S.S., T.S. |
| 17C | 5.0 | 6.8 | 43 | 80 | 43 | 77 | S.S., T.S. |

**(continued)**

## TABLE A-3. (continued)

**Sediment Pond KY-1**

| COAGULANT | DOSAGE (ppm) | pH | TURBIDITY (JTU) | PERCENT REMOVAL | SUSPENDED SOLIDS (mg/l) | PERCENT REMOVAL | SETTLING CHARAC-TERISTICS |
|---|---|---|---|---|---|---|---|
| 17H | 5.0 | 6.8 | 52 | 75 | 74 | 60 | S.S., T.S. |
| 30A | 1.5 | 6.9 | 38 | 82 | 34 | 82 | R.S., T.S., L.F.P. |
| 30B | 1.5 | 6.9 | 28 | 87 | 48 | 74 | R.S., T.S., L.F.P. |
| 30C | 1.5 | 7.0 | 70 | 67 | 58 | 69 | R.S., T.S. |
| 30D | 5.0 | 7.0 | 50 | 81 | 70 | 62 | R.S., T.S., L.F.P. |
| 31A | 5.0 | 6.8 | 44 | 79 | 46 | 75 | R.S., T.S. |
| 44B | 5.0 | 6.9 | 24 | 89 | 66 | 65 | R.S., T.S., G.S., L.F.P. |
| 46A | 1.5 | 6.9 | 42 | 80 | 34 | 82 | S.S., T.S. |
| 46B | 5.0 | 6.8 | 46 | 78 | 64 | 66 | R.S., T.S., L.F.P. |
| 46C | 1.5 | 6.6 | 87 | 59 | 94 | 50 | R.S., T.S., L.F.P. |
| 46D | 3.0 | 6.9 | 33 | 84 | 60 | 73 | R.S., T.S., L.F.P. |

(continued)

## TABLE A-3. (continued)
### Sediment Pond KY-1

| COAGULANT | DOSAGE (ppm) | pH | TURBIDITY (JTU) | PERCENT REMOVAL | SUSPENDED SOLIDS (mg/l) | PERCENT REMOVAL | SETTLING CHARAC-TERISTICS |
|---|---|---|---|---|---|---|---|
| 46E | 5.0 | 6.9 | 14 | 93 | 19 | 90 | R.S., T.S., L.F.P. |
| 46F | 3.0 | 6.8 | 16 | 92 | 15 | 92 | R.S., T.S., L.F.P. |
| 61F | 5.0 | 6.0 | 69 | 67 | 64 | 66 | S.S., T.S. |
| 61H | 5.0 | 6.1 | 85 | 60 | 82 | 56 | S.S., T.S. |
| 61K | 5.0 | 6.6 | 92 | 56 | 62 | 67 | S.S., T.S. |
| 61L | 5.0 | 6.6 | 86 | 59 | 81 | 56 | S.S., T.S. |
| 71C | 5.0 | 6.6 | 14 | 93 | 16 | 91 | G.S., T.S., S.F.P. |
| 315 | 5.0 | 6.9 | 44 | 79 | 49 | 74 | S.S., T.S. |
| Lime | 1.7 | 10.9 | 34 | 84 | 74 | 60 | R.S. |
| Alum | 106.5 | 3.1 | 43 | 80 | 66 | 65 | V.S.S., V.T.S. |

## TABLE A-4. BENCH SCALE TREATABILITY STUDY RESULTS
### Magnifloc 587C

| DOSAGE (ppm) | TEST WATER | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | PA-1 | | WV-1 | | WV-2A | | WV-3 | | WV-4 | | KY-1 | |
| | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) |
| RAW | 880 | 437 | 440 | 2,306 | 64 | 148 | 200 | 4,510 | 440 | 2,454 | 680 | 606 |
| CONTROL | 20 | 32 | 44 | 29 | 7.0 | 28 | 92 | 74 | 880 | 1,176 | 210 | 186 |
| 0.5 | 3.6 | 1 | 7.1 | 12 | 5.1 | 11 | 28 | 20 | * | | | |
| 1.0 | 3.5 | 12 | 6.4 | 17 | 5.2 | 7 | | | | | | |
| 1.5 | 3.4 | 14 | 5.2 | 12 | 5.0 | 11 | 9.0 | 20 | 200 | 140 | 82 | 70 |
| 2.0 | | | 8.9 | 6 | | | | | | | | |
| 3.0 | | | 6.5 | 5 | | | 5.6 | 20 | 100 | 90 | 54 | 43 |
| 4.0 | | | 6.4 | 6 | | | | | | | | |
| 5.0 | | | | | | | 9.2 | 14 | 70 | 29 | 43 | 35 |

*Blank spaces indicate no test at this dosage

(continued)

## TABLE A-4. (continued)

**Magnifloc 587C**

| DOSAGE (ppm) | TEST WATER | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | PA-1 | | WV-1 | | WV-2A | | WV-3 | | WV-4 | | KY-1 | |
| | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) |
| 6.0 | | | | | | | | | 9.6 | 12 | 12 | 12 |
| 7.0 | | | | | | | 26 | 33 | | | | |
| 8.0 | | | | | | | | | 8.8 | 12 | 12 | 19 |
| 10.0 | | | | | | | 33 | 41 | 9.2 | 14 | 14 | 19 |

(continued)

## TABLE A-4. (continued)

**M-502**

| DOSAGE (ppm) | TEST WATER | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | PA-1 | | WV-1 | | WV-2A | | WV-3 | | WV-4 | | KY-1 | |
| | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) |
| RAW | 880 | 437 | 440 | 2,306 | 64 | 148 | 200 | 4,510 | 440 | 2,454 | 680 | 606 |
| CONTROL | 20 | 32 | 44 | 29 | 7.0 | 28 | 92 | 74 | 880 | 1,176 | 210 | 186 |
| 0.5 | 4.4 | 5 | 14 | 21 | 5.5 | 5 | 64 | 72 | | | | |
| 1.0 | 3.3 | 1 | 8.4 | 13 | 6.1 | 18 | | | | | | |
| 1.5 | 3.4 | 1 | 4.9 | 13 | 6.7 | 21 | 14 | 34 | 90 | 86 | 100 | 102 |
| 2.0 | | | 5.2 | 4 | | | | | | | | |
| 3.0 | | | 6.3 | 7 | | | 7.9 | 27 | 31 | 52 | 80 | 92 |
| 4.0 | | | 6.5 | 15 | | | | | | | | |
| 5.0 | | | | | | | 27 | 44 | 22 | 40 | 52 | 74 |

(continued)

## TABLE A-4. (continued)

M-502

| DOSAGE (ppm) | TEST WATER | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | PA-1 | | WV-1 | | WV-2A | | WV-3 | | WV-4 | | KY-1 | |
| | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) |
| 6.0 | | | | | | | | | 16 | 11 | 20 | 22 |
| 7.0 | | | | | | | 38 | 43 | | | | |
| 8.0 | | | | | | | | | 13 | 23 | 20 | 21 |
| 10.0 | | | | | | | 43 | 65 | 13 | 23 | 20 | 21 |

(continued)

## TABLE A-4. (continued)
### Amerfloc 485

| DOSAGE (ppm) | TEST WATER | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | PA-1 | | WV-1 | | WV-2A | | WV-3 | | WV-4 | | KY-1 | |
| | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) |
| RAW | 880 | 437 | 440 | 2,306 | 64 | 148 | 200 | 4,510 | 440 | 2,454 | 680 | 606 |
| CONTROL | 20 | 32 | 44 | 29 | 7.0 | 28 | 92 | 74 | 880 | 1,176 | 210 | 186 |
| 0.5 | 4.3 | 6 | 18 | 31 | 5.3 | 12 | 28 | 39 | | | | |
| 1.0 | 3.9 | 12 | 12 | 18 | 6.2 | 11 | | | | | | |
| 1.5 | 5.7 | 19 | 8.0 | 8 | 6.2 | 11 | 9.3 | 26 | 90 | 79 | 81 | 86 |
| 2.0 | | | 8.4 | 9 | | | | | | | | |
| 3.0 | | | 8.6 | 10 | | | 9.0 | 25 | 37 | 27 | 51 | 56 |
| 4.0 | | | 7.2 | 13 | | | | | | | | |
| 5.0 | | | | | | | 38 | 46 | 25 | 21 | 44 | 46 |

(continued)

## TABLE A-4. (continued)

**Amerfloc 485**

| DOSAGE (ppm) | TEST WATER | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | PA-1 | | WV-1 | | WV-2A | | WV-3 | | WV-4 | | KY-1 | |
| | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) |
| 6.0 | | | | | | | | | 6.6 | 10 | 14 | 21 |
| 7.0 | | | | | | | 54 | 62 | | | | |
| 8.0 | | | | | | | | | 6.2 | 11 | 14 | 21 |
| 10.0 | | | | | | | 56 | 66 | 7.2 | 11 | 14 | 18 |

(continued)

## TABLE A-4. (continued)
### Polyfloc C

| DOSAGE (ppm) | TEST WATER | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | PA-1 | | WV-1 | | WV-2A | | WV-3 | | WV-4 | | KY-1 | |
| | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) |
| RAW | 880 | 437 | 440 | 2,306 | 64 | 148 | 200 | 4,510 | 440 | 2,454 | 680 | 606 |
| CONTROL | 20 | 32 | 44 | 29 | 7.0 | 28 | 92 | 74 | 880 | 1,176 | 210 | 186 |
| 0.5 | 4.2 | 16 | 18 | 19 | 2.3 | 22 | 98 | 116 | | | | |
| 1.0 | 2.8 | 19 | 17 | 12 | 2.4 | 22 | | | | | | |
| 1.5 | 3.6 | 6 | 20 | 11 | 2.7 | 4 | 54 | 66 | 100 | 114 | 34 | 82 |
| 2.0 | 6.8 | 15 | 20 | 30 | 2.2 | 7 | | | | | | |
| 3.0 | 8.5 | 21 | 20 | 52 | | | 28 | 33 | 53 | 45 | 30 | 65 |
| 4.0 | | | 24 | 50 | | | | | | | | |
| 5.0 | | | | | | | 9.3 | 10 | 32 | 36 | 24 | 66 |

(continued)

## TABLE A-4. (continued)

**Polyfloc C**

| DOSAGE (ppm) | TEST WATER | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | PA-1 | | WV-1 | | WV-2A | | WV-3 | | WV-4 | | KY-1 | |
| | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) |
| 6.0 | | | | | | | | | 30 | 32 | 28 | 14 |
| 7.0 | | | | | | | 10 | 24 | | | | |
| 8.0 | | | | | | | 10 | 30 | 32 | 25 | 32 | 34 |
| 10.0 | | | | | | | | | 36 | 50 | 33 | 44 |

(continued)

## TABLE A-4. (continued)

**Hercofloc 812**

| DOSAGE (ppm) | TEST WATER | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | PA-1 | | WV-1 | | WV-2A | | WV-3 | | WV-4 | | KY-1 | |
| | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) |
| RAW | 880 | 437 | 440 | 2,306 | 64 | 148 | 200 | 4,510 | 440 | 2,454 | 680 | 606 |
| CONTROL | 20 | 32 | 44 | 29 | 7.0 | 28 | 92 | 74 | 880 | 1,176 | 210 | 186 |
| 0.5 | 6.9 | 5 | 5.1 | 8 | 2.1 | 9 | 74 | 62 | | | | |
| 1.0 | 12 | 9 | 5.2 | 1 | 1.9 | 7 | | | | | | |
| 1.5 | 9 | 8 | 6.5 | 6 | 2.7 | 3 | 29 | 26 | 360 | 240 | 42 | 34 |
| 3.0 | | | | | | | 24 | 27 | 140 | 108 | 42 | 43 |
| 5.0 | | | | | | | 7.3 | 8 | 98 | 62 | 40 | 45 |
| 6.0 | | | | | | | | | 28 | 19 | | |
| 7.0 | | | | | | | 6.7 | 4 | | | | |

(continued)

## TABLE A-4. (continued)

**Hercofloc 812**

| DOSAGE (ppm) | TEST WATER | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | PA-1 | | WV-1 | | WV-2A | | WV-3 | | WV-4 | | KY-1 | |
| | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) |
| 8.0 | | | | | | | | | 30 | 21 | | |
| 10.0 | | | | | | | 6.6 | 22 | 30 | 30 | | |

(continued)

## TABLE A-4. (continued)

**Hercofloc 831**

| DOSAGE (ppm) | TEST WATER | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | PA-1 | | WV-1 | | WV-2A | | WV-3 | | WV-4 | | KY-1 | |
| | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) |
| RAW | 880 | 437 | 440 | 2,306 | 64 | 148 | 200 | 4,510 | 440 | 2,454 | 680 | 606 |
| CONTROL | 20 | 32 | 44 | 29 | 7.0 | 28 | 92 | 74 | 880 | 1,176 | 210 | 186 |
| 0.5 | 15 | 15 | 15 | 31 | 2.8 | 11 | 36 | 43 | | | 46 | 42 |
| 1.0 | 8.7 | 6 | 15 | 26 | 2.8 | 2 | 24 | 14 | 34 | 20 | | |
| 1.5 | 6.8 | 1 | 17 | 32 | 3.3 | 3 | 57 | 94 | 140 | 182 | 43 | 50 |
| 2.0 | | | 31 | 30 | | | | | | | | |
| 2.5 | 10 | 34 | | | | | 34 | 20 | | | | |
| 3.0 | 22 | 44 | 32 | 30 | | | 53 | 92 | 90 | 152 | 33 | 60 |
| 4.0 | | | 31 | 30 | | | | | | | | |

(continued)

## TABLE A-4. (continued)

**Hercofloc 831**

| DOSAGE (ppm) | TEST WATER | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | PA-1 | | WV-1 | | WV-2A | | WV-3 | | WV-4 | | KY-1 | |
| | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) |
| 5.0 | | | | | | | 38 | 38 | 90 | 148 | 40 | 56 |
| 6.0 | | | | | | | | | 90 | 78 | | |
| 7.0 | | | | | | | | | | | 40 | 44 |
| 8.0 | | | | | | | | | 90 | 64 | | |
| 10.0 | | | | | | | | | 88 | 64 | 30 | 44 |

(continued)

## TABLE A-4. (continued)

**Superfloc 315**

| DOSAGE (ppm) | TEST WATER | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | PA-1 | | WV-1 | | WV-2A | | WV-3 | | WV-4 | | KY-1 | |
| | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) |
| RAW | 880 | 437 | 440 | 2,306 | 64 | 148 | 200 | 4,510 | 440 | 2,454 | 680 | 606 |
| CONTROL | 20 | 32 | 44 | 29 | 7.0 | 28 | 92 | 74 | 880 | 1,176 | 210 | 186 |
| 0.5 | 6.8 | 15 | 18 | 37 | 2.8 | 9 | 74 | 60 | 90 | 95 | | |
| 1.0 | 6.9 | 17 | 10 | 35 | 2.5 | 9 | | | 52 | 55 | | |
| 1.5 | 6.8 | 17 | 8.0 | 29 | 2.6 | 10 | 26 | 35 | 26 | 44 | 75 | 64 |
| 2.0 | 6.8 | 16 | 6.4 | 13 | 2.7 | 9 | | | | | | |
| 3.0 | 6.4 | 21 | 6.6 | 8 | 2.8 | 14 | 17 | 31 | 19 | 1 | 54 | 54 |
| 4.0 | | | 6.2 | 6 | | | | | | | | |
| 5.0 | | | 6.4 | 9 | 2.6 | 16 | 7.0 | 19 | 12 | 3 | 44 | 49 |

(continued)

## TABLE A-4. (continued)

**Superfloc 315**

| DOSAGE (ppm) | TEST WATER | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | PA-1 | | WV-1 | | WV-2A | | WV-3 | | WV-4 | | KY-1 | |
| | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) | TURB (JTU) | TSS (mg/l) |
| 6.0 | | | | | | | | | 12 | 13 | 18 | 19 |
| 7.0 | | | | | | | 7.2 | 19 | | | | |
| 8.0 | | | | | | | | | 14 | 20 | 19 | 26 |
| 10.0 | | | | | | | 5.0 | 12 | 18 | 23 | 18 | 27 |

## TABLE A-5. SUMMARY OF BENCH-SCALE TREATABILITY STUDY

Optimum Dosage (21° C)*

| TEST WATER | [redacted] | MAGNIFLOC 587C | M-502 | AMERFLOC 485 | HERCOFLOC 812 | HERCOFLOC 831 | POLYFLOC C | SUPERFLOC 315 |
|---|---|---|---|---|---|---|---|---|
| PA-1 | TURB | 1.5 | 1.0 | 1.0 | 0.5 | 1.5 | 1.0 | 3.0 |
| | TSS | 0.5 | 1.0 | 0.5 | 0.5 | 1.5 | 1.5 | 0.5 |
| WV-1 | TURB | 1.5 | 1.5 | 4.0 | 0.5 | 0.5 | 1.0 | 4.0 |
| | TSS | 3.0 | 3.0 | 2.0 | 1.0 | 1.0 | 1.5 | 4.0 |
| WV-2A | TURB | 1.5 | 0.5 | 0.5 | 1.0 | 0.5 | 0.5 | 1.0 |
| | TSS | 1.0 | 0.5 | 1.0 | 1.5 | 1.0 | 2.0 | 0.5 |
| WV-3 | TURB | 3.0 | 3.0 | 3.0 | 10.0 | 1.0 | 5.0 | 10.0 |
| | TSS | 5.0 | 3.0 | 3.0 | 7.0 | 1.0 | 5.0 | 10.0 |
| WV-4 | TURB | 8.0 | 8.0 | 5.0 | 6.0 | 1.0 | 6.0 | 5.0 |
| | TSS | 6.0 | 6.0 | 6.0 | 6.0 | 8.0 | 8.0 | 3.0 |
| KY-1 | TURB | 6.0 | 6.0 | 6.0 | 5.0 | 10.0 | 5.0 | 6.0 |
| | TSS | 6.0 | 8.0 | 6.0 | 1.5 | 0.5 | 6.0 | 6.0 |

(continued)

* Optimum dosages in mg/l.

## TABLE A-5. (continued)

At Optimum Dosage (21° C)*

| TEST WATER | | MAGNIFLOC 587C | M-502 | AMERFLOC 485 | HERCOFLOC 812 | HERCOFLOC 831 | POLYFLOC C | SUPERFLOC 315 |
|---|---|---|---|---|---|---|---|---|
| PA-1 | TURB | 83.0 | 83.5 | 80.5 | 65.5 | 66.0 | 86.0 | 68.0 |
| | TSS | 96.8 | 96.8 | 81.3 | 84.4 | 97.8 | 97.8 | 53.1 |
| WV-1 | TURB | 88.2 | 88.2 | 83.6 | 88.4 | 66.0 | 61.4 | 86.0 |
| | TSS | 82.8 | 76.0 | 69.0 | 96.5 | 10.3 | 62.1 | 79.3 |
| WV-2A | TURB | 28.6 | 21.4 | 24.3 | 72.9 | 60.0 | 68.6 | 64.3 |
| | TSS | 75.0 | 82.1 | 60.7 | 86.0 | 92.9 | 90.0 | 67.9 |
| WV-3 | TURB | 93.9 | 91.4 | 90.2 | 92.7 | 74.0 | 89.9 | 45.7 |
| | TSS | 81.1 | 63.5 | 66.2 | 94.6 | 81.1 | 86.5 | 83.8 |
| WV-4 | TURB | 99.0 | 98.5 | 99.3 | 96.8 | 96.1 | 96.6 | 98.6 |
| | TSS | 99.0 | 93.5 | 99.1 | 98.4 | 95.0 | 97.9 | 99.9 |
| KY-1 | TURB | 94.3 | 90.5 | 93.3 | 80.0 | 85.7 | 88.6 | 91.4 |
| | TSS | 93.5 | 88.7 | 88.7 | 81.7 | 77.4 | 92.5 | 89.8 |

* Efficiency of removal in percent.

**TECHNICAL REPORT DATA**
*(Please read Instructions on the reverse before completing)*

| 1. REPORT NO. | 2. | 3. RECIPIENT'S ACCESSION NO. |
|---|---|---|
| EPA-600/7-80-072 | | |

**4. TITLE AND SUBTITLE**
DEVELOPMENT OF METHODS TO IMPROVE PERFORMANCE OF SURFACE MINE SEDIMENT BASINS - Phase I

**5. REPORT DATE**
April 1980 issuing date

**6. PERFORMING ORGANIZATION CODE**
M7-42

**7. AUTHOR(S)**
Charles E. Ettinger

**8. PERFORMING ORGANIZATION REPORT NO.**

**9. PERFORMING ORGANIZATION NAME AND ADDRESS**
SKELLY and LOY
Engineers - Consultants
2601 North Front Street
Harrisburg, Pennsylvania 17110

**10. PROGRAM ELEMENT NO.**

**11. CONTRACT/GRANT NO.**
68-03-2677

**12. SPONSORING AGENCY NAME AND ADDRESS**
Industrial Environmental Research Laboratory
Office of Research and Development
U.S. Environmental Protection Agency
Cincinnati, Ohio 45268

**13. TYPE OF REPORT AND PERIOD COVERED**
Phase I - 8 months

**14. SPONSORING AGENCY CODE**
EPA/600/12

**15. SUPPLEMENTARY NOTES**

**16. ABSTRACT**

The control of erosion and sedimentation from disturbed lands is a subject of increasing interest, particularly in the area of surface mining. Because of the hydrologic conditions and steep terrain in Appalachia, a large share of the eroded material comes from surface mines, largely controlled through the use of sedimentation ponds. With the passage of the 1977 Clean Water Act which has a specific effluent limitation of total suspended solids from surface mine sedimentation basins, the Environmental Protection Agency has mandated that sediment basins be designed to achieve a specific effluent quality. Two methods for achieving this goal have been investigated during this study: physical modifications to sediment basin design parameters and the use of chemical coagulants. As a result of this study, methods have been determined for upgrading sediment pond efficiencies by physical modifications and coagulant usage.

**17. KEY WORDS AND DOCUMENT ANALYSIS**

| a. DESCRIPTORS | b. IDENTIFIERS/OPEN ENDED TERMS | c. COSATI Field/Group |
|---|---|---|
| Sedimentation<br>Flocculating<br>Coagulation<br>Surface Coal Mining<br>Ponds<br>Settling | West Virginia<br>Pennsylvania<br>Kentucky<br>Appalachia | 68D<br>13B |

| 18. DISTRIBUTION STATEMENT | 19. SECURITY CLASS (This Report) | 21. NO. OF PAGES |
|---|---|---|
| Release to Public | Unclassified | 184 |
| | 20. SECURITY CLASS (This page) | 22. PRICE |
| | Unclassified | |

EPA Form 2220-1 (9-73)



best copy available

☆ U.S. GOVERNMENT PRINTING OFFICE: 1980-657-146/5670

United States
Environmental Protection
Agency

Center for Environmental Research
Information
Cincinnati OH 45268

Postage and
Fees Paid
Environmental
Protection
Agency
EPA-335

Official Business
Penalty for Private Use, $300

Special Fourth-Class Rate
Book

Please make all necessary changes on the above label, detach or copy, and return to the address in the upper left-hand corner.

If you do not wish to receive these reports CHECK HERE ☐; detach, or copy this cover, and return to the address in the upper left-hand corner.

EPA-600/7-80-072